


DBL-810

| DATE | CHANGES | REV |
|----------|--------------|------|
| 07.15.08 | Original | 1.00 |
| 09.19.08 | Updated Info | 1.00 |

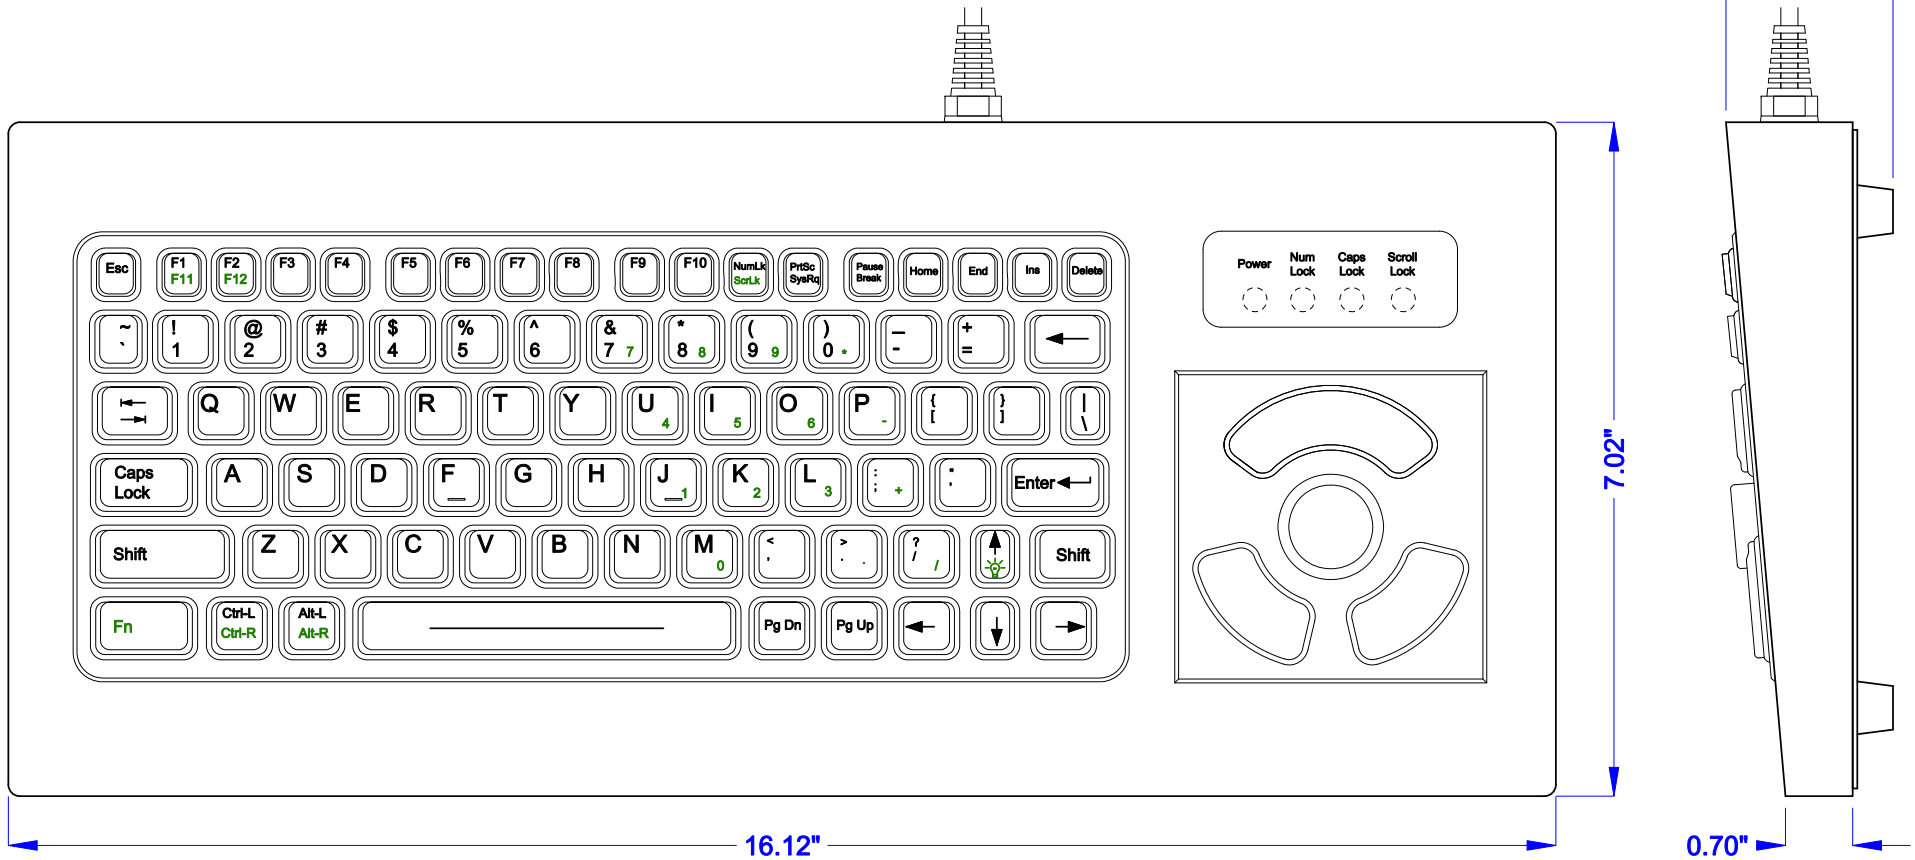

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

POWER

PS2: KEYBOARD: 200mA@5V (from Keyboard port)
POINTER: 35mA@5V (from Mouse port)
USB: 235mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)
OPERATING: -4°F to +140°F (-20°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

3.75 lbs +/- 0.10 lbs (1.70 kg +/- 0.05 kg)

ENCLOSURE CASE: Stainless Steel

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2