


DT-102-SS

DATE	CHANGES	INTL	REV
09.30.09	Original	JB	1.0
11.12.10	Updated operating temperature	JMW	1.1
11.30.11	Updated Case Dimensions	TWH	1.2
03.28.13	Updated operating temperature	TWH	1.3

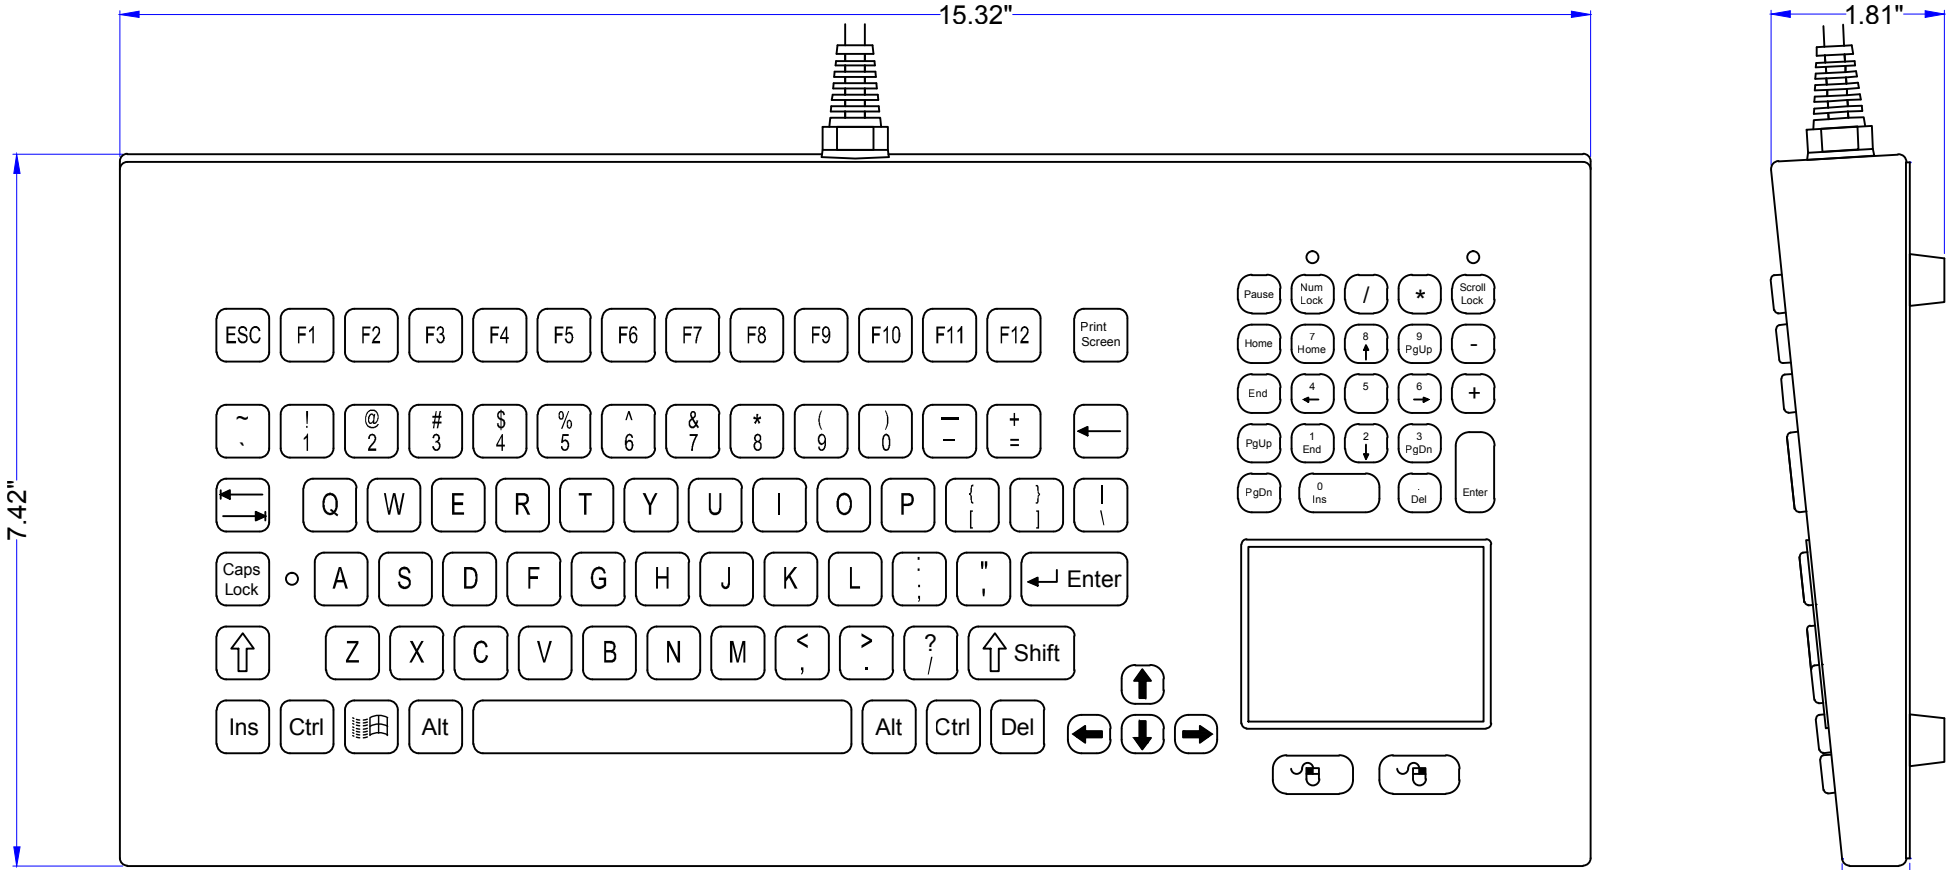

KEY SWITCH

MATERIAL: Brushed Stainless Steel
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.079 in.
 ACTUATION FORCE: 4.23 oz. +/- 0.18oz (120g +/- 5g)
 FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +149°F (-40°C to +65°C)
 OPERATING: -40°F to +140°F (-40°C to +60°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

POWER

PS2:
 KEYBOARD: 50mA@5V (from Keyboard port)
 POINTER: 10mA@5V (from Mouse port)
 USB: 60mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

5.50 lbs +/- 0.10 lbs (2.49 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

NO REVISION TO DRAWING WITHOUT PRIOR FM APPROVAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2011 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: DT-102-SS

Drawing Title: DT-102-SS-MKT

Drawing Number: MKT0219


Revision: 1.3

Sheet: 1 OF 2

Date: 03.28.13

TWH

DT-102-SS BACK / MOUNTING

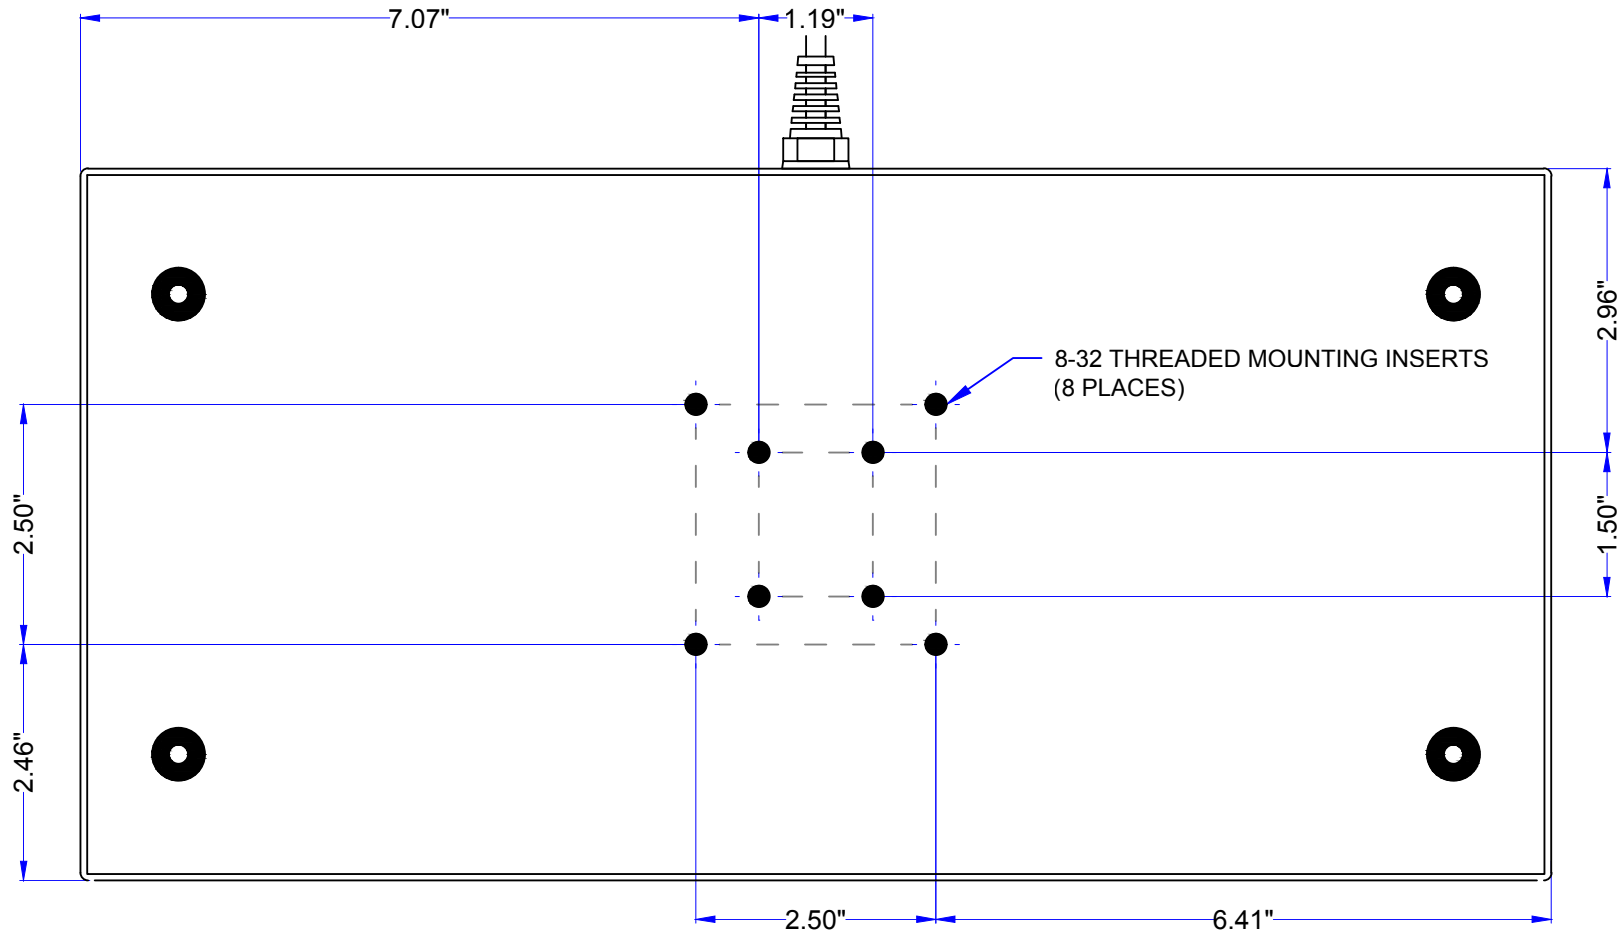

NO REVISION TO DRAWING WITHOUT PRIOR FM APPROVAL

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgepoint Dr. Suite 235
Austin, Texas 78754

©2011 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: DT-102-SS
Drawing Title: DT-102-SS-MKT

Drawing Number: MKT0219
Revision: 1.3

Sheet: 2 OF 2
Date: 03.28.13
TWH