


DT-810-TB

DATE	CHANGES	INTL	REV
05.13.10	Original	JMW	1.0
08.12.10	Fixed text on DWG to PDF, Fixed USB Power	JMW	1.1

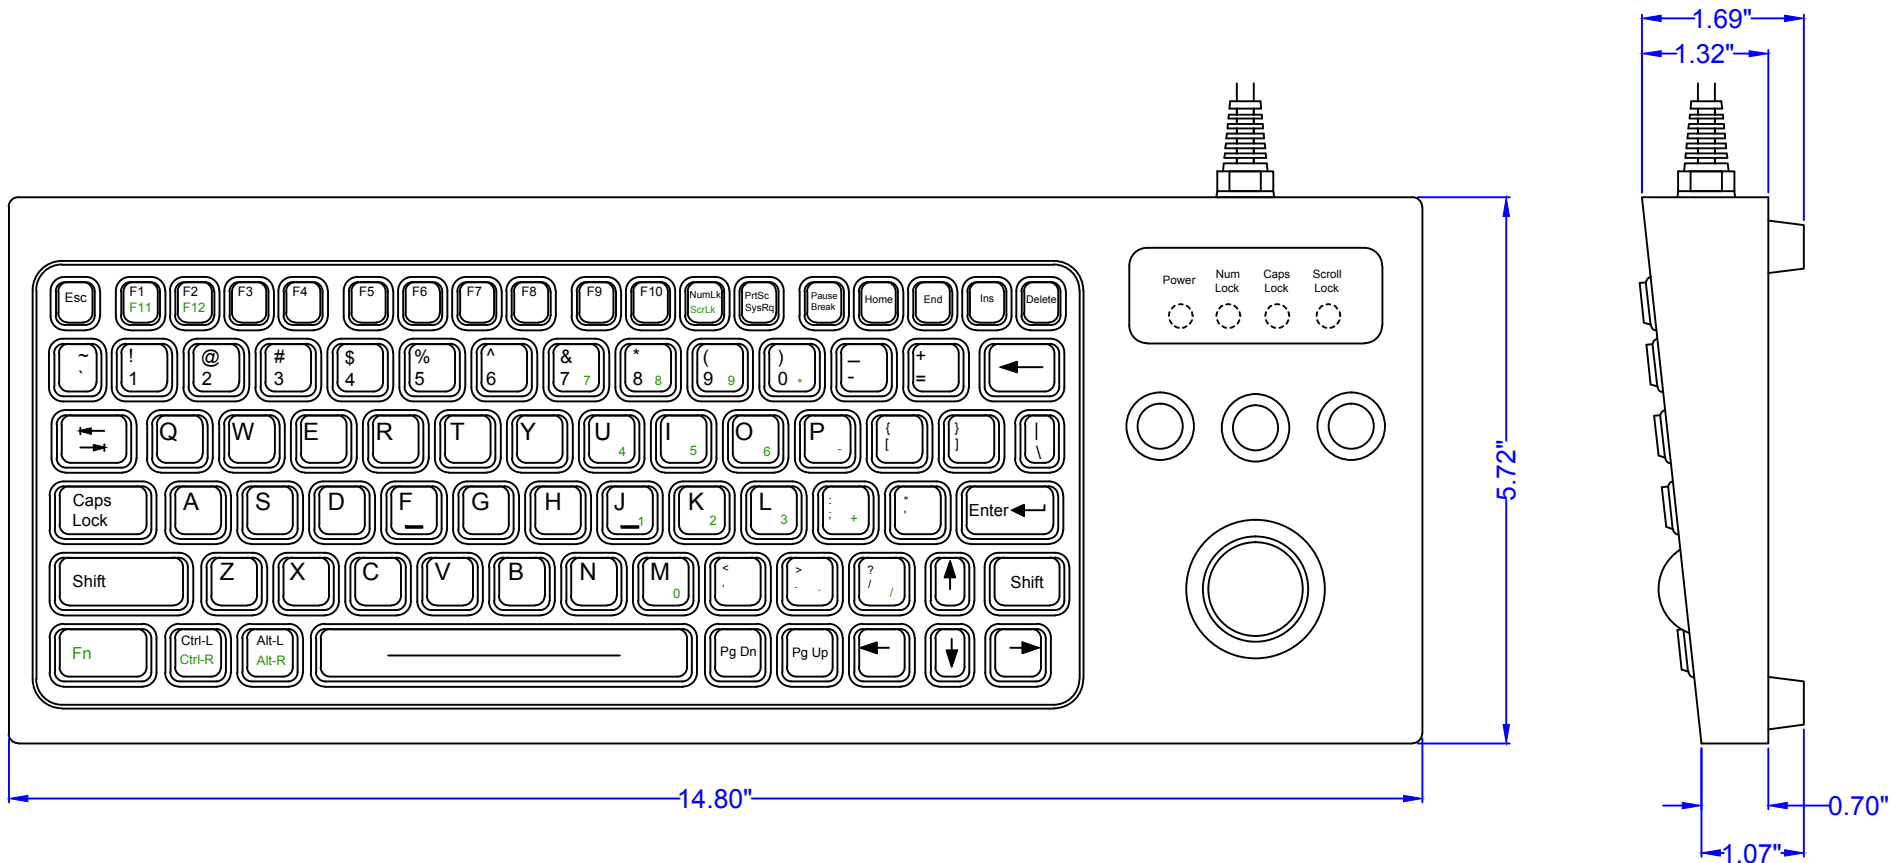

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

PS2:
 KEYBOARD: 50mA@5V (from Keyboard port)
 TRACK BALL: 20mA@5V (from Mouse port)
 USB: 70mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +185°F (-40°C to +85°C)
 OPERATING: +32°F to +149°F (0°C to +65°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

4.00 lbs +/- 0.10 lbs (1.81 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2010 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: DT-810-TB

Drawing Title: DT-810-TB-MKT

Drawing Number: MKT0227

Revision: 1.1

Sheet: 1 OF 2

Date: 08.12.10

JMW