


IK-KV-13.3W

DATE	CHANGES	INTL.	REV.
08.17.18	ORIGINAL	RD	1.0

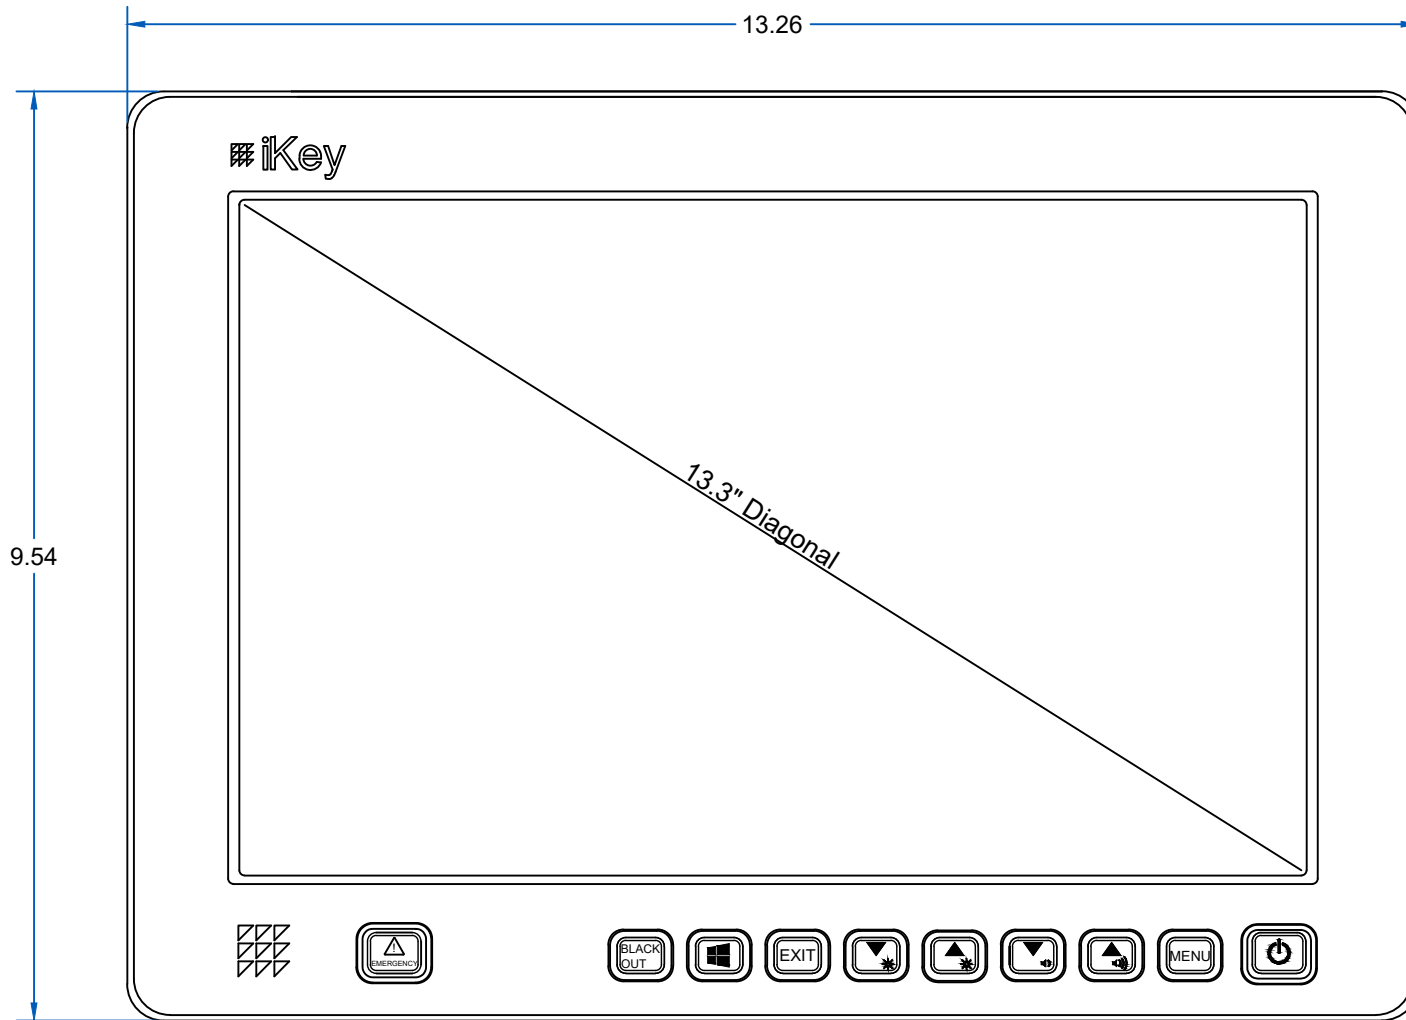

DISPLAY
 SCREEN SIZE: 12.1" Diagonal
 RESOLUTION: 1024 x 768
 ASPECT RATIO: 4:3
 BRIGHTNESS: 1000 nits
 TOUCHSCREEN: Two-Point Capacitive Touch

TEMPERATURE RANGE
 STORAGE: -40°F to +185°F (-40°C to +85°C)
 OPERATING: -22°F to +176°F (-30°C to +80°C)

POWER
 INPUT: 12VDC

WEIGHT
 5.2 lbs (2.35 kg)

PROPRIETARY AND CONFIDENTIAL



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2018 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: IK-KV-13.3W

Drawing Title: IK-KV-13.3W-MKT

Drawing Number: MKT0468

Revision: 1.0

Sheet: 1 OF 2

Date: 08.16.18


ALH

MOUNTING AND I/O DETAIL

I/O Ports	
1	Line In
2	HDMI
3	VGA
4	Display Port
5	+12V DC IN
6	Serial Out
7	USB Out (touchscreen)
8	2x USB 2.0
9	2x USB 2.0

Installation Instructions:

- 1) Remove 4x included M6 bolts
- 2) Align the monitor mounting holes with the 100mm VESA pattern of the panel/mount
- 3) Thread the M6 bolts through the panel/mount into the monitor and tighten
- 4) Choose the desired video input: HDMI, VGA, DisplayPort, and connect the appropriate cable to the monitor port. If VGA is used, audio will need to be connected from the host to port #1 via 1/8" audio cable.
- 5) If the touchscreen functionality is required, the USB Type B cable will need to be connected to the monitor port #7, and to an open USB port on the host computer.
- 5a) Connecting this USB Type B cable between monitor and host will allow the use of the monitor touchscreen and 4x USB ports.
- 6) Connect supplied power cable to port #5

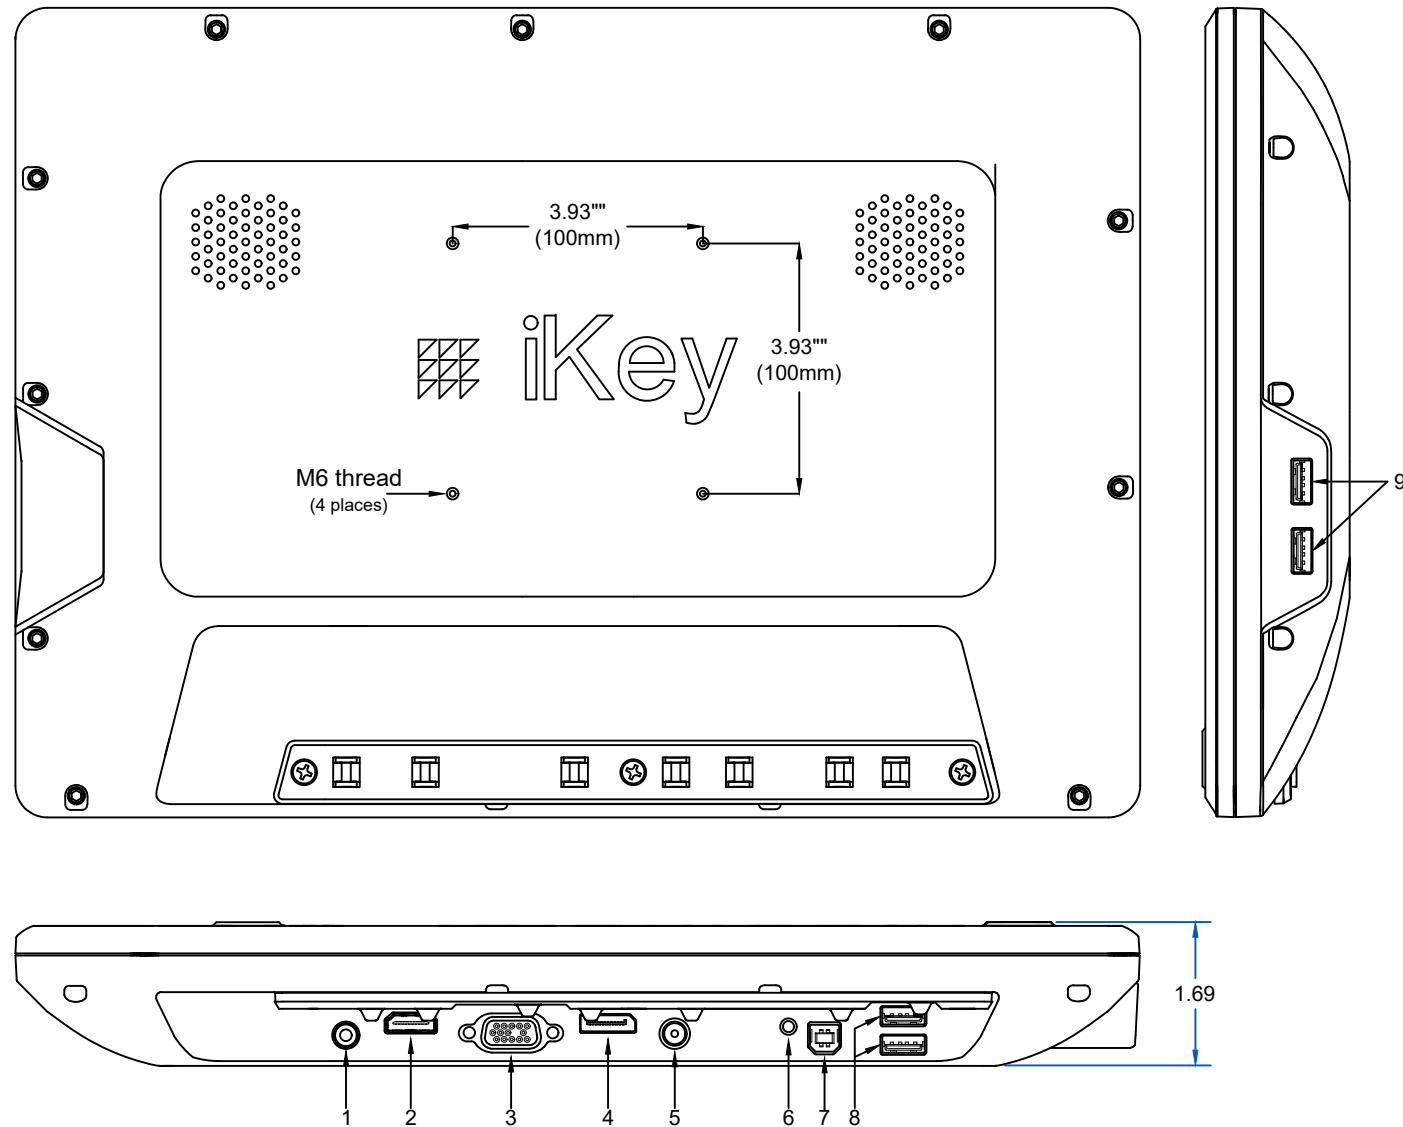

PROPRIETARY AND CONFIDENTIAL

All Dimensions in Inches unless otherwise specified



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2018 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: IK-KV-13.3W

Drawing Title: IK-KV-13.3W-MKT

Drawing Number: MKT0468

Revision: 1.0

Sheet: 2 OF 2

Date: 08.16.18

ALH