
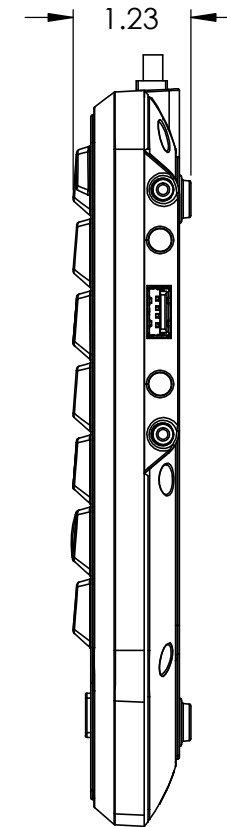


IK-TR-911-TP

DATE	CHANGES	INTL	REV
02/07/17	ORIGINAL	IGH	1.0

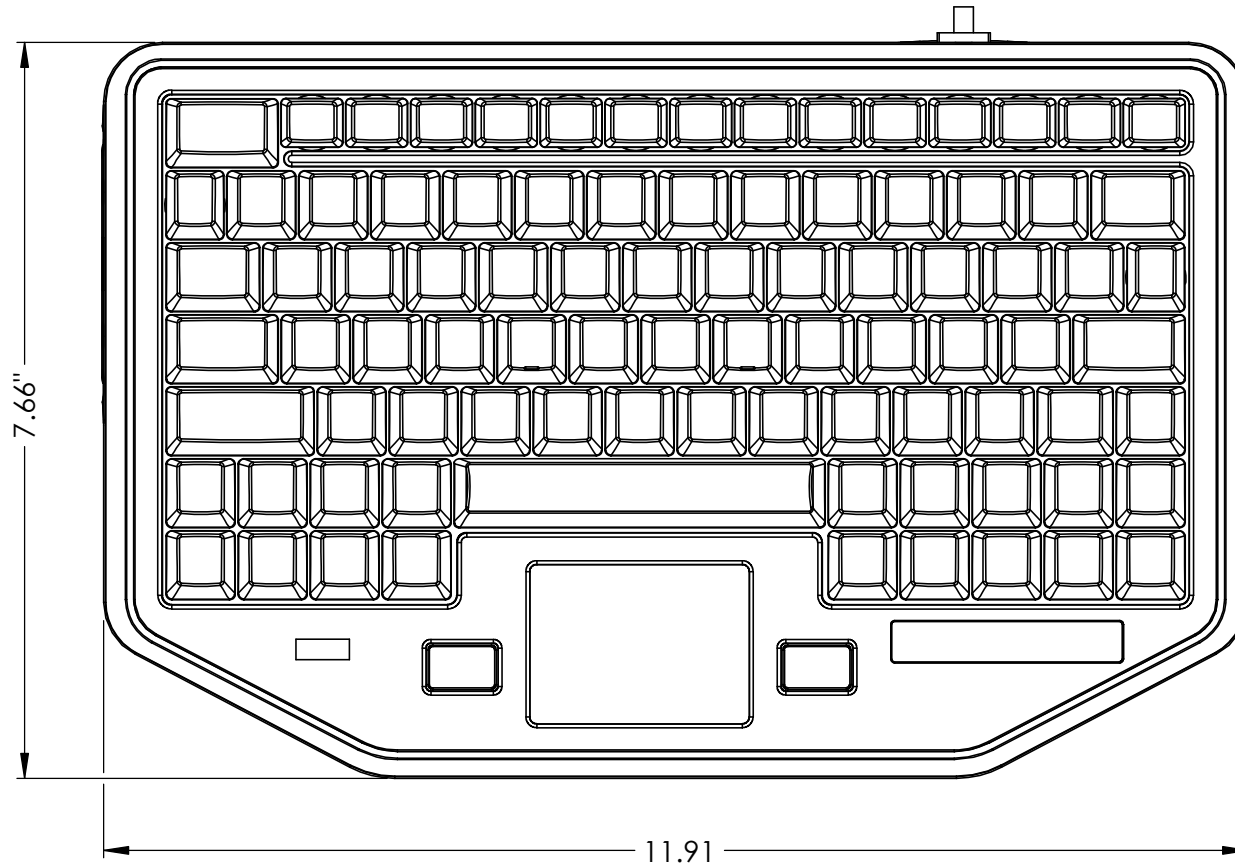

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.03 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

USB: 235mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +167°F (-40°C to +75°C)
 OPERATING: -4°F to +140°F (-20°C to +60°C)

HUMIDITY

100% Humidity Resistant

WEIGHT

2.0 lbs +/- 0.10 lbs (0.90 kg +/- 0.05 kg)

VIBRATION


POWER SPECTRAL DENSITY: 0.04g/HZ
 FREQUENCY RANGE: 20Hz - 2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each 3 axis

PROPRIETARY AND CONFIDENTIAL

IK-TR-911-TP MOUNTING

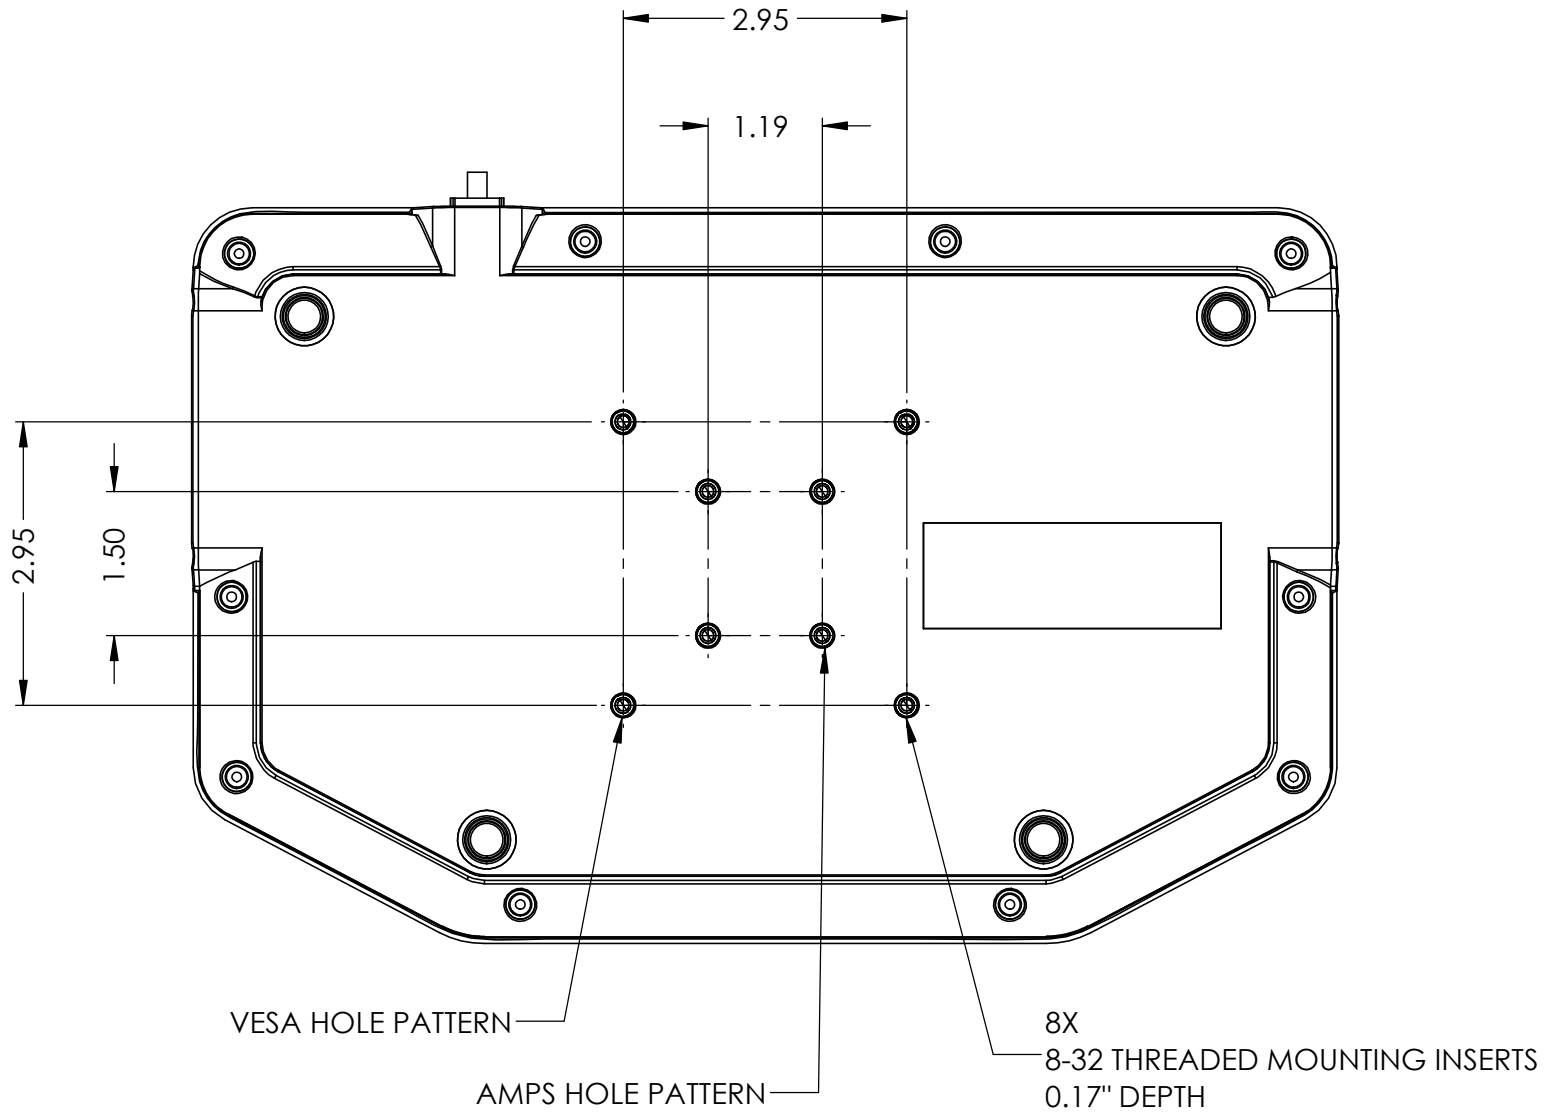

PROPRIETARY AND CONFIDENTIAL