
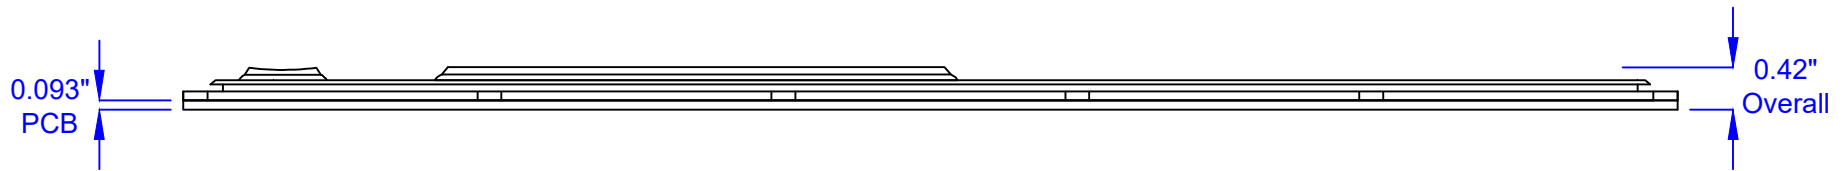


KYB-114-OEM

DATE	CHANGES	INTL	REV
07.29.08	Original	JB	1.0
12.30.19	Updated for MSP keypad	CW	1.1

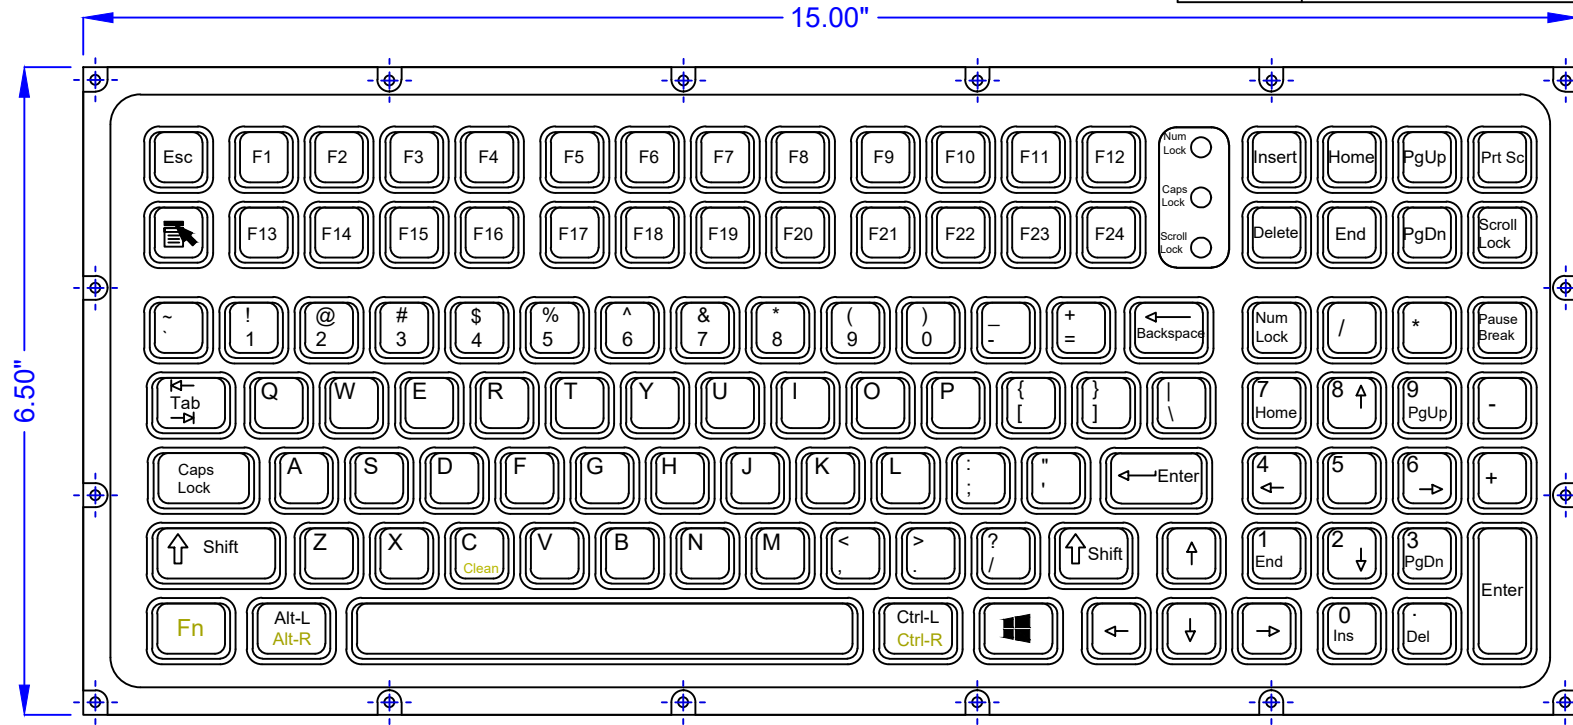

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.03 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

POWER

PS2: KEYBOARD: 50mA@5V (from Keyboard port)
 USB: 50mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant


SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

KYB-114-OEM MOUNTING

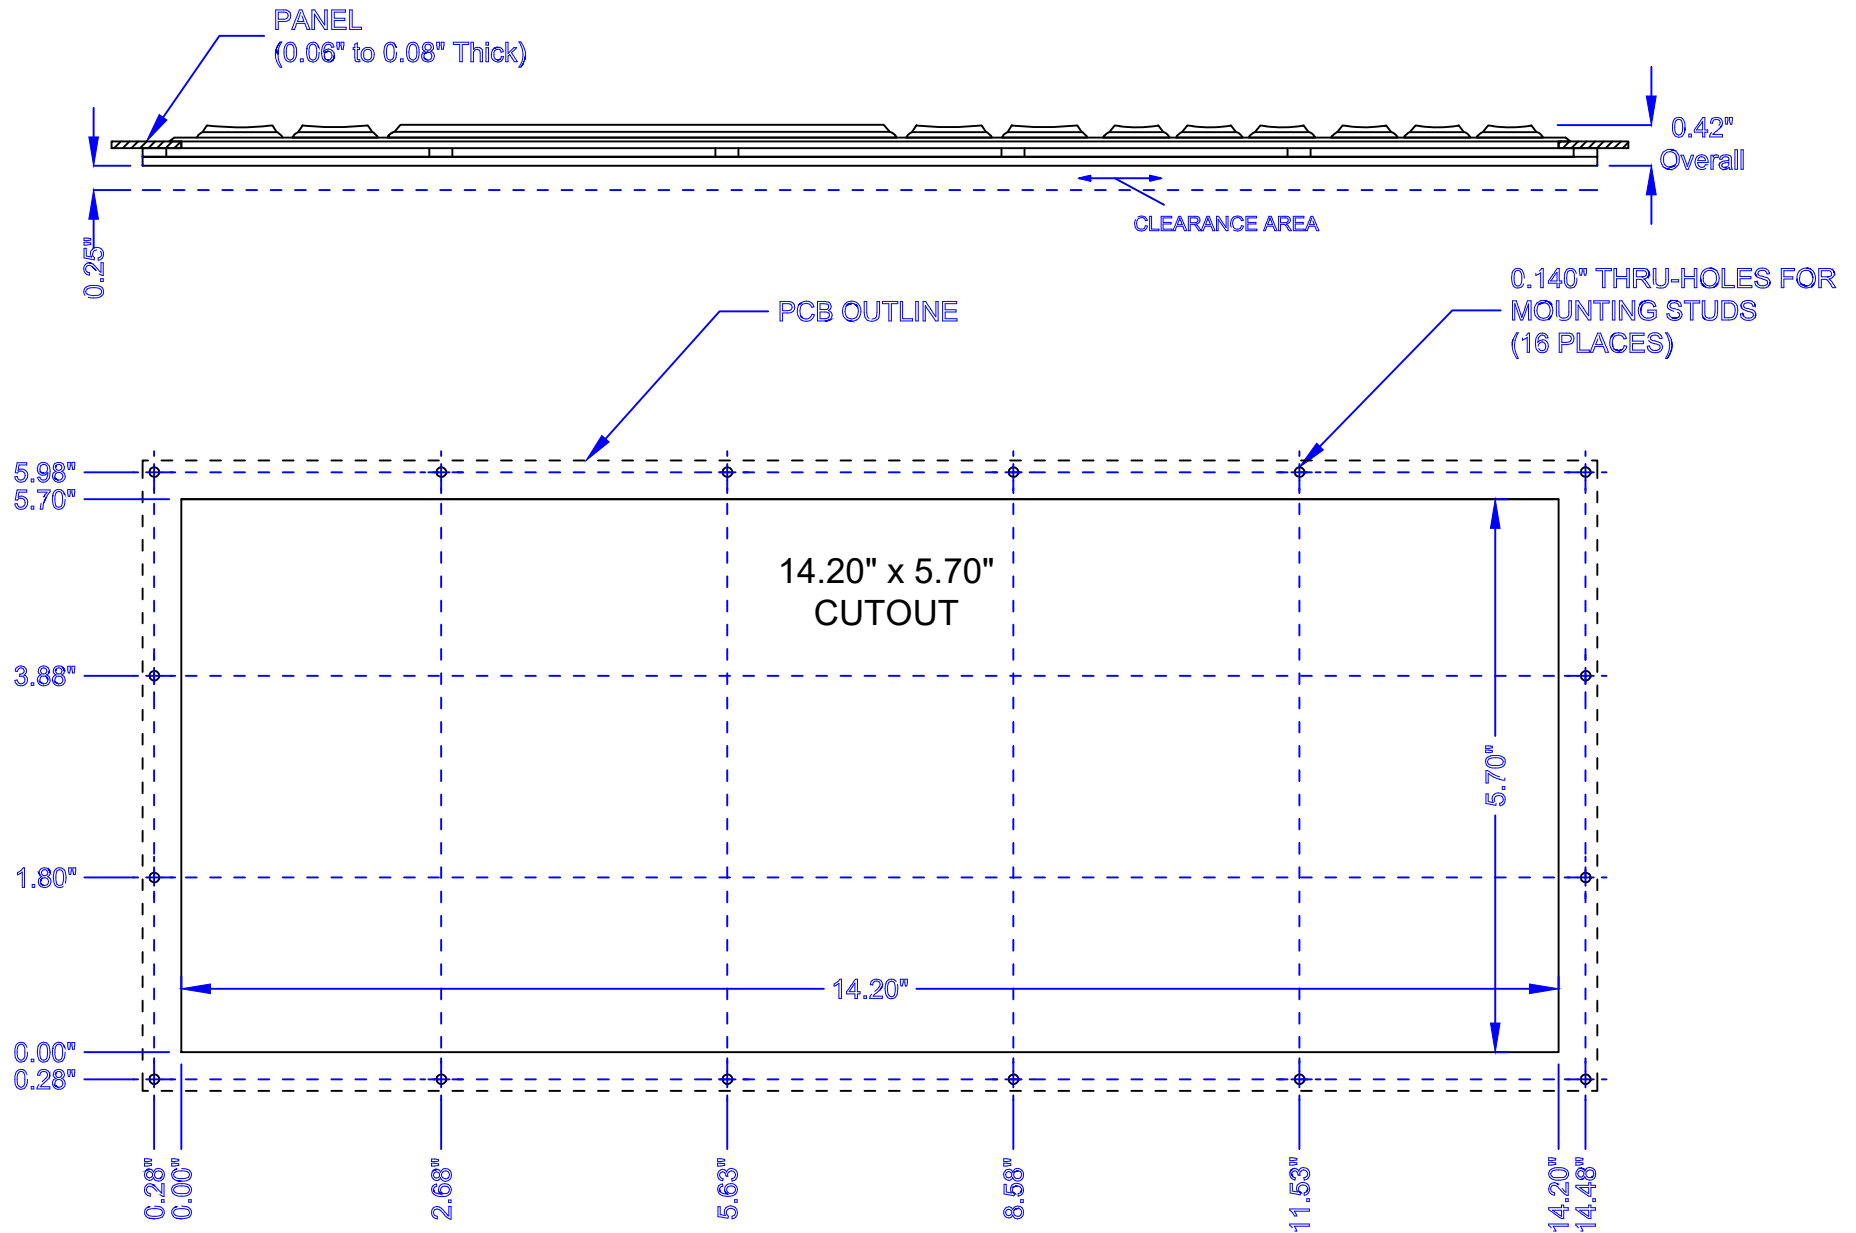

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2019 iKey, Ltd.

Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: KYB-114-OEM

Drawing Title: KYB-114-OEM

Drawing Number: MKT0133

Revision: 1.1

Sheet: 2 OF 2

Date: 12.30.19

CW