


PM-102-SS

DATE	CHANGES	INTL	REV
06.14.10	Original	JMW	1.0
11.12.10	Added sheet 2, and updated operating temperature	JMW	1.1

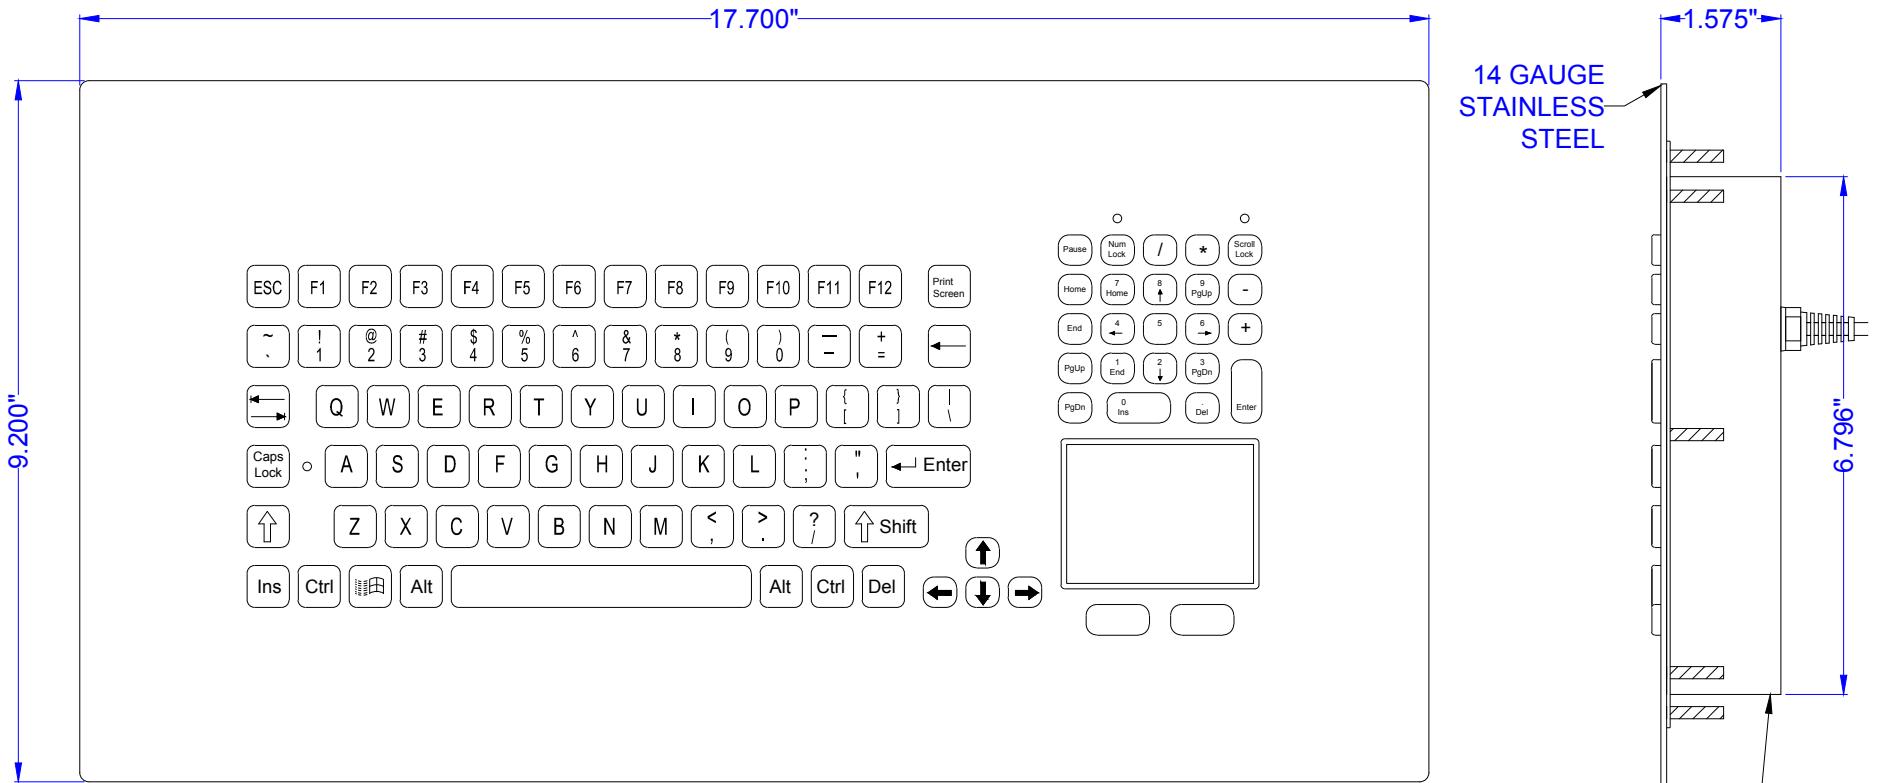

KEY SWITCH

MATERIAL: Brushed Stainless Steel
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.079 in.
 ACTUATION FORCE: 4.23 oz. +/- 0.18oz (120g +/- 5g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

PS2:
 KEYBOARD: 50mA@5V (from Keyboard port)
 POINTER: 10mA@5V (from Mouse port)
 USB: 60mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +149°F (-40°C to +65°C)
 OPERATING: -4°F to +140°F (-20°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT



5.00 lbs +/- 0.10 lbs (2.27 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2.5

iKey, Ltd. 2621 Ridgpoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 837-0283 Fax: (512) 927-8530	©2010 iKey, Ltd.	Part Number: PM-102-SS	Drawing Number: MKT0231	Sheet: 1 OF 1
		Drawing Title: PM-102-SS-MKT	Revision: 1.1	Date: 11.12.10

PM-102-SS BACK/MOUNTING

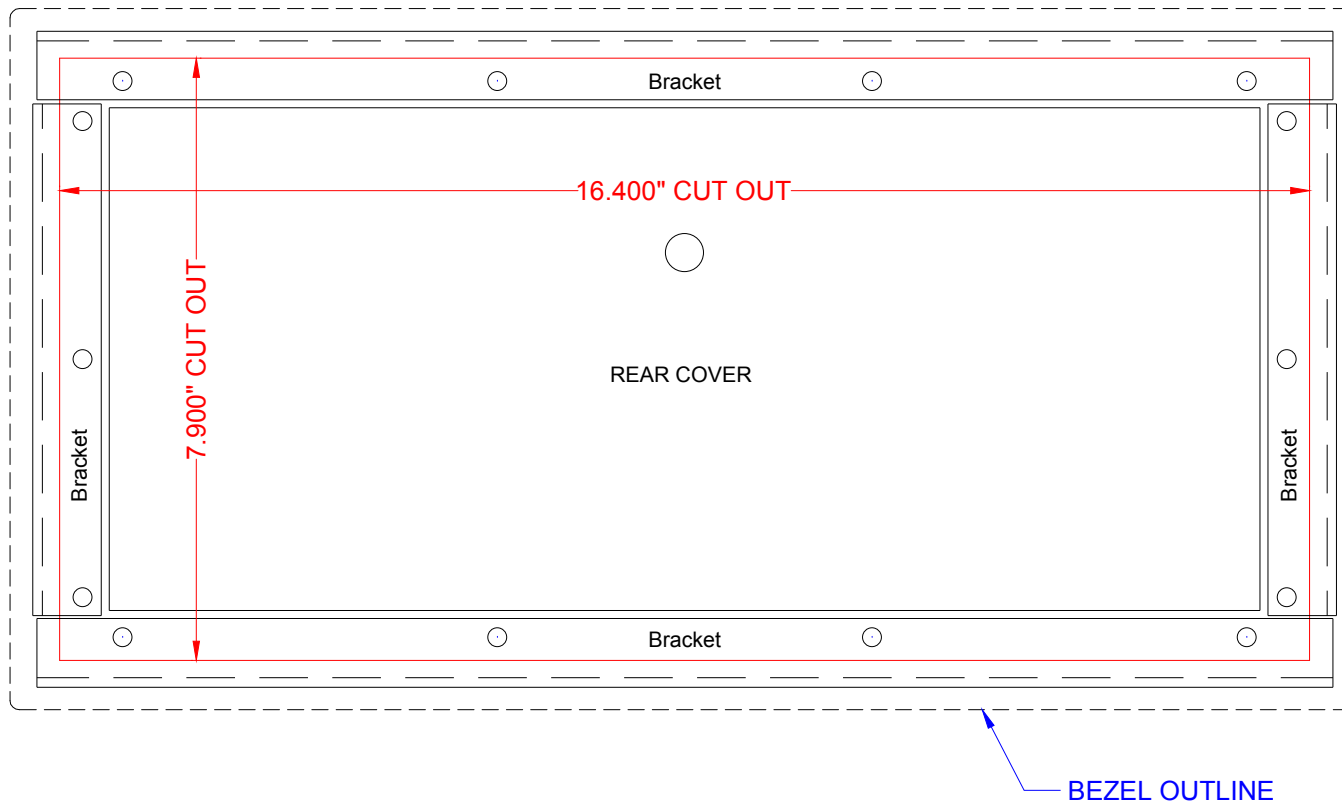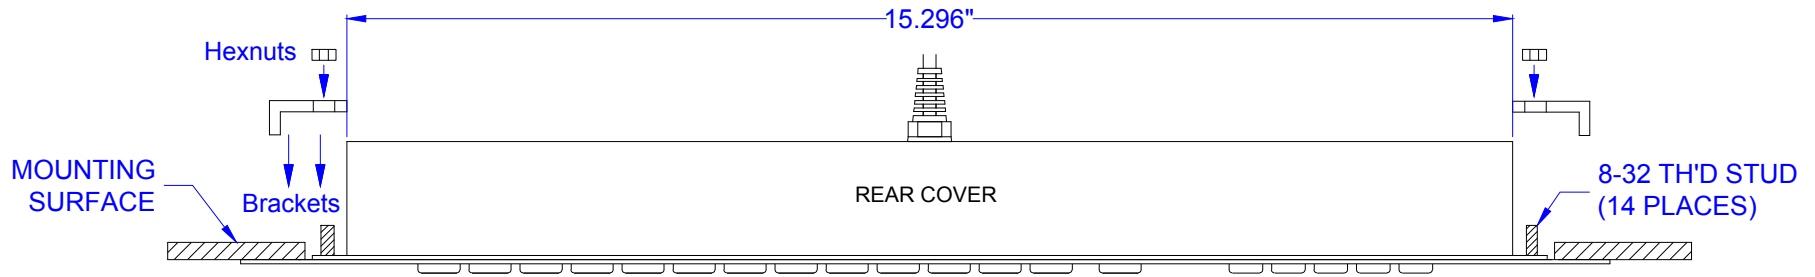

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2.5



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

Voice: (512) 837-0283
Fax: (512) 927-8530

©2010 iKey, Ltd.

Part Number: PM-102-SS

Drawing Number: MKT0231

Sheet: 2 OF 2

Drawing Title: PM-102-SS-MKT

Revision: 1.1

Date: 11.12.10

JMW