
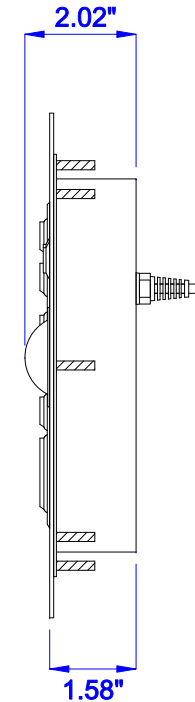


PM-2000-TB

DATE	CHANGES	INTL	REV
08.25.04	Original		1.00
01.02.09	Updated Format	JB	1.00

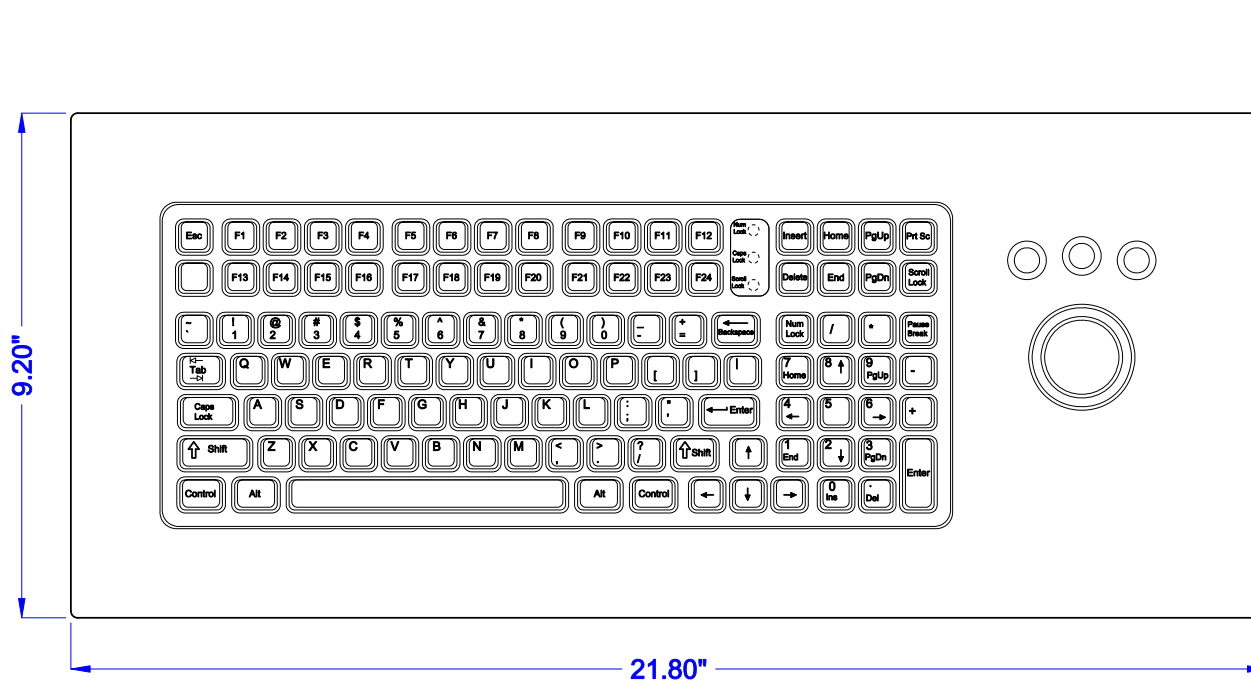

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.03 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

POWER

PS2:
KEYBOARD: 50mA@5V (from Keyboard port)
POINTER: 45mA@5V (from Mouse port)
USB: 95mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +185°F (-40°C to +85°C)
OPERATING: +32°F to +131°F (0°C to +55°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2KHz
DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

5.75 lbs +/- 0.10 lbs (2.61 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:3.5



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2008 iKey, Ltd.
 Voice: (512) 937-0283
 Fax: (512) 927-8630

Part Number: PM-2000-TB

Drawing Title: PM-2000-TB-MKT

Drawing Number: MKT0030



Revision: 1.00

Sheet: 1 OF 2

Date: 01.02.09

JWB

PM-2000-TB BACK / MOUNTING

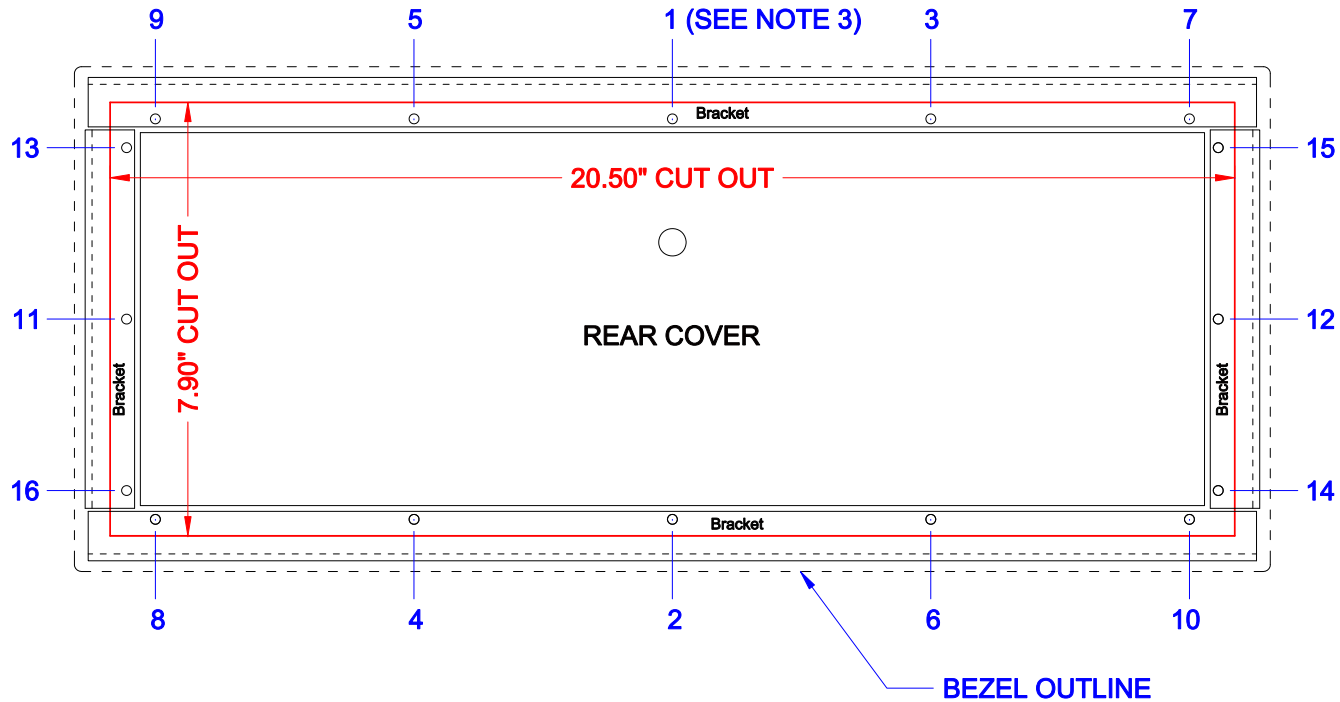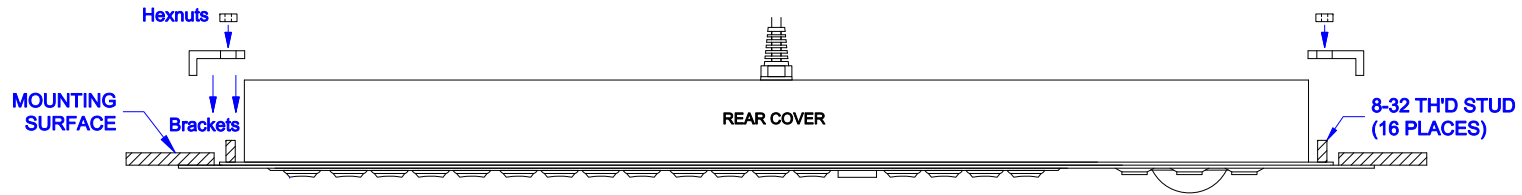

ENCLOSURE CASE: Stainless Steel

1. PLACE UNIT IN 7.9\"/>

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:3.5

iKey iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2008 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: PM-2000-TB

Drawing Title: PM-2000-TB-MKT

Drawing Number: MKT0030

Revision: 1.00

Sheet: 2 OF 2

Date: 01.02.09

JWB