


PM-97-TP

DATE	CHANGES	INTL	REV
06.03.09	Original	JB	1.0
01.05.11	Updated Temp Spec	JMW	1.1
01.24.11	Changed lineweights	TWH	1.2

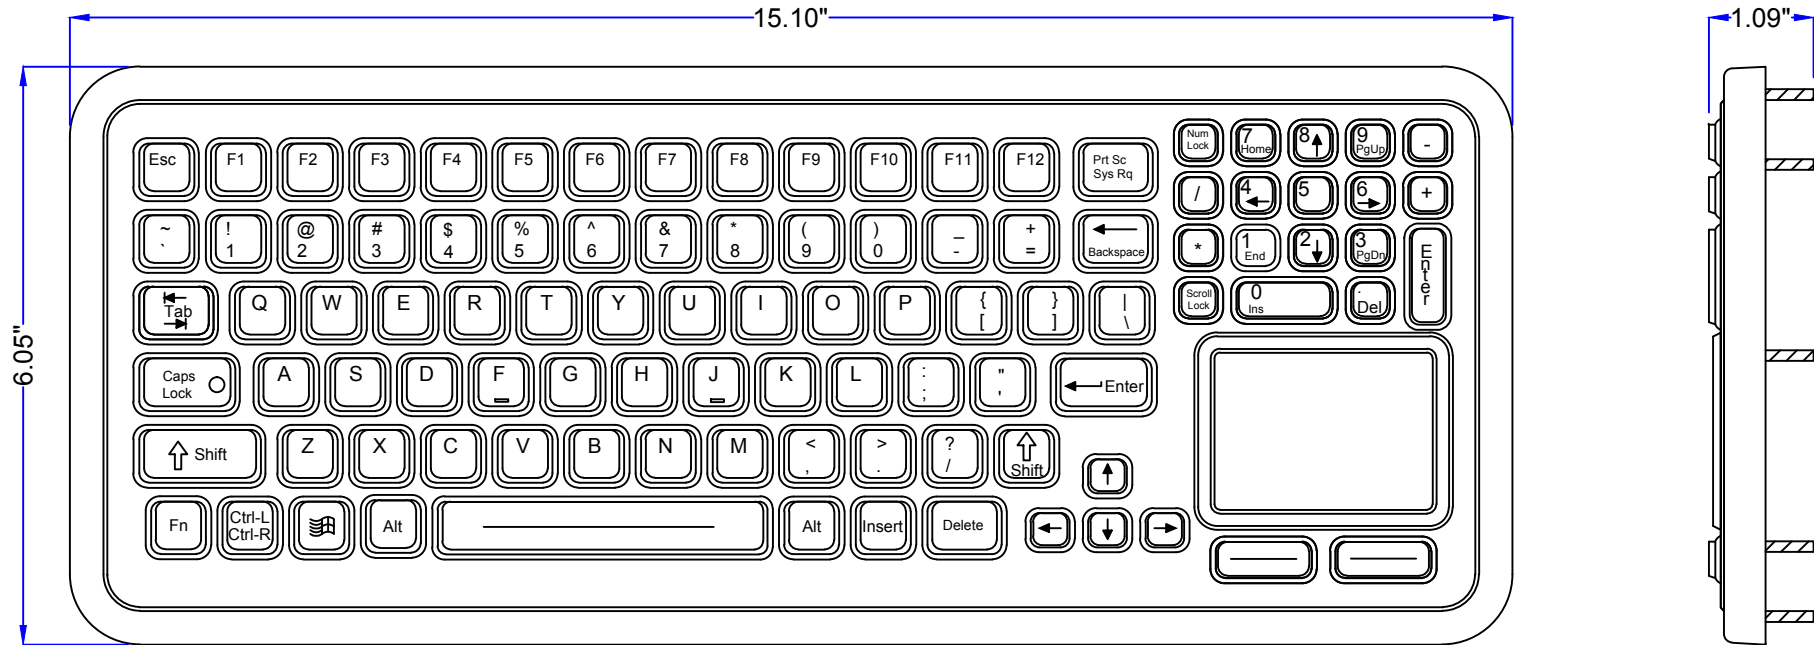

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

PS2:
 KEYBOARD: 50mA@5V (from Keyboard port)
 TOUCH PAD: 10mA@5V (from Mouse port)
 USB: 60mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axes

WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2011 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: PM-97-TP

Drawing Title: PM-97-TP-MKT

Drawing Number: MKT0199


Revision: 1.2

Sheet: 1 OF 2

Date: 01.24.11

TWH

PM-97-TP MOUNTING

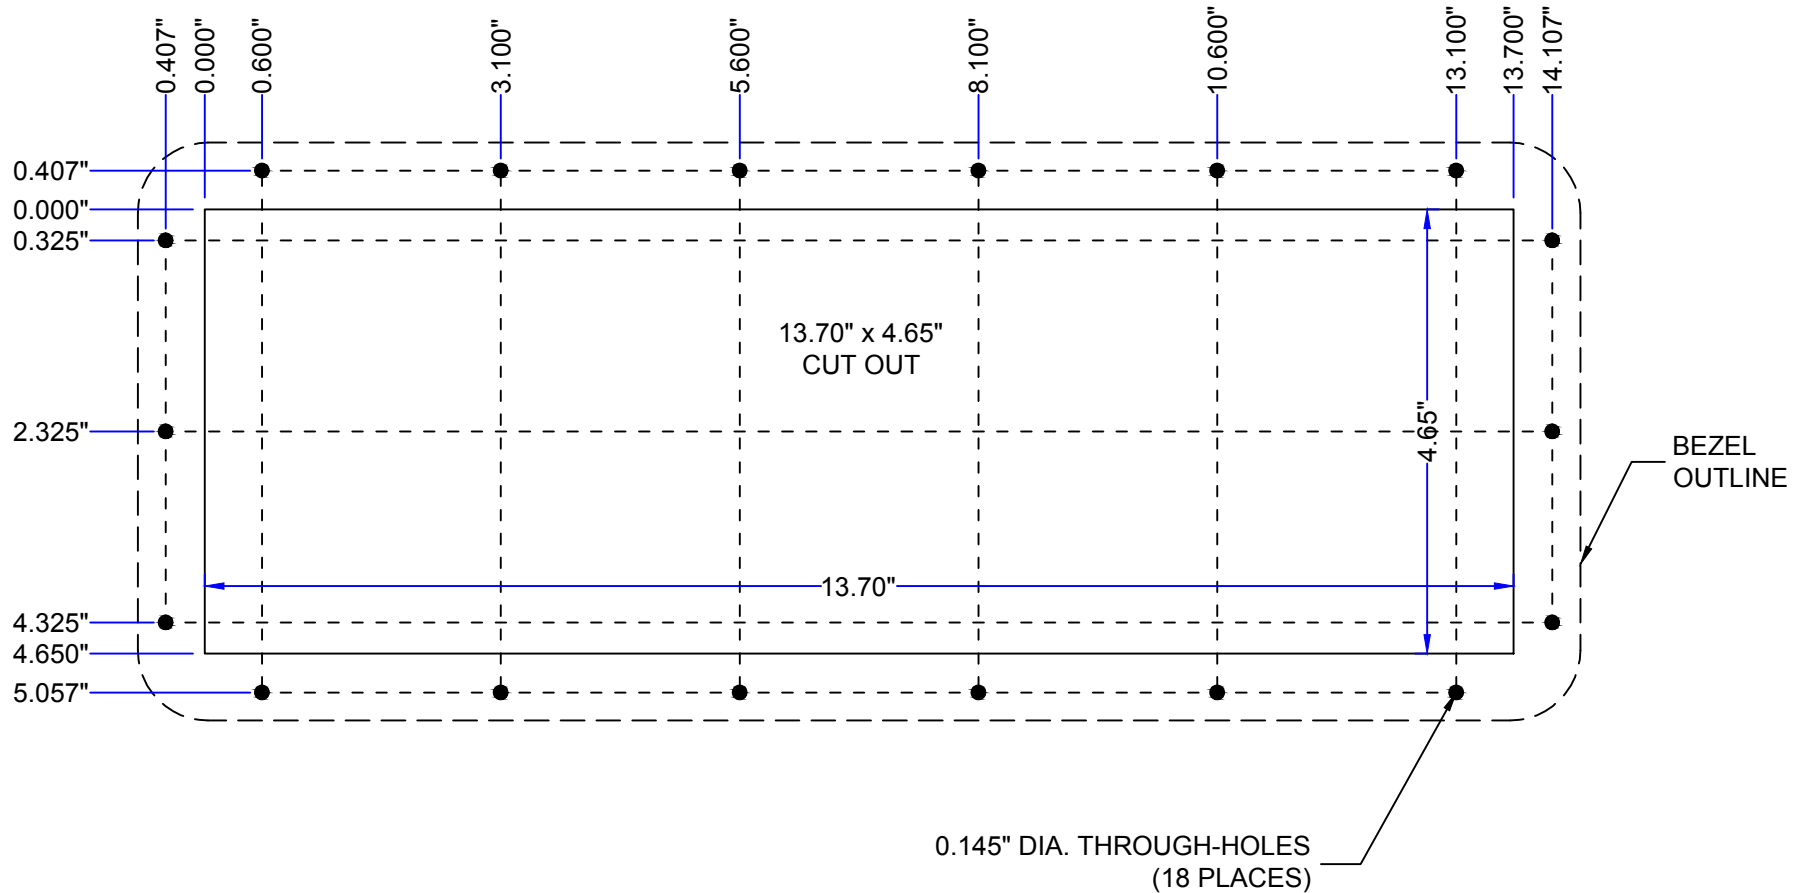

PM BEZEL: ABS/Polycarbonate with #4-40 x 0.50\" Metal Studs (18 Places)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2011 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: PM-97-TP
Drawing Title: PM-97-TP-MKT

Drawing Number: MKT0199
Revision: 1.2

Sheet: 2 OF 2
Date: 01.24.11
TWH