


# SK-102-FSR-M

DATE	CHANGES	INTL	REV
08.13.10	Original	JMW	1.00

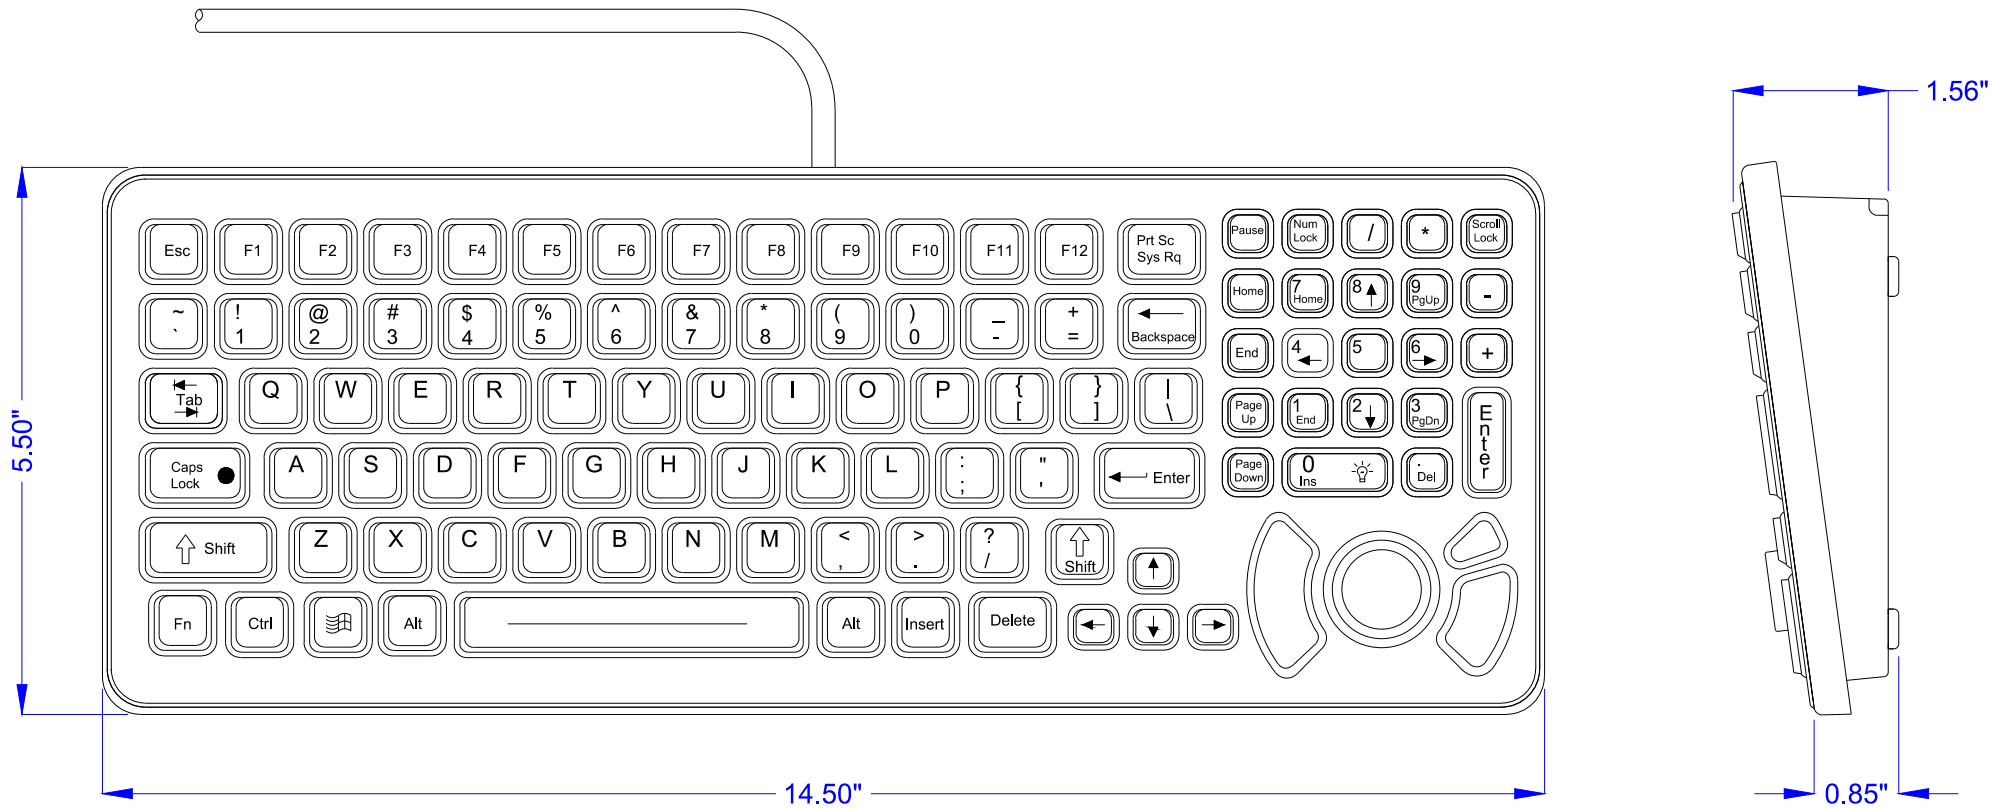

## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

## TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)  
 OPERATING: -40°F to +158°F (-40°C to +70°C)

## VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## POWER

PS2:  
 KEYBOARD: 50mA@5V (from Keyboard port)  
 POINTER: 35mA@5V (from Mouse port)  
 USB: 85mA@5V (from CPU port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis


## WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

# SK-102-FSR-M BACK/MOUNTING

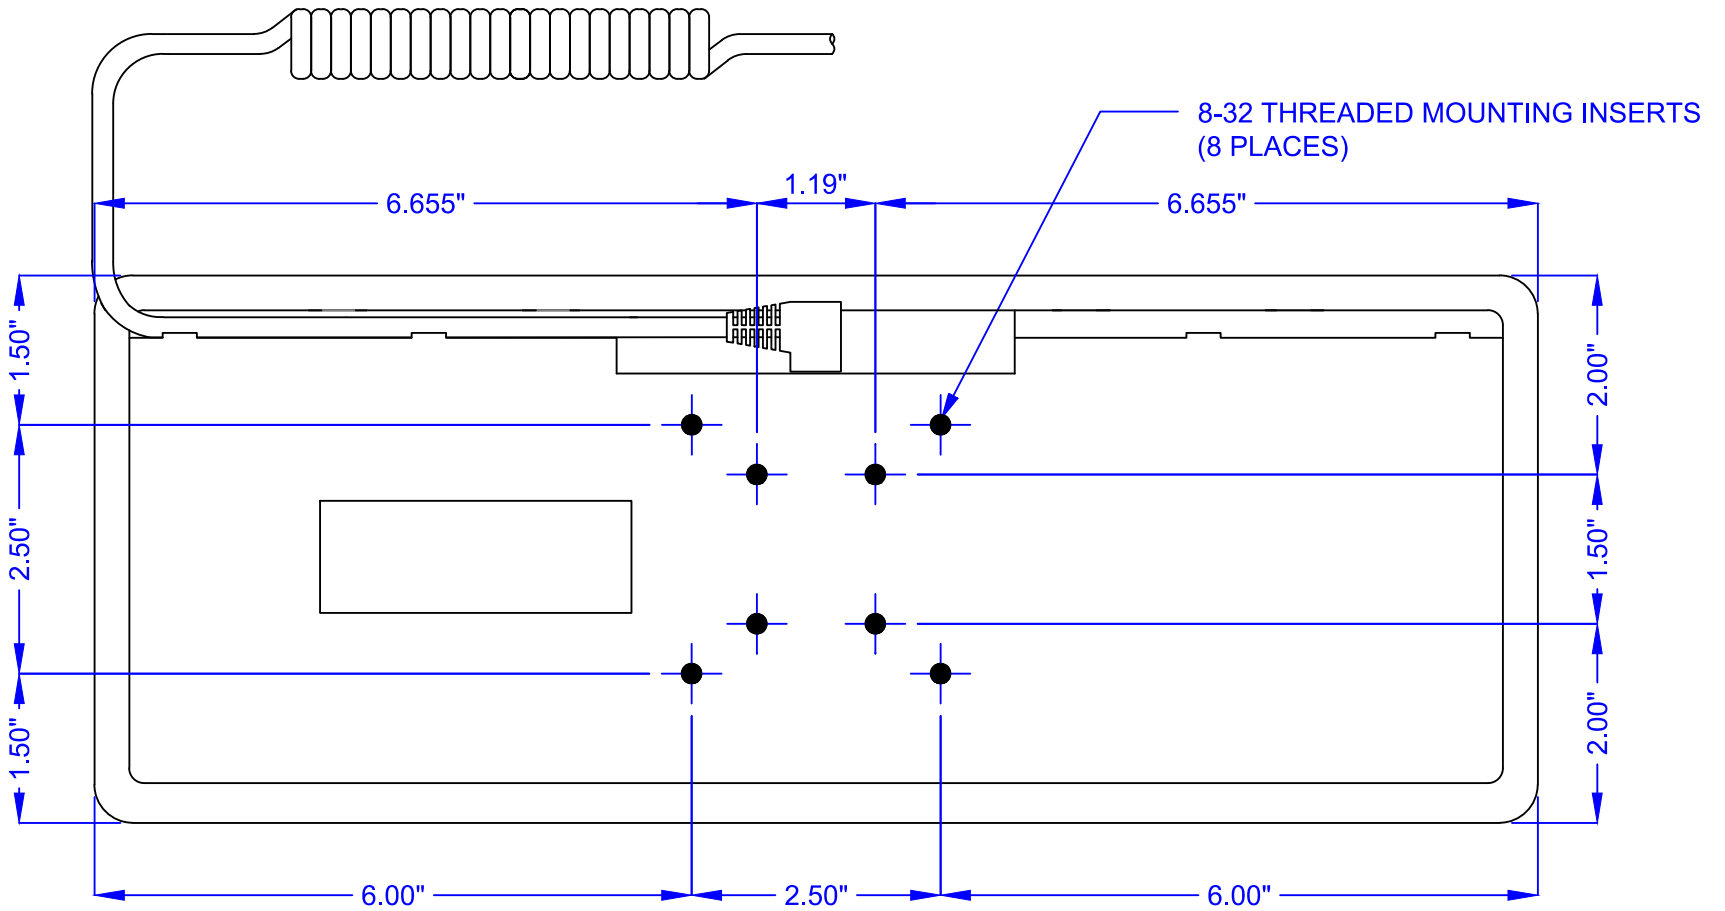

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
2621 Ridgpoint Dr. Suite 235  
Austin, Texas 78754

©2010 iKey, Ltd.  
Voice: (512) 837-0283  
Fax: (512) 927-8530

Part Number: SK-102-FSR-M

Drawing Title: SK-102-FSR-M-MKT

Drawing Number: MKT0238

Revision: 1.00

Sheet: 2 OF 2

Date: 08.13.10

JMW