


SK-102-TP

DATE	CHANGES	INTL	REV
08.12.09	Original	JB	1.0

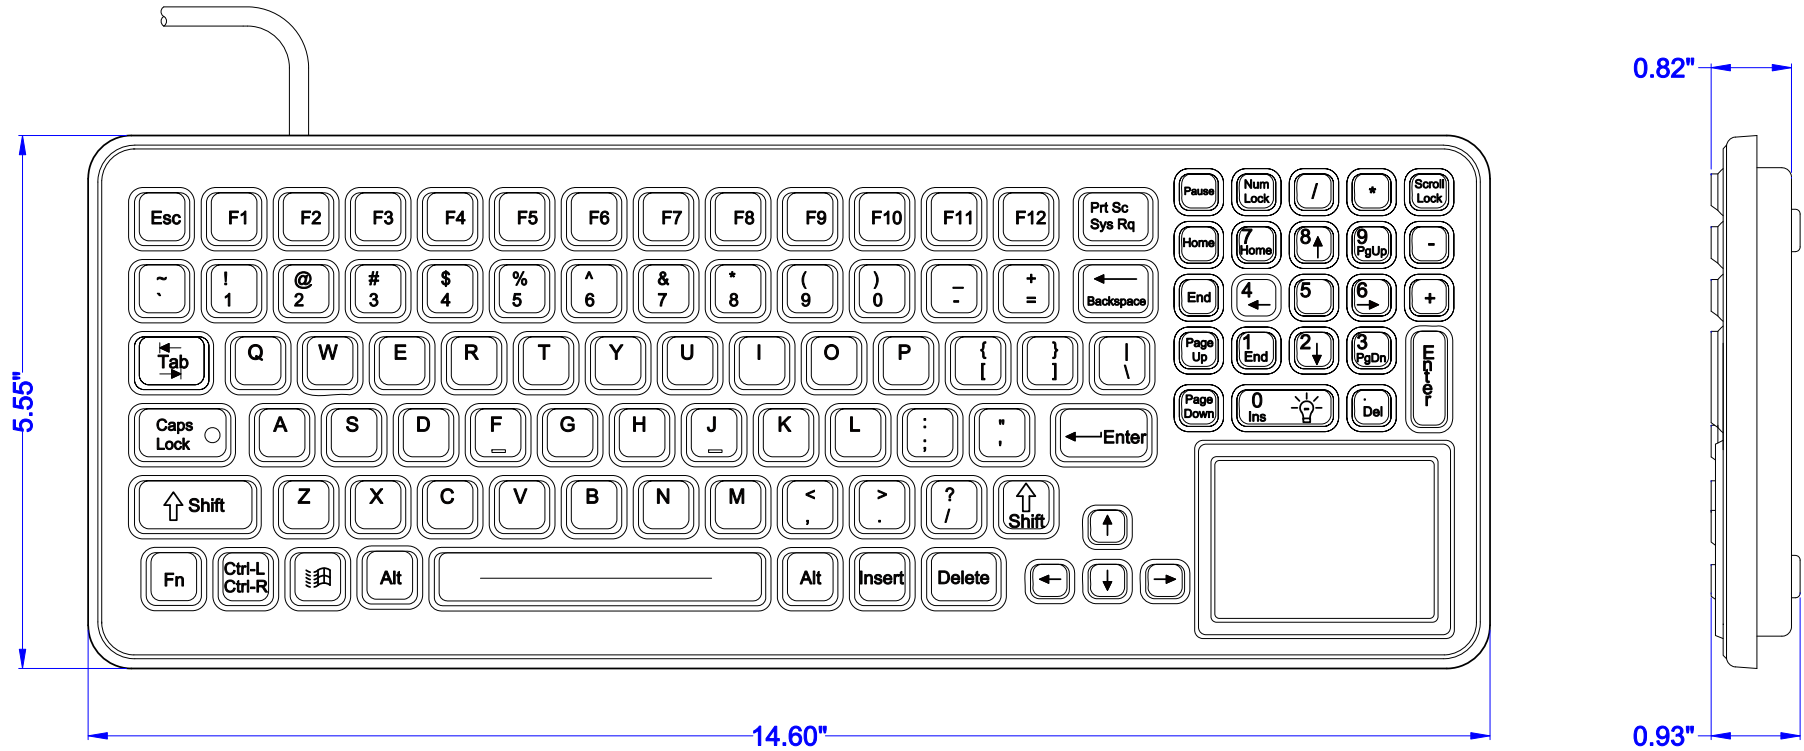

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

POWER

PS2:
KEYBOARD: 50mA@5V (from Keyboard port)
TOUCHPAD: 10mA@5V (from Mouse port)
USB: 60mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +149°F (-40°C to +65°C)
OPERATING: +32°F to +140°F (0°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2008 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8630

Part Number: SK-102-TP

Drawing Title: SK-102-TP-MKT

Drawing Number: MKT0211

Revision: 1.0

Sheet: 1 OF 1

Date: 08.12.09

JWB