


# SK-97-TP-M

| DATE     | CHANGES               | INTL | REV |
|----------|-----------------------|------|-----|
| 02.02.12 | Original              | TH   | 1.0 |
| 04.02.25 | Updated VESA Mounting | ADD  | 1.1 |

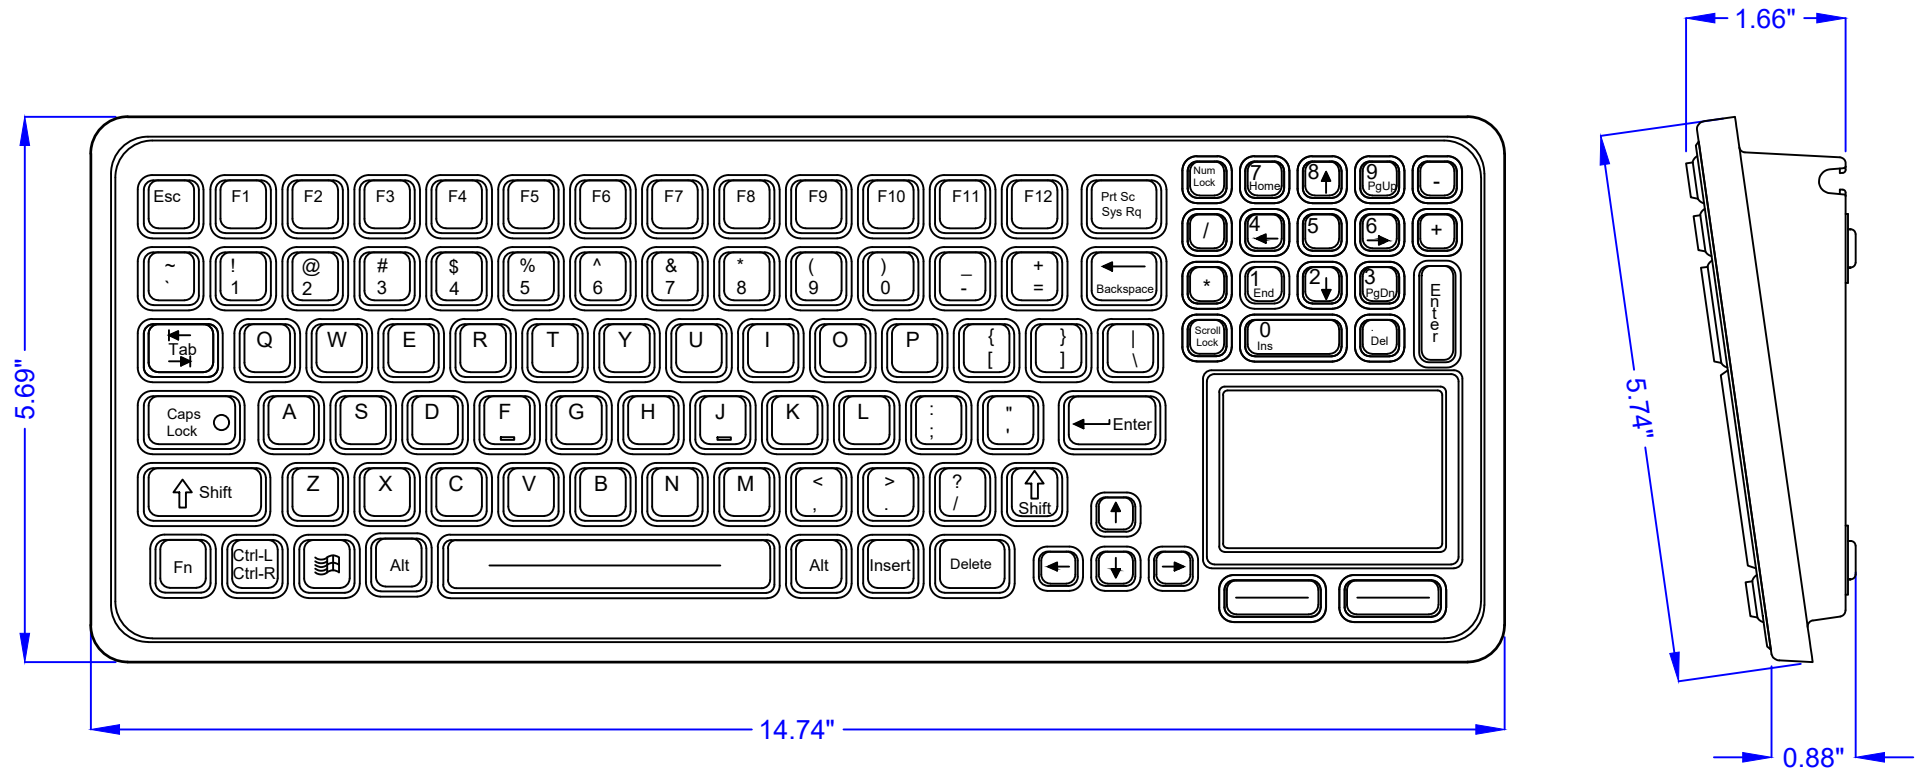

## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

## TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)  
 OPERATING: -40°F to +158°F (-40°C to +70°C)

## VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## POWER

PS2: KEYBOARD: 50mA@5V (from Keyboard port)  
 TOUCH PAD: 10mA@5V (from Mouse port)  
 USB: 60mA@5V (from CPU port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

## WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
 2621 Ridgepoint Dr. Suite 235  
 Austin, Texas 78754  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

©2025 iKey, Ltd.

Part Number: SK-97-TP-M

Drawing Title: SK-97-TP-M-MKT


Drawing Number: MKT0313

Revision: 1.1

Sheet: 1 OF 2

Date: 04.02.25 ADD

SK-97-TP-M BACK/MOUNTING

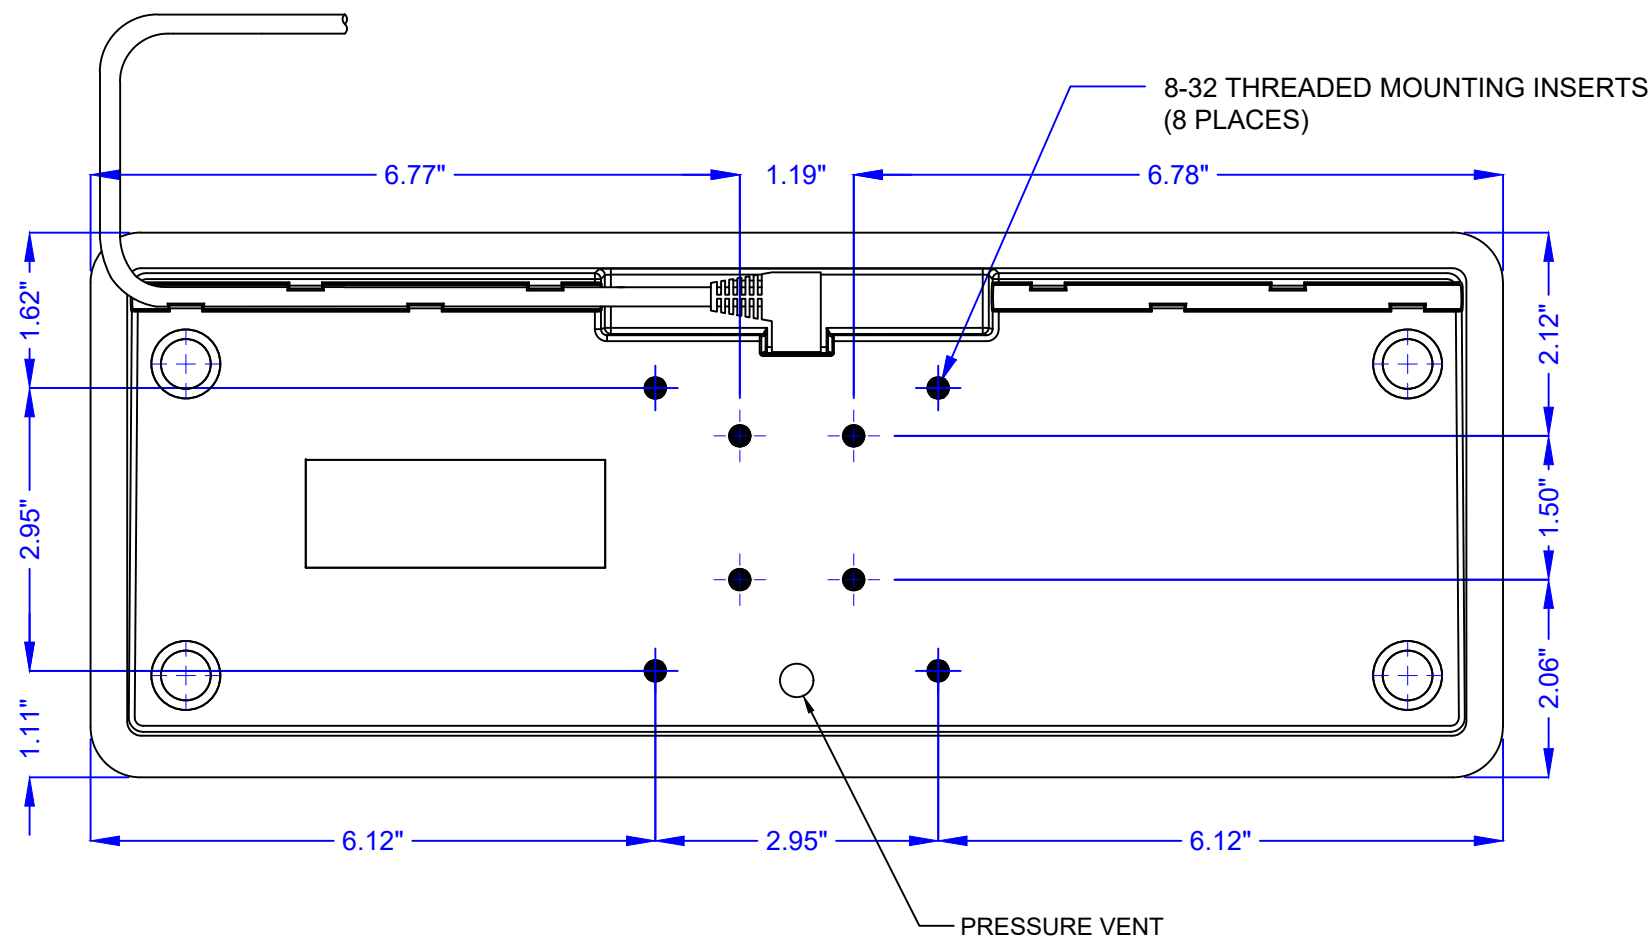

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2