


# SL-81-OEM

DATE	CHANGES	INTL	REV
08.13.08	Original	JB	1.00

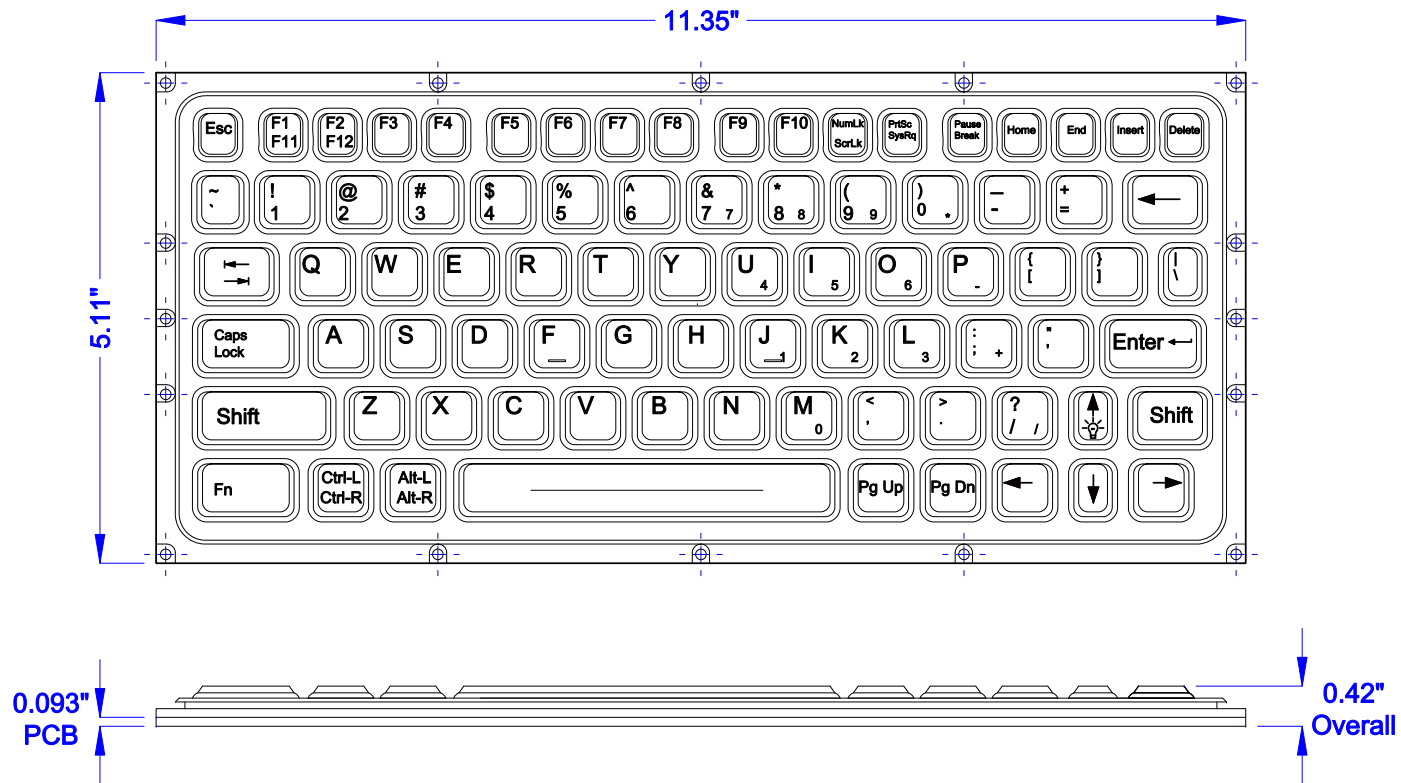

## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 6.35 oz. +/- 1.06oz (180g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

## TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)  
 OPERATING: -40°F to +158°F (-40°C to +70°C)

## VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## POWER

PS2: KEYBOARD: 200mA@5V (from Keyboard port)  
 USB: 200mA@5V (from CPU port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis



## WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

# SL-81-OEM MOUNTING

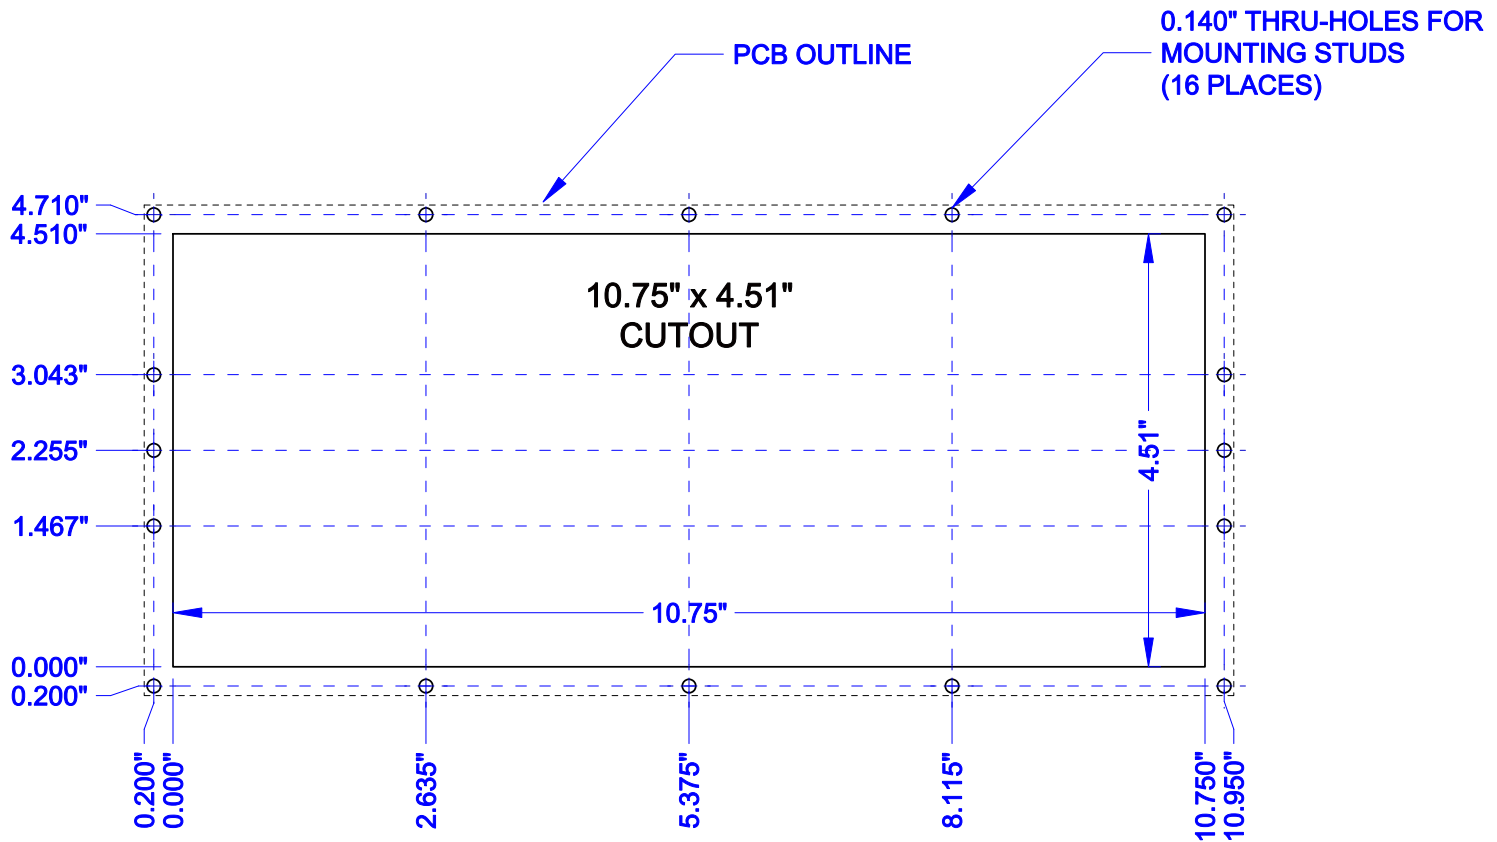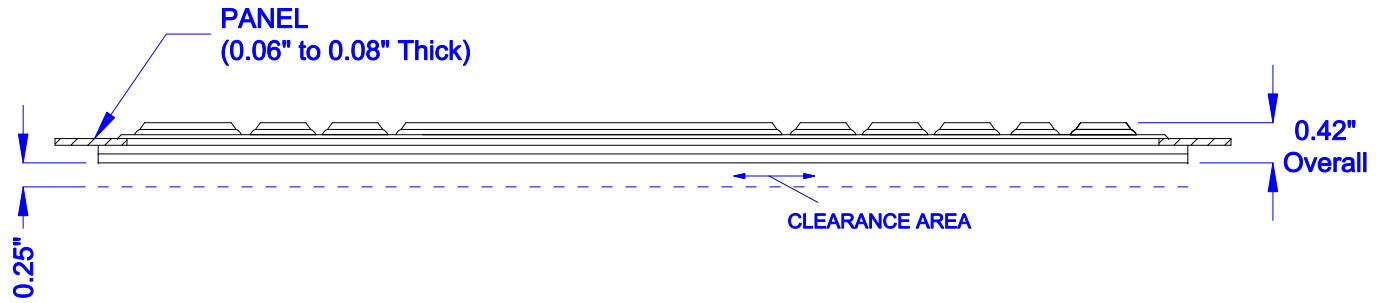

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

**iKey** iKey, Ltd.  
2621 Ridgpoint Dr. Suite 235  
Austin, Texas 78754

©2008 iKey, Ltd.  
Voice: (512) 897-0283  
Fax: (512) 927-8830

Part Number: SL-81-OEM  
Drawing Title: SL-81-OEM

Drawing Number: MKT0136  
Revision: 1.00

Sheet: 2 OF 2  
Date: 08.13.08  
JWB