


SL-86-911-FSR

DATE	CHANGES	INTL	REV
02.13.15	Original	SCC	1.0
03.19.25	Updated VESA mounting and added iKey logo	ADD	1.1

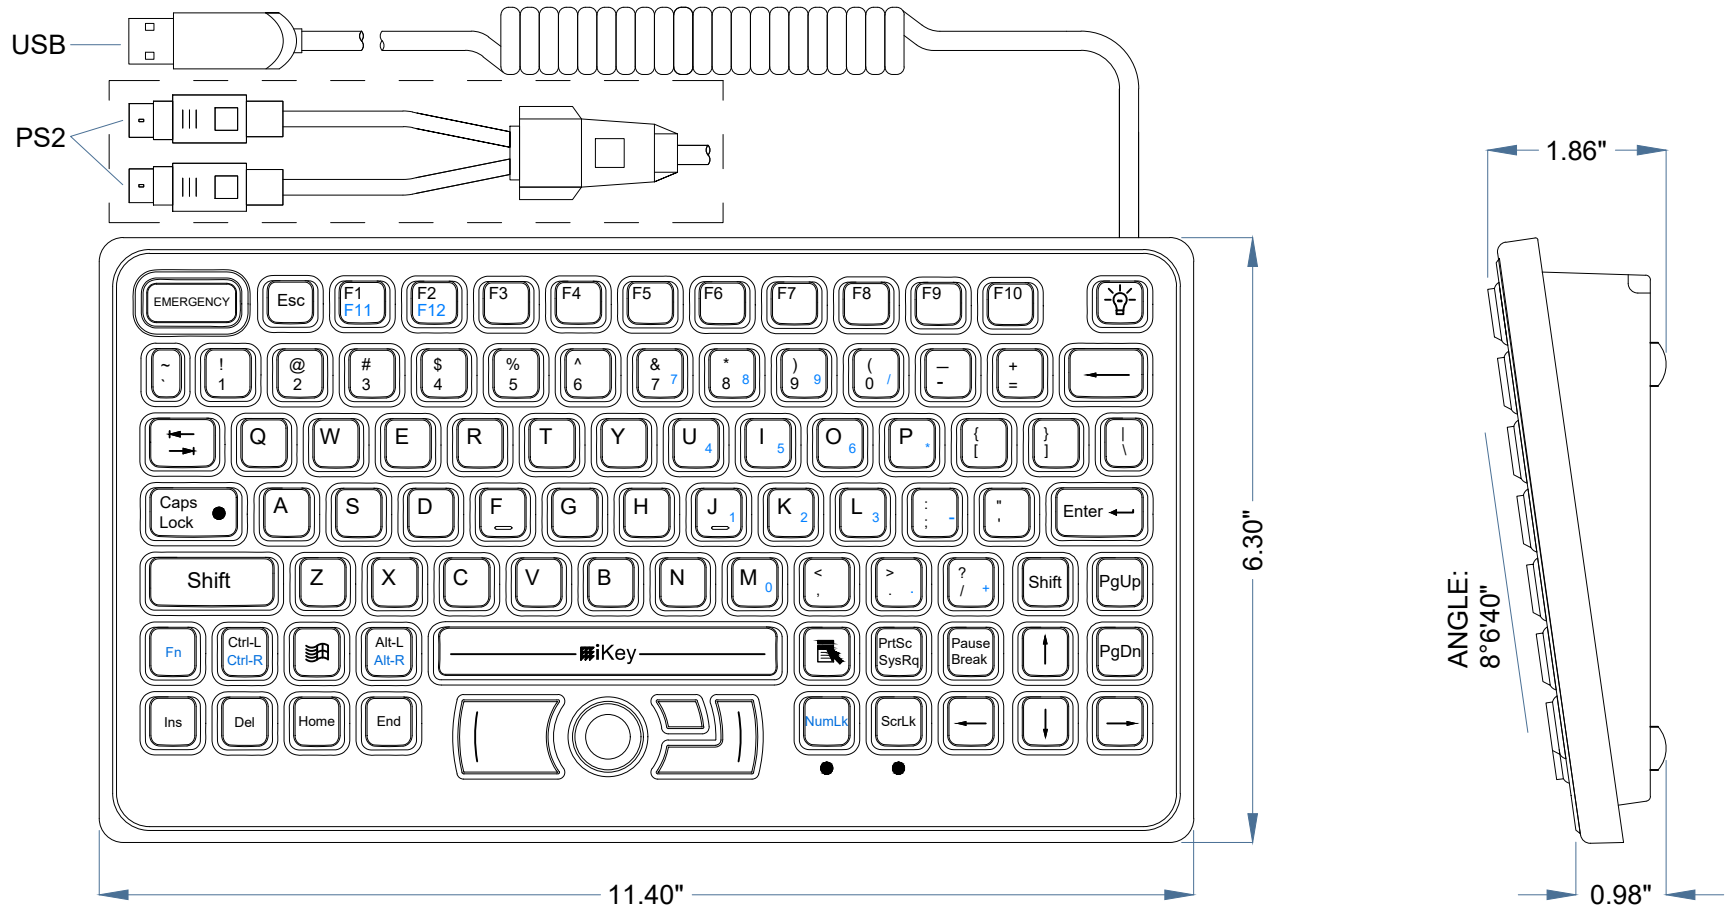

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06 oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)
 OPERATING: -4°F to +140°F (-20°C to +60°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

POWER

PS2: KEYBOARD: 215mA@5V (from Keyboard port)
 POINTER: 10mA@5V (from Mouse port)
 USB: 215mA@5V (from USB port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgepoint Dr. Suite 235
 Austin, Texas 78754

©2025 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: SL-86-911-FSR

Drawing Title: SL-86-911-FSR-MKT

Drawing Number: MKT9872


Revision: 1.1

Sheet: 1 OF 2

Date: 03.19.25

ADD

SL-86-911-FSR BACK/MOUNTING

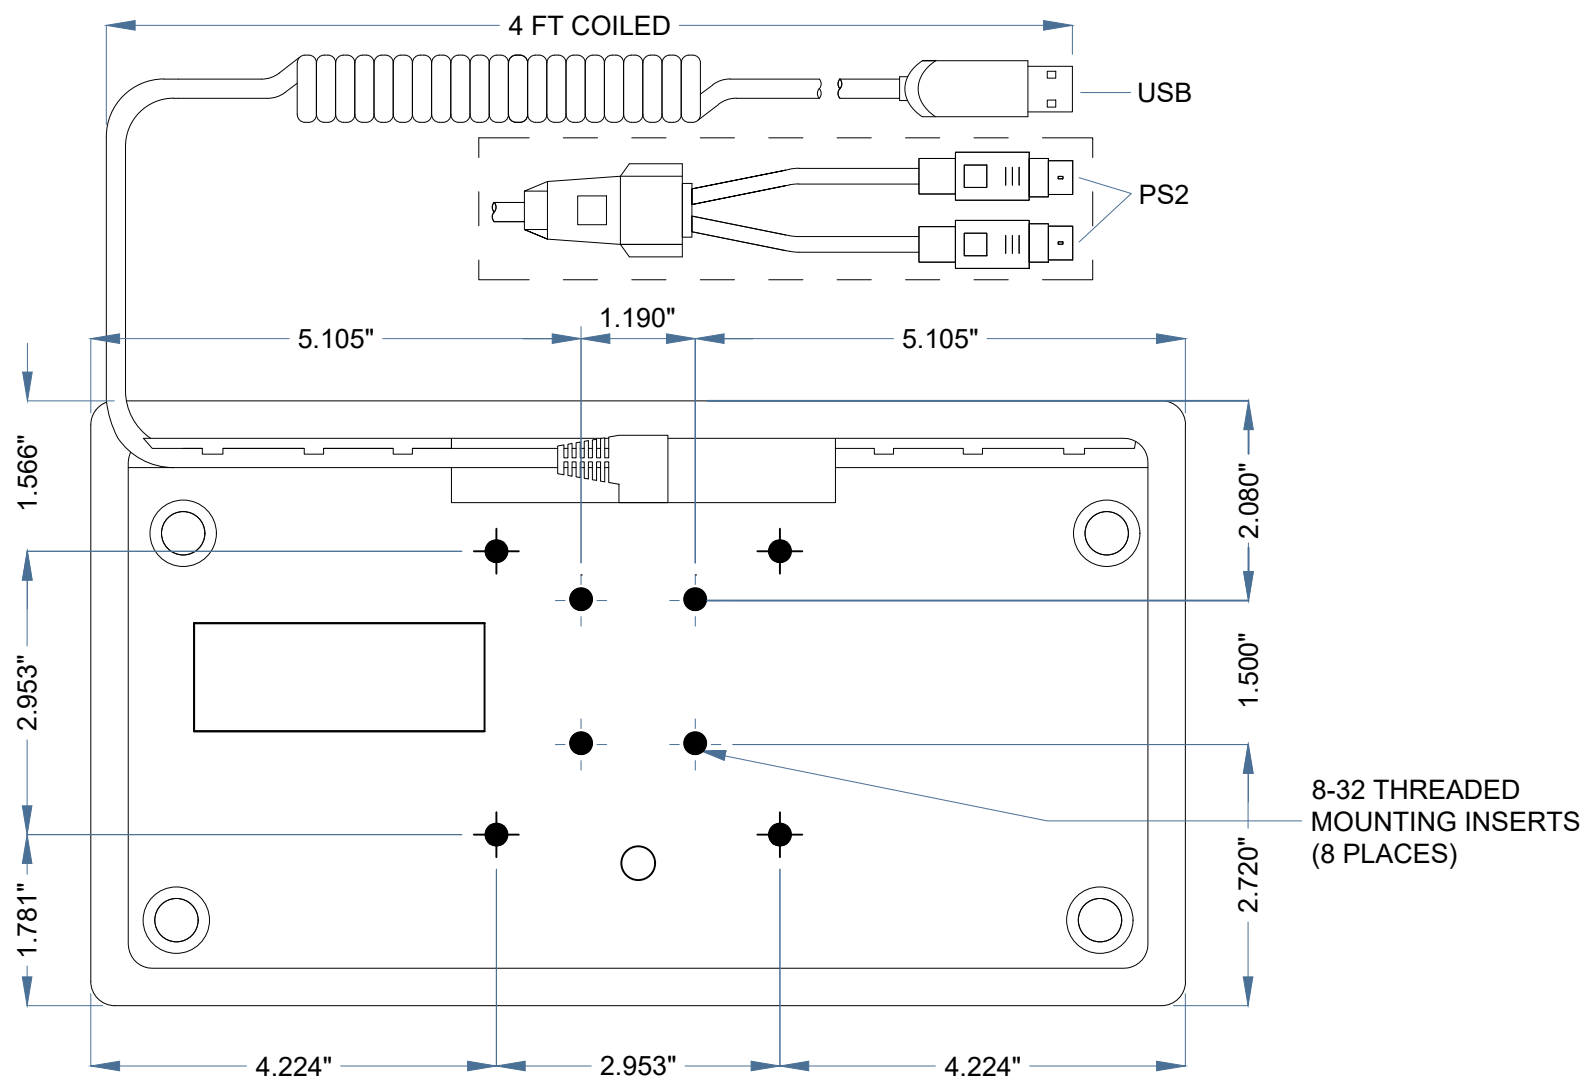

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2