


# SL-86-911-TP

| DATE     | CHANGES                           | INTL | REV |
|----------|-----------------------------------|------|-----|
| 02.21.07 | Original                          |      | 1.0 |
| 06.12.09 | Updated Format and Drawing Number | JB   | 2.0 |
| 01.05.11 | Updated Temp Spec                 | JMW  | 2.1 |
| 01.24.11 | Changed lineweights               | TWH  | 2.2 |
| 03.21.25 | Updated mounting to VESA pattern  | ADD  | 2.3 |

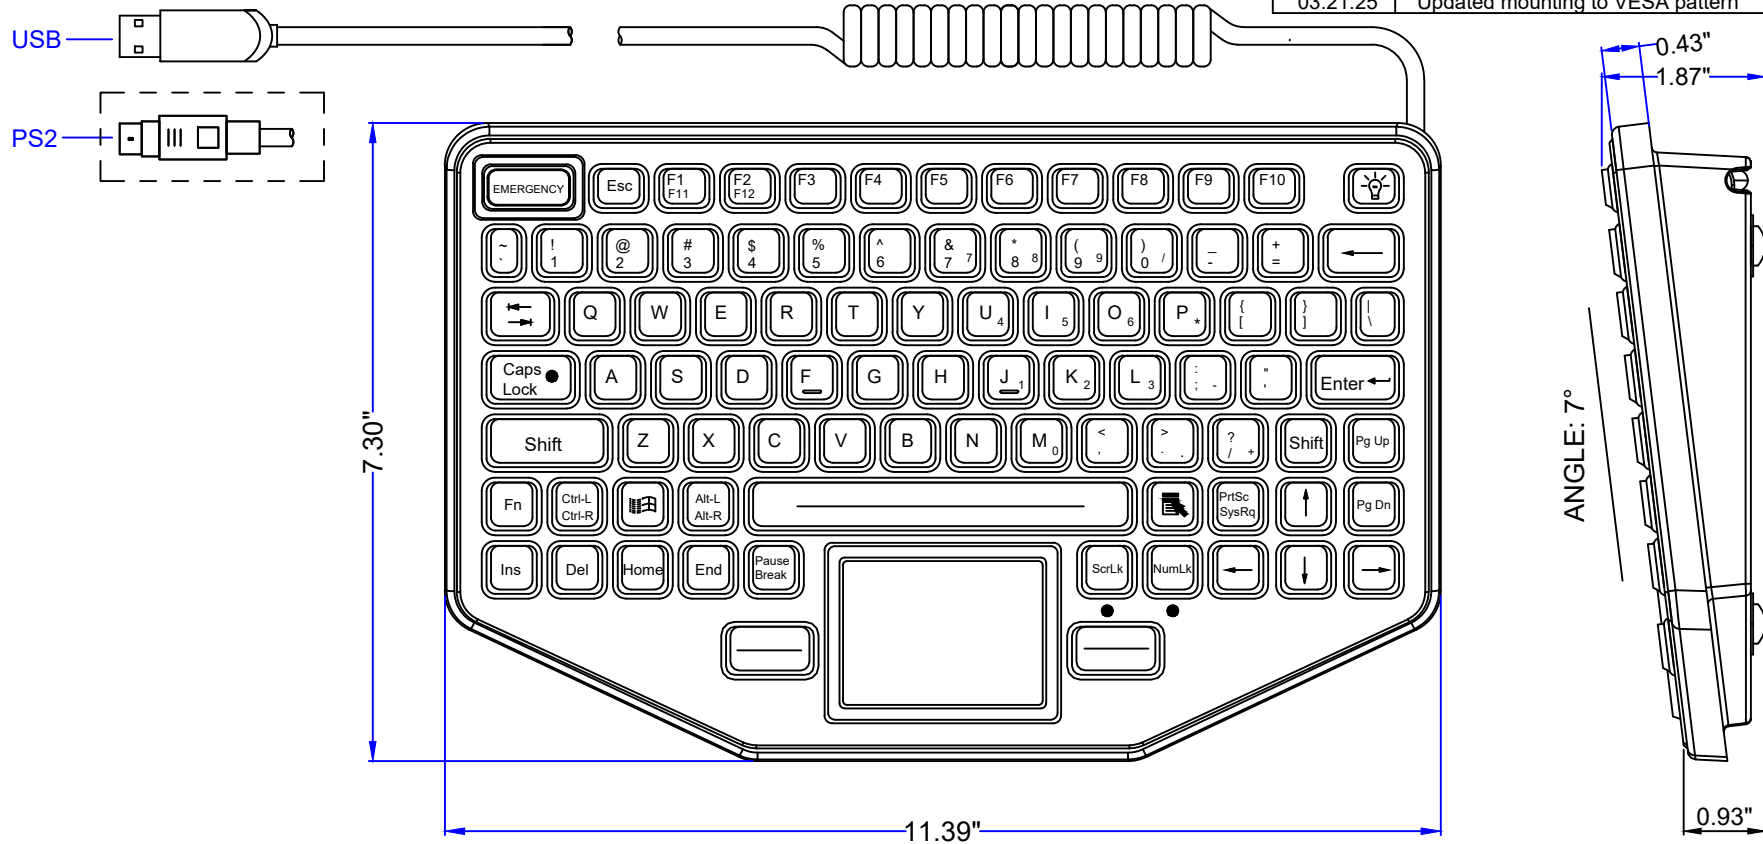

## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

## TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)  
 OPERATING: -40°F to +158°F (-40°C to +70°C)

## VIBRATION

POWER SPECTRAL DENSITY: .04g<sup>2</sup>/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## POWER

PS2:  
 KEYBOARD: 200mA@5V (from Keyboard port)  
 TOUCH PAD: 10mA@5V (from Mouse port)  
 USB: 210mA@5V (from CPU port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axes

## WEIGHT

2.25 lbs +/- 0.10 lbs (1.02 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2.25



iKey, Ltd.  
 2621 Ridgpoint Dr. Suite 235  
 Austin, Texas 78754

©2025 iKey, Ltd.  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

Part Number: SL-86-911-TP

Drawing Title: SL-86-911-TP-MKT

Drawing Number: MKT0200


Revision: 2.3

Sheet: 1 OF 2

Date: 03.21.25

ADD

SL-86-911-TP BACK / MOUNTING

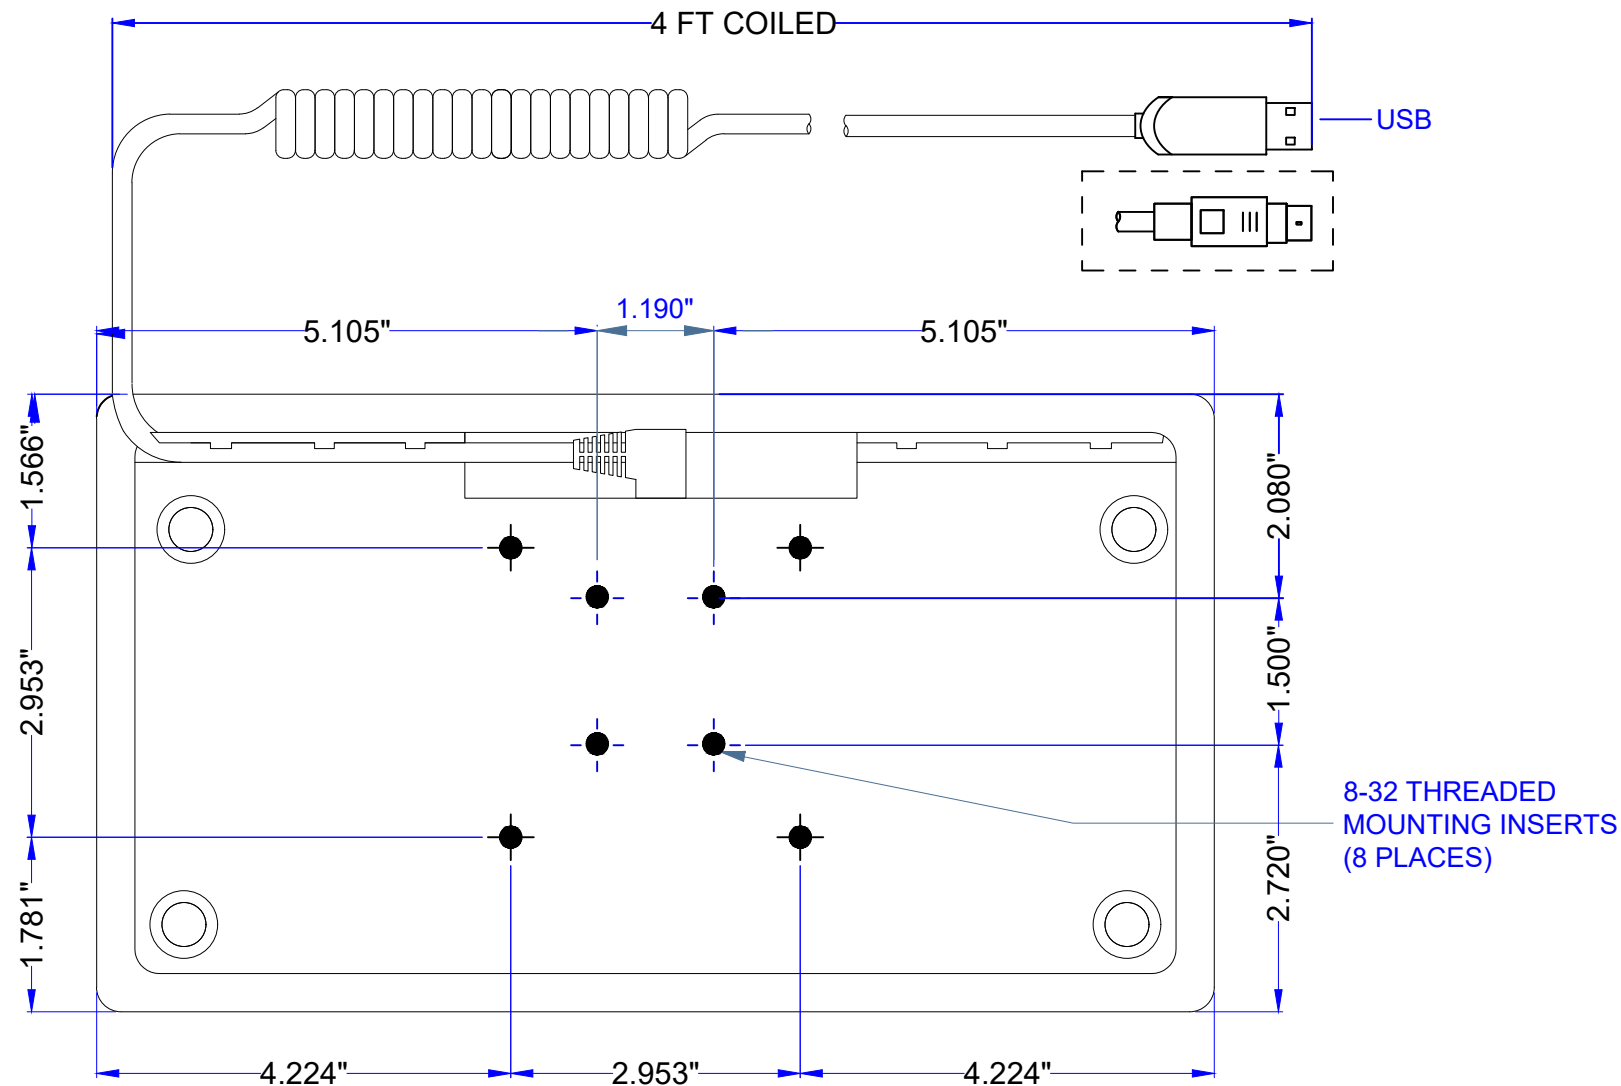

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
2621 Ridgpoint Dr. Suite 235  
Austin, Texas 78754

©2025 iKey, Ltd.  
Voice: (512) 837-0283  
Fax: (512) 927-8530

Part Number: SL-86-911-TP

Drawing Title: SL-86-911-TP-MKT

Drawing Number: MKT0200

Revision: 2.3

Sheet: 2 OF 2

Date: 03.21.25

ADD