


SL-86-911-TP

DATE	CHANGES	INTL	REV
02.21.07	Original		1.0
06.12.09	Updated Format and Drawing Number	JB	2.0
01.05.11	Updated Temp Spec	JMW	2.1
01.24.11	Changed lineweights	TWH	2.2
04.08.25	Updated mounting to VESA pattern	ADD	2.3

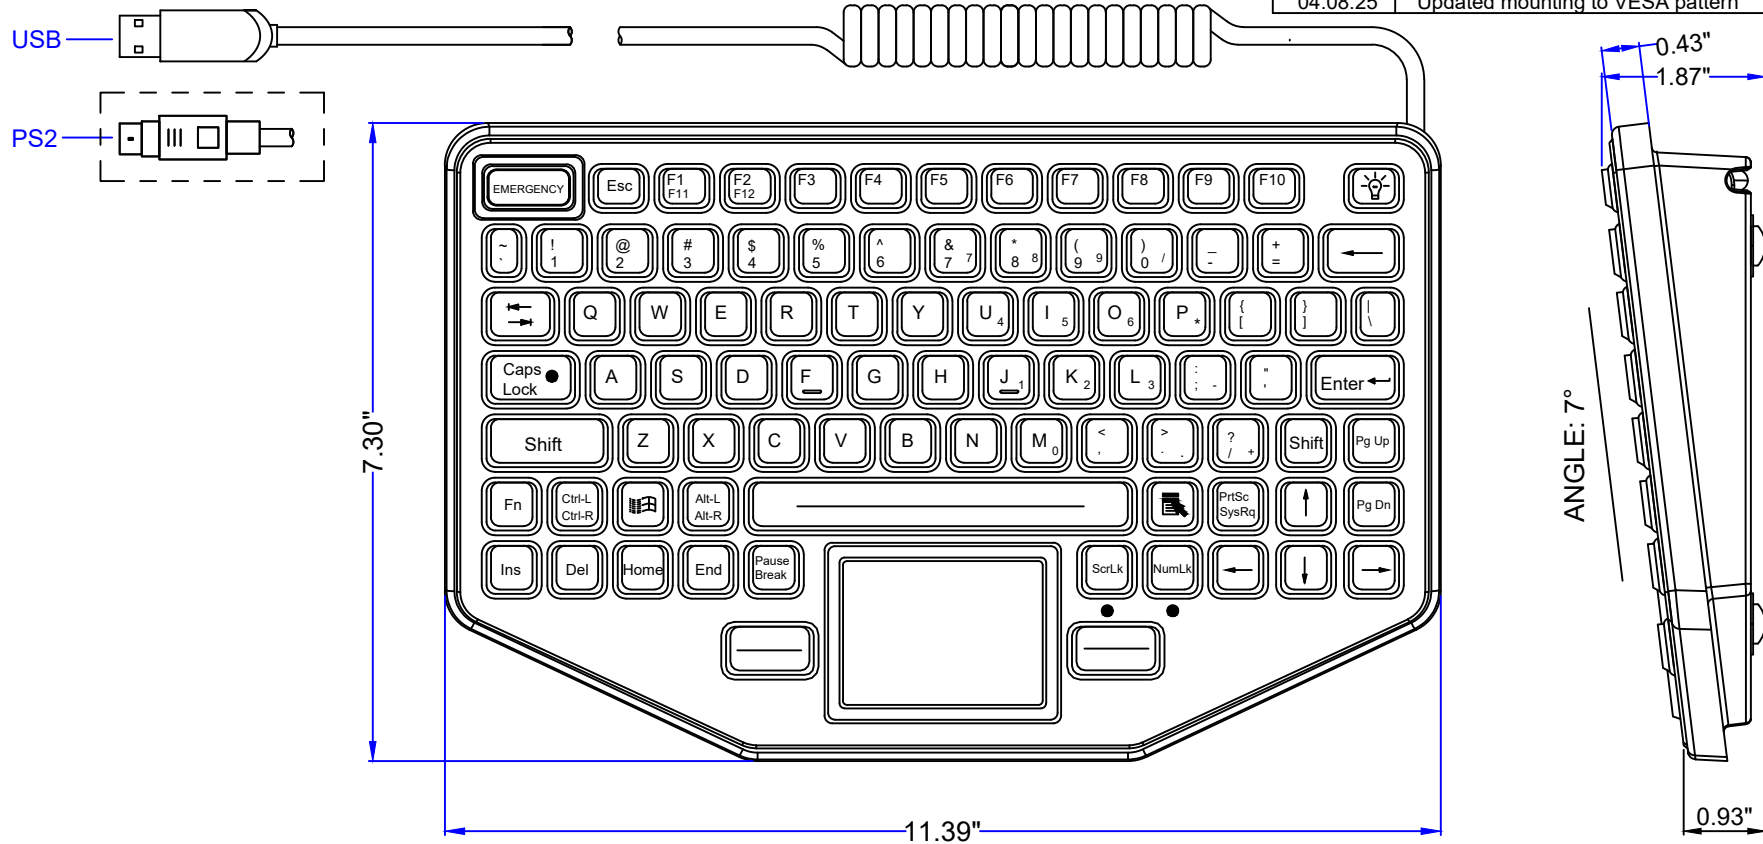

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

POWER

PS2:
 KEYBOARD: 200mA@5V (from Keyboard port)
 TOUCH PAD: 10mA@5V (from Mouse port)
 USB: 210mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axes

WEIGHT

2.25 lbs +/- 0.10 lbs (1.02 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2.25



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2025 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: SL-86-911-TP

Drawing Title: SL-86-911-TP-MKT

Drawing Number: MKT0200


Revision: 2.3

Sheet: 1 OF 2

Date: 04.08.25

ADD

SL-86-911-TP BACK / MOUNTING

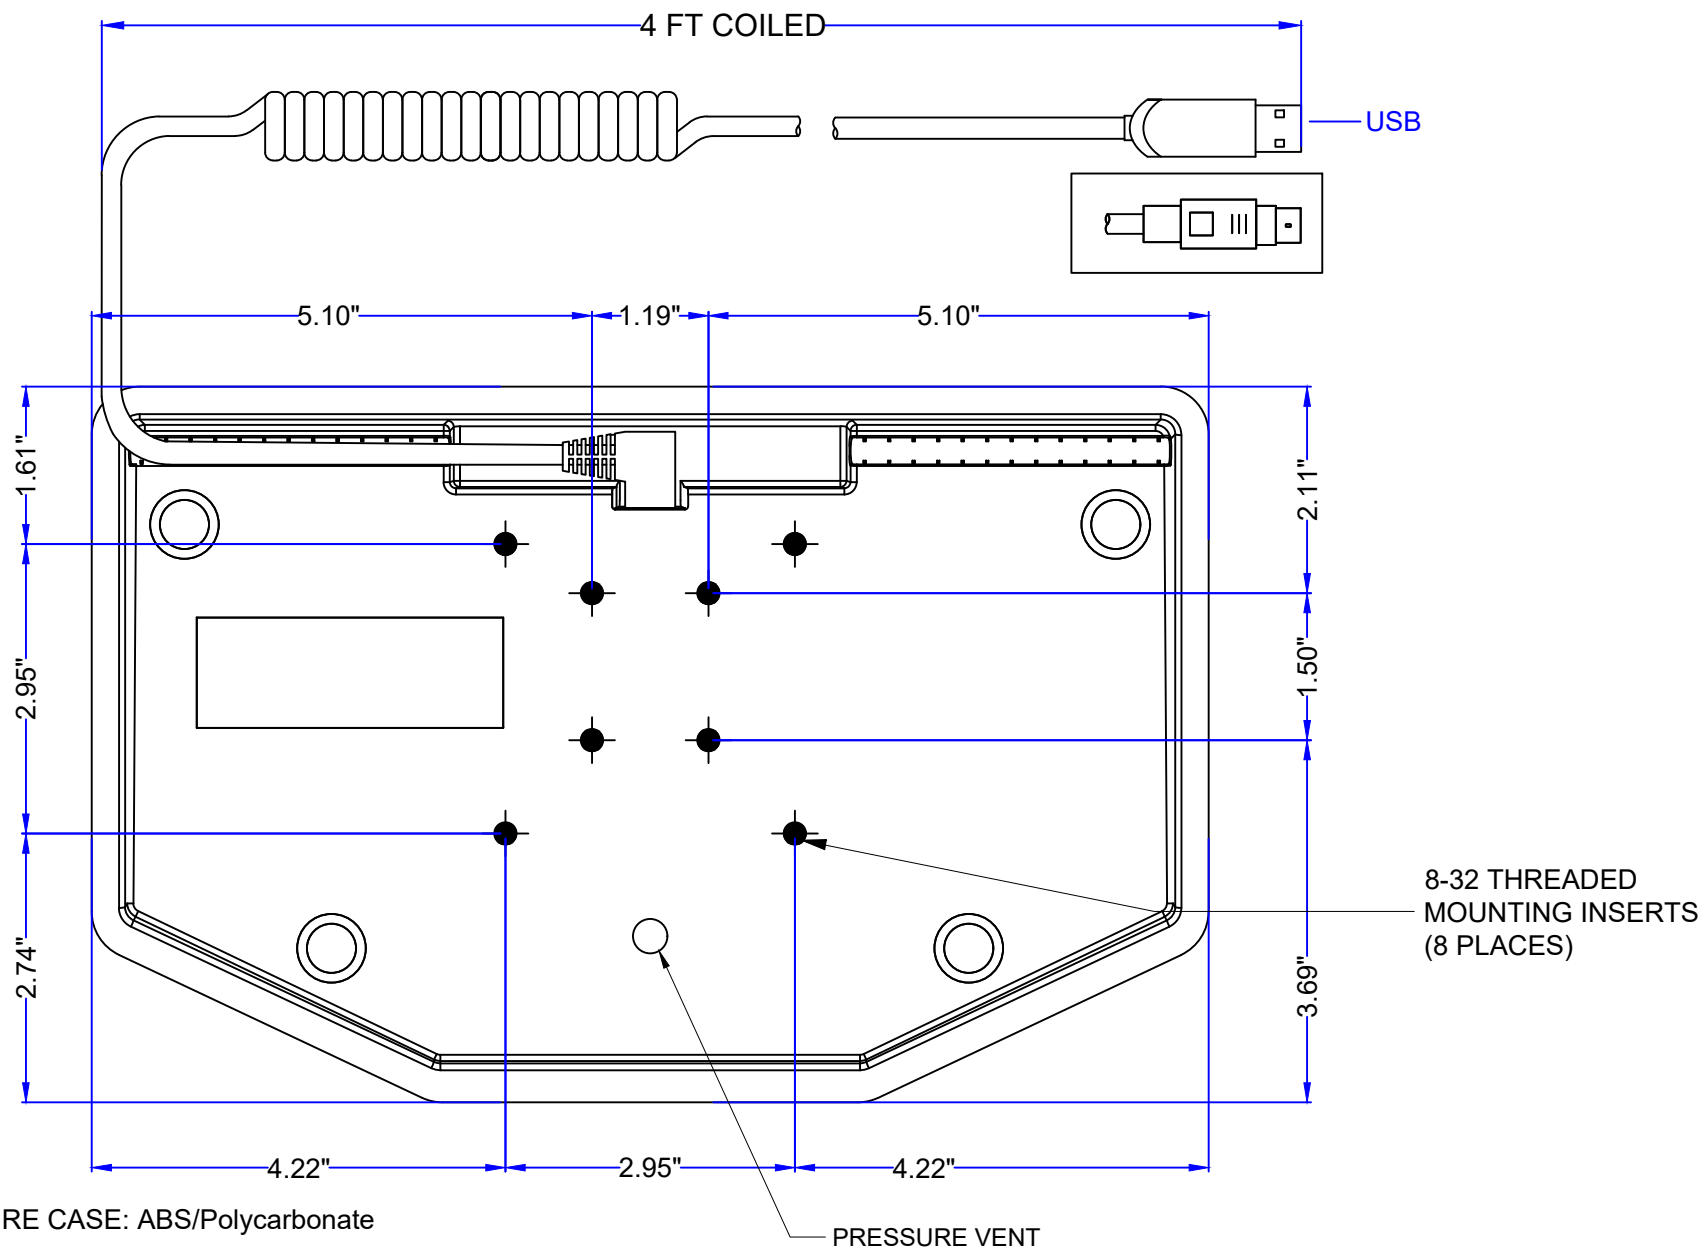

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

 iKey, Ltd. 2621 Ridgpoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 837-0283 Fax: (512) 927-8530	Part Number: SL-86-911-TP	Drawing Number: MKT0200	Sheet: 2 OF 2	
	Drawing Title: SL-86-911-TP-MKT	Revision: 2.3	Date: 04.08.25	ADD