


# SL-86-911-TP-RC-SLIM

DATE	CHANGES	INTL	REV
03.12.26	Original	TDF	1.0

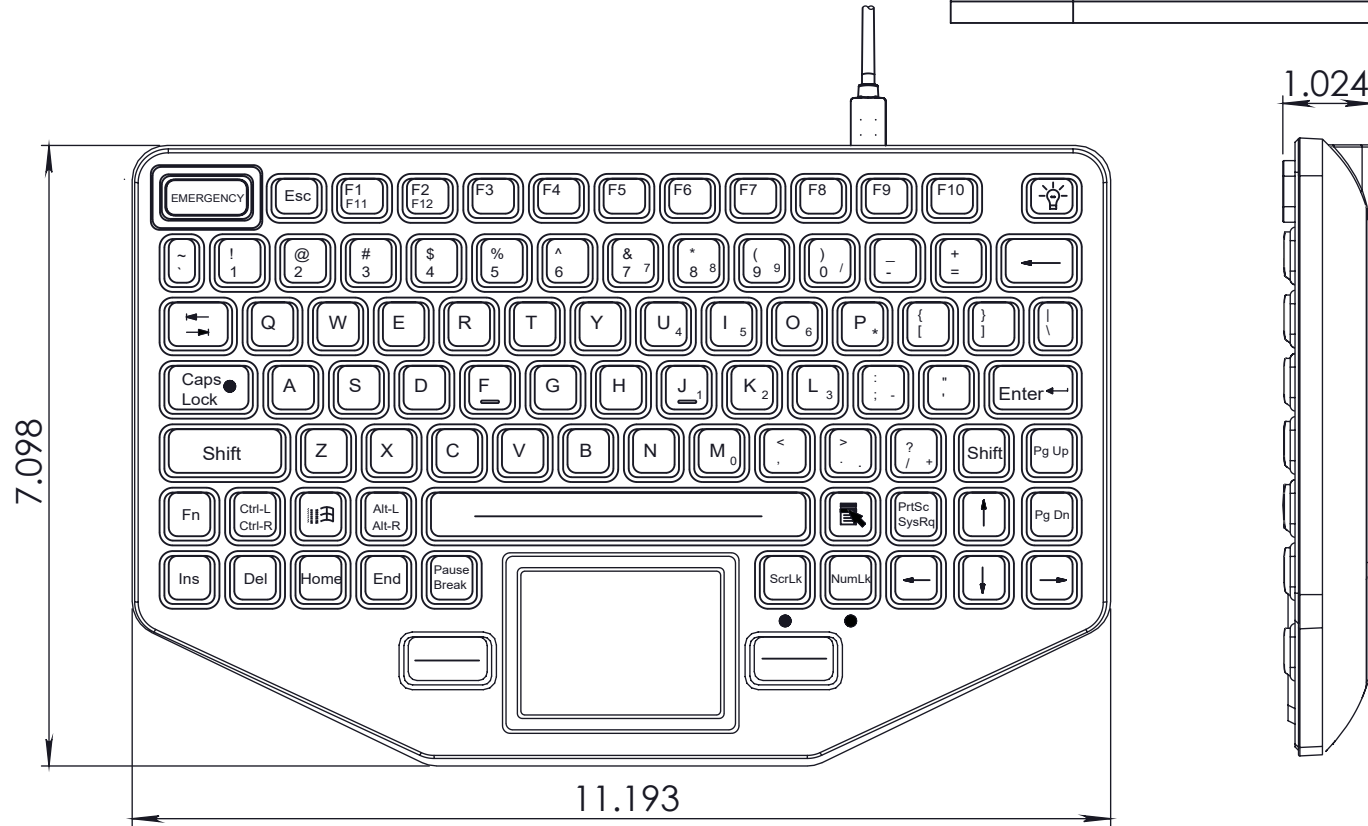

## KEY SWITCH

**MATERIAL:** Industrial Silicone Rubber  
**LIFE:** Greater Than 10 Million Cycles  
**TRAVEL:** 0.055 in.  
**ACTUATION FORCE:** 7.05 oz. +/- 1.06oz (200g +/- 30g)  
**FEEDBACK:** Tactile with Mechanical Snap

## TEMPERATURE RANGE

**STORAGE:** -40°F to +194°F (-40°C to +90°C)  
**OPERATING:** -40°F to +158°F (-40°C to +70°C)

## VIBRATION

**POWER SPECTRAL DENSITY:** .04g<sup>2</sup>/HZ  
**FREQUENCY RANGE:** 20Hz-2Khz  
**DURATION OF TEST PER AXIS:** 3 hours

## POWER

**USB:** 210mA@5V (from CPU port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axes

## WEIGHT

1.56 lbs +/- 0.10 lbs (1.02 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2.25



**iKey, Ltd.**  
 2621 Ridgpoint Dr. Suite 235  
 Austin, Texas 78754  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

©2026 iKey, Ltd.

Part Number: SL-86-911-TP-RC-SLIM

Drawing Number: MKT0555

Sheet: 1 OF 2


Drawing Title: SL-86-911-TP-RC-SLIM-MKT

Revision: 1.0

Date: 03.12.26

TDF

# SL-86-911-TP-RC-SLIM BACK / MOUNTING

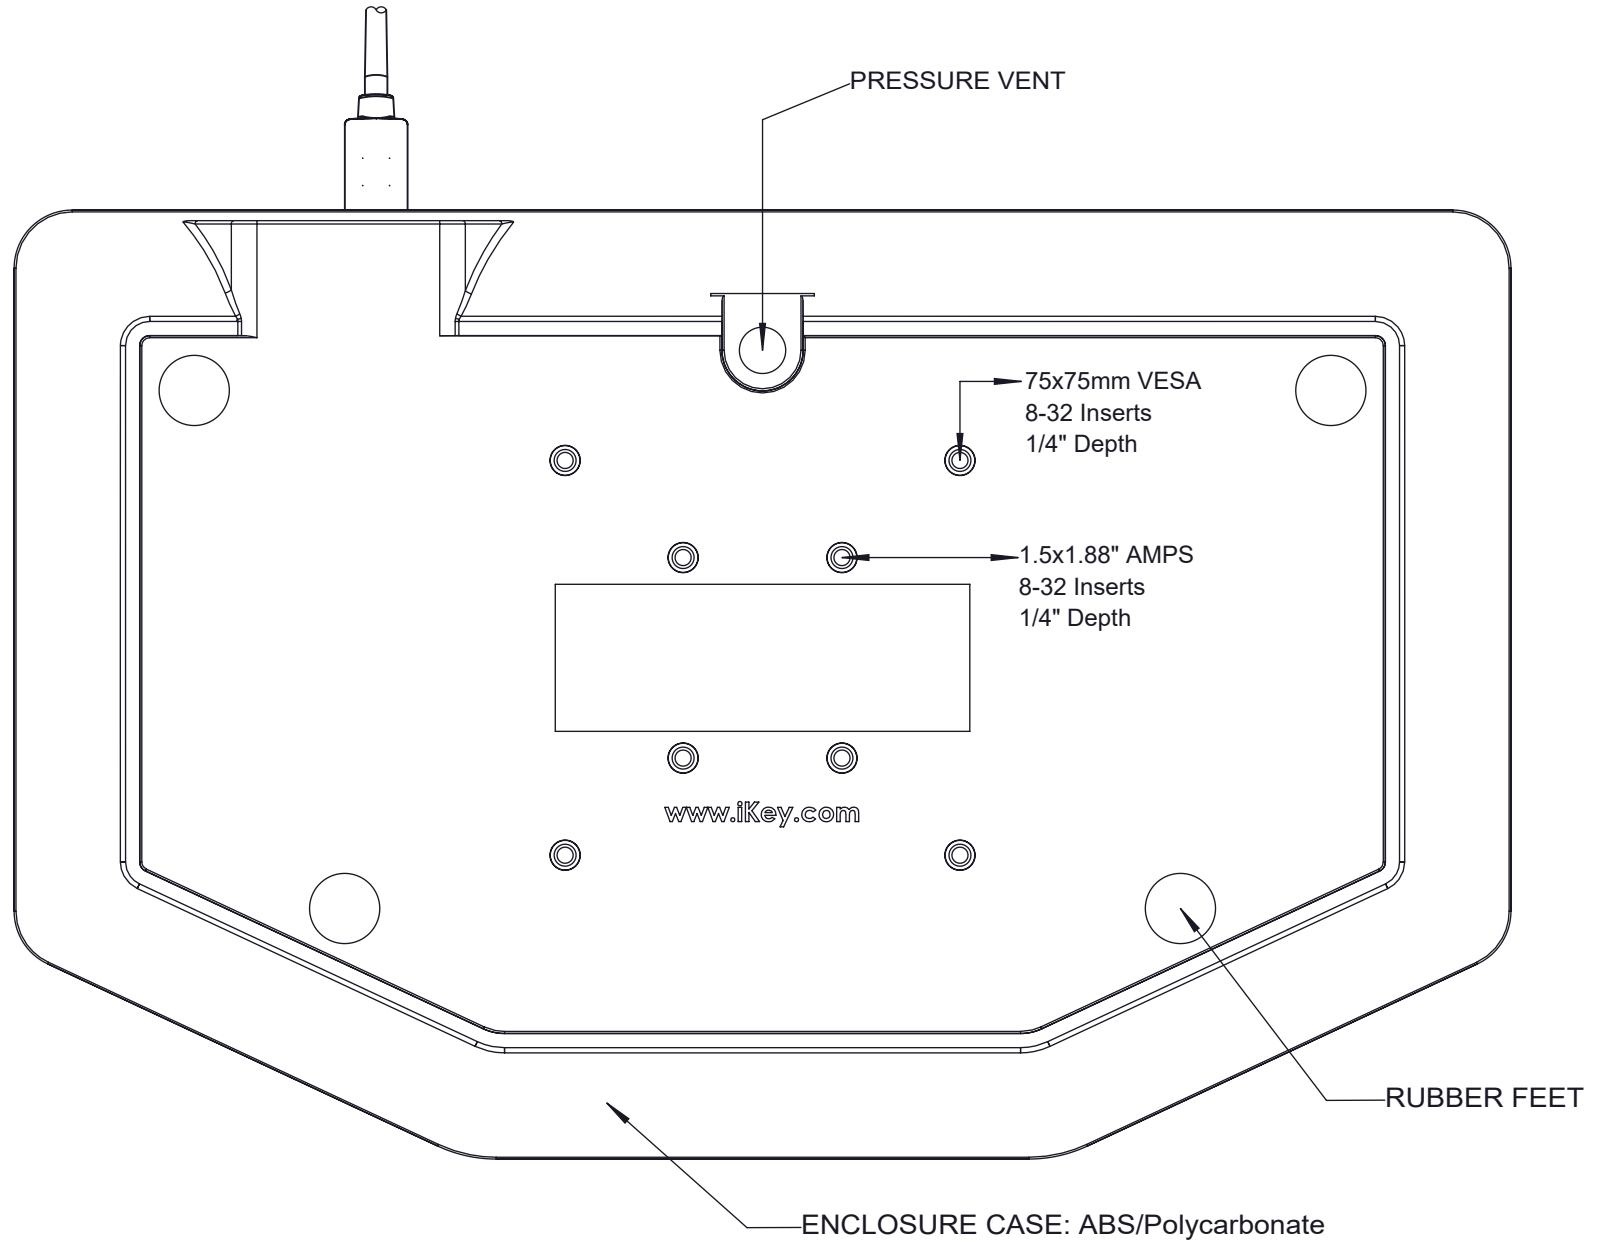

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:1.5

**iKey** iKey, Ltd.  
 2621 Ridgpoint Dr. Suite 235  
 Austin, Texas 78754  
 Voice: (512) 937-0283  
 Fax: (512) 927-8530

Part Number: SL-86-911-TP-RC-SLIM

Drawing Number: MKT0555

Sheet: 2 OF 2

Drawing Title: SL-86-911-TP-RC-SLIM-MKT

Revision: 1.0

Date: 03.12.26

TDF