


SLK-101-8L-USB

DATE	CHANGES	INTL	REV
04.22.09	Original	JB	1.00
10.25.12	Changed to slim case	TH	1.1

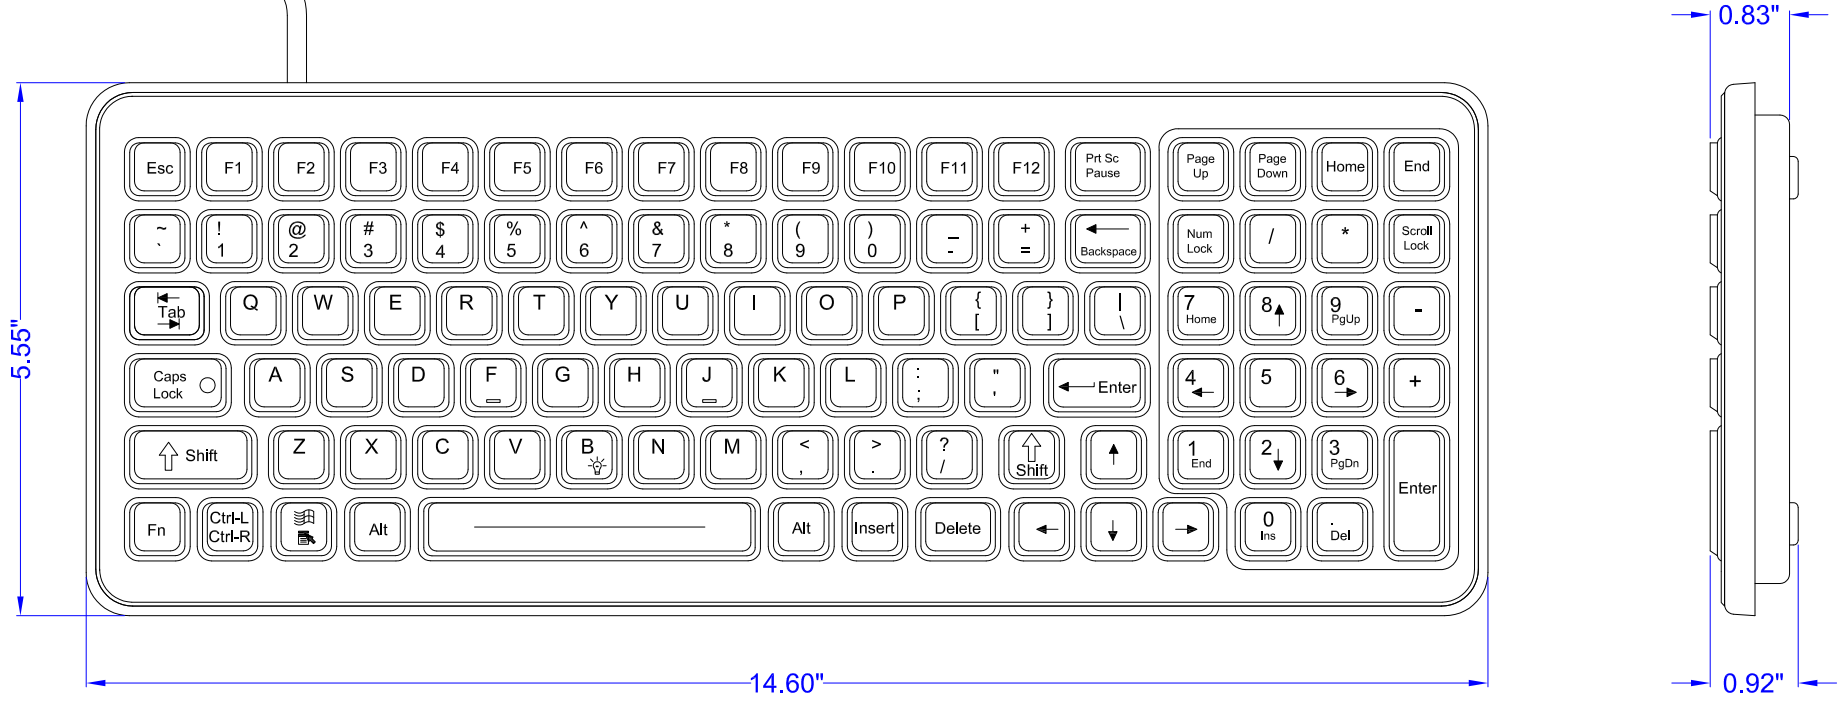

FEATURES AND BENEFITS

- 14.50" x 5.50" x 1.56" (w-h-d)
- 10-Key Numeric Pad
- 12 Function Keys
- Built-In Mounting Holes
- Integrated Backlighting
- MS Windows™ Function Keys
- MIL-461 Compatibility
- Six Layer PCB With Internal Dedicated Ground Plane Layers
- Green Backlight
- Eight Level Backlight Sequence (Off - 10% - 20% - 50% - 100% - 50% - 20% - 10% - Off)
- Available With Green NVIS Compatible Backlight

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

POWER

USB: 210 mA@5V (from CPU port)

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2012 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: SLK-101-8L-USB
 Drawing Title: SLK-101-8L-USB-MKT

Drawing Number: MKT0189
 Revision: 1.1

Sheet: 1 OF 1
 Date: 10.25.12
 TWH