


# SLK-79

DATE	CHANGES	INTL	REV
11.21.08	Original	JB	1.0
06.25.09	Updated Dimension Accuracy	JB	2.0
03.13.12	Updated Operating Temperature	TH	2.1

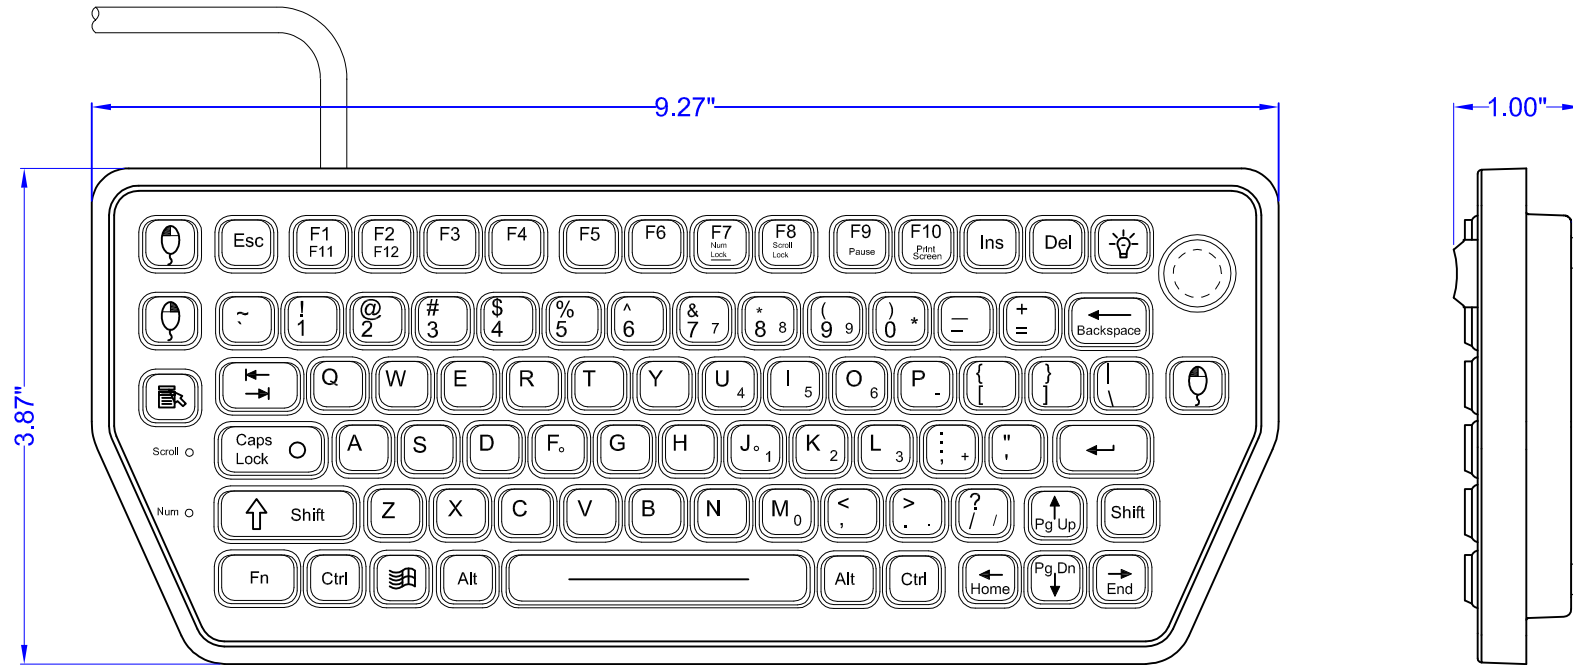

## KEY SWITCH

**MATERIAL:** Industrial Silicone Rubber  
**LIFE:** Greater Than 10 Million Cycles  
**TRAVEL:** 0.055 in.  
**ACTUATION FORCE:** 4.76 oz. +/- 1.06oz (135g +/- 30g)  
**FEEDBACK:** Tactile with Mechanical Snap

## POWER

**PS2:**  
**KEYBOARD:** 200mA@5V (from Keyboard port)  
**POINTER:** 35mA@5V (from Mouse port)  
**USB:** 235mA@5V (from CPU port)

## TEMPERATURE RANGE

**STORAGE:** -40°F to +158°F (-40°C to +70°C)  
**OPERATING:** -4°F to +140°F (-20°C to +60°C)

## HUMIDITY

100% Humidity Resistant

## VIBRATION

**POWER SPECTRAL DENSITY:** .04g<sup>2</sup>/HZ  
**FREQUENCY RANGE:** 20Hz-2Khz  
**DURATION OF TEST PER AXIS:** 3 hours

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

## WEIGHT

1.00 lbs +/- 0.10 lbs (0.45 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:1.5



iKey, Ltd.

2621 Ridgepoint Dr. Suite 235  
Austin, Texas 78754

©2012 iKey, Ltd.  
Voice: (512) 837-0283  
Fax: (512) 927-8530

Part Number: SLK-79

Drawing Title: SLK-79-MKT

Drawing Number: MKT0154

Revision: 2.1

Sheet: 1 OF 1

Date: 03.13.12

TWH