
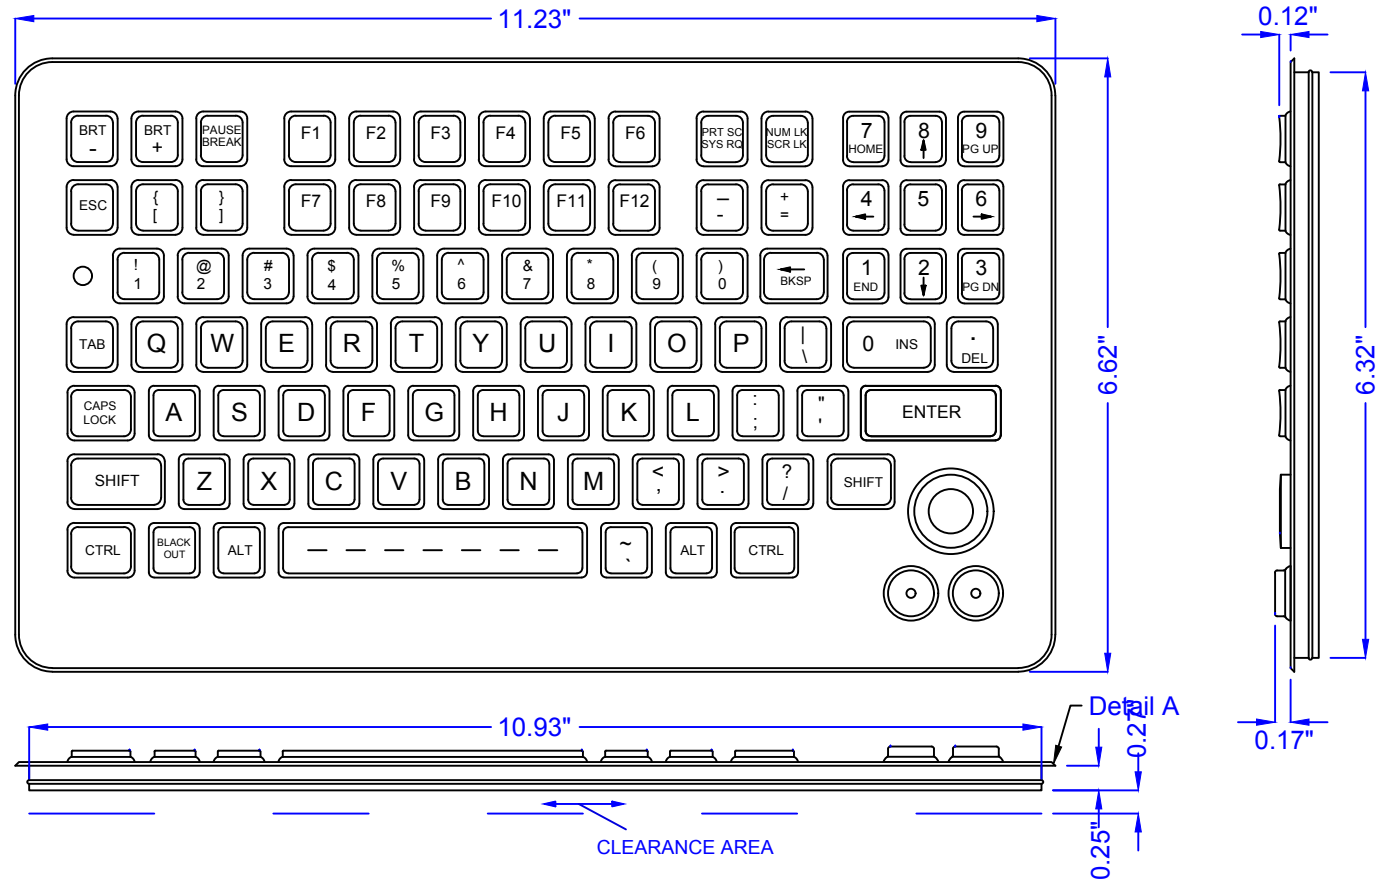


# SLK-880-FSR-OEM

DATE	CHANGES	INTL	REV
09.30.08	Original	JB	1.00
03.06.17	Added connector location details (Pg. 2)	AH	1.1

## NOTES:

- UNIT IS MOUNTED USING RTV ADHESIVE AND #4-40 x 1/4" MOUNTING SCREWS (18 PLACES)
- TALLEST COMPONENT EXTENDS 0.250" BELOW KEYPAD



## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 6.35 oz. +/- 0.71oz (180g +/- 20g)  
 FEEDBACK: Tactile with Mechanical Snap

## POWER

USB:  
 300mA@5V (from CPU port)

## TEMPERATURE RANGE

STORAGE: -40°F to +167°F (-40°C to +75°C)  
 OPERATING: -40°F to +158°F (-40°C to +70°C)

## HUMIDITY

100% Humidity Resistant

## VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

## WEIGHT

1.25 lbs +/- 0.10 lbs (0.57 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
 2621 Ridgpoint Dr. Suite 235  
 Austin, Texas 78754


©2017 iKey, Ltd.  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

Part Number: SLK-880-FSR-OEM  
 Drawing Title: SLK-880-FSR-OEM-MKT

Drawing Number: MKT0150  
 Revision: 1.1

Sheet: 1 OF 2  
 Date: 03.06.17  
 ALH

# SL-880-FSR-OEM MOUNTING

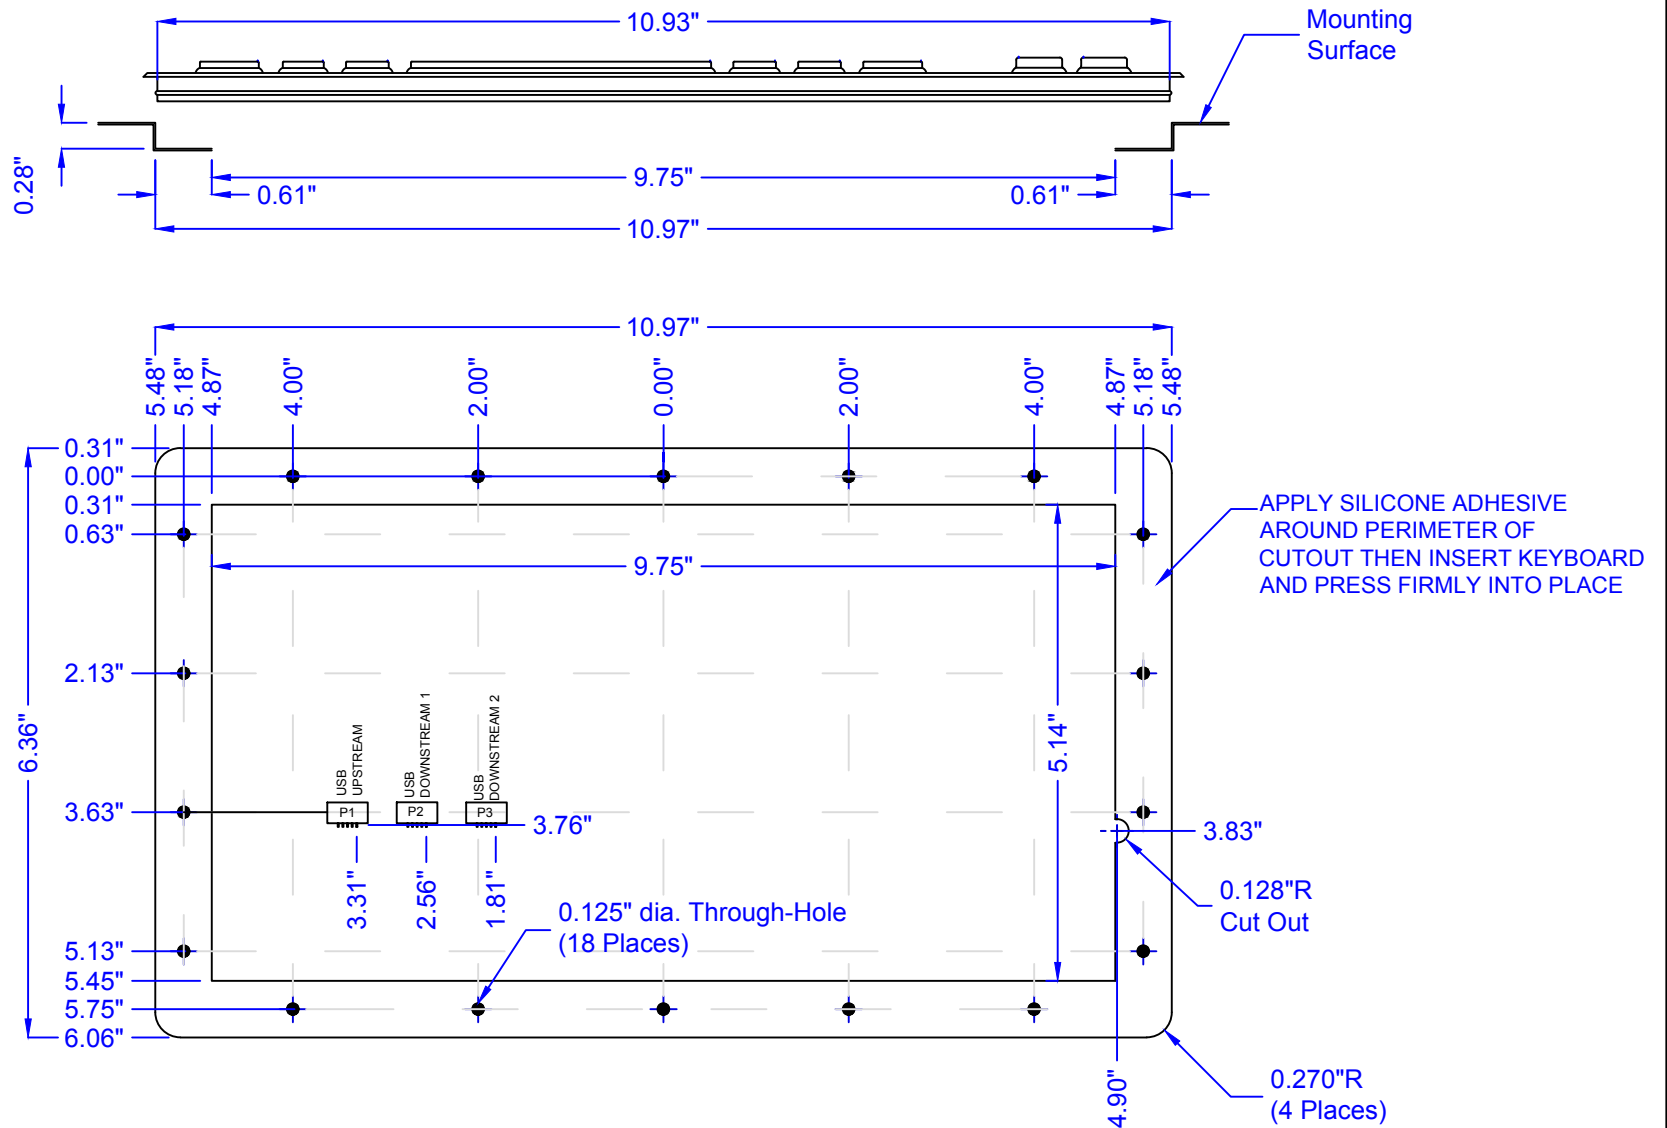

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
2621 Ridgpoint Dr. Suite 235  
Austin, Texas 78754

©2017 iKey, Ltd.  
Voice: (512) 837-0283  
Fax: (512) 927-8530

Part Number: SLK-880-FSR-OEM  
Drawing Title: SLK-880-FSR-OEM-MKT

Drawing Number: MKT0150  
Revision: 1.1

Sheet: 2 OF 2  
Date: 03.06.17  
ALH