


SLP-102-FSR

DATE	CHANGES	INTL	REV
05.19.09	Original	JB	1.0
11.05.25	Updated Logo, Windows and backlight keys	TDF	1.1

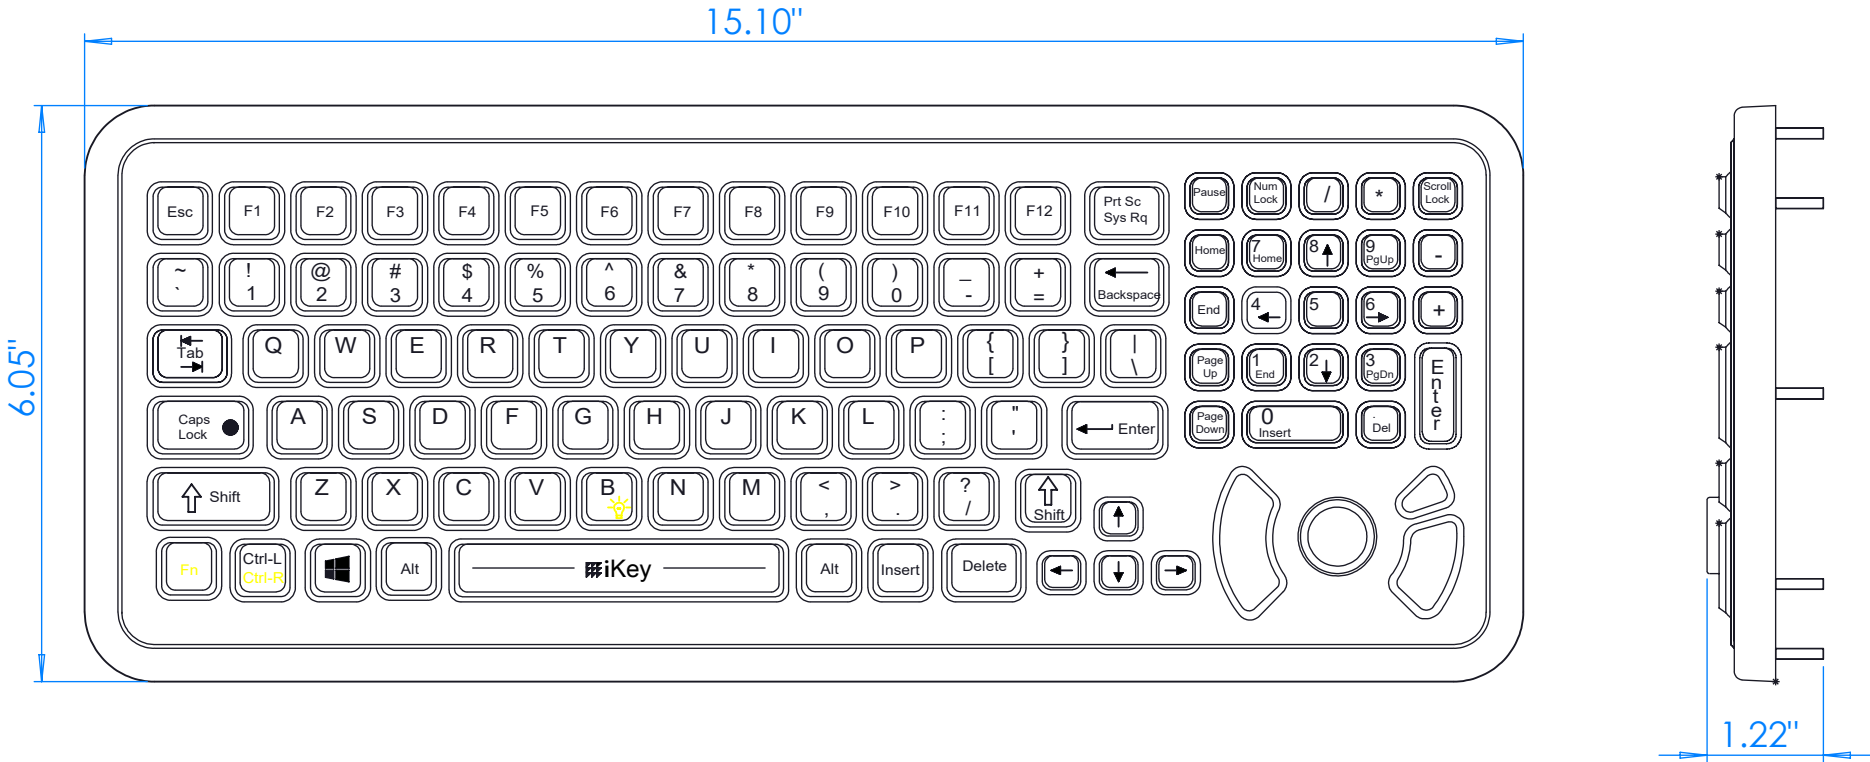

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
OPERATING: -40°F to +158°F (-40°C to +70°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

POWER

PS2:
KEYBOARD: 200mA@5V (from Keyboard port)
POINTER: 35mA@5V (from Mouse port)
USB: 235mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant when properly installed

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT


1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

 iKey, Ltd. 2621 Ridgpoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 837-0283 Fax: (512) 927-8530	Part Number: SLP-102-FSR	Drawing Number: MKT0192	Sheet: 1 OF 2	
	Drawing Title: SLP-102-FSR-MKT	Revision: 1.1	Date: 11.05.25	TDF

SLP-102-FSR BACK / MOUNTING

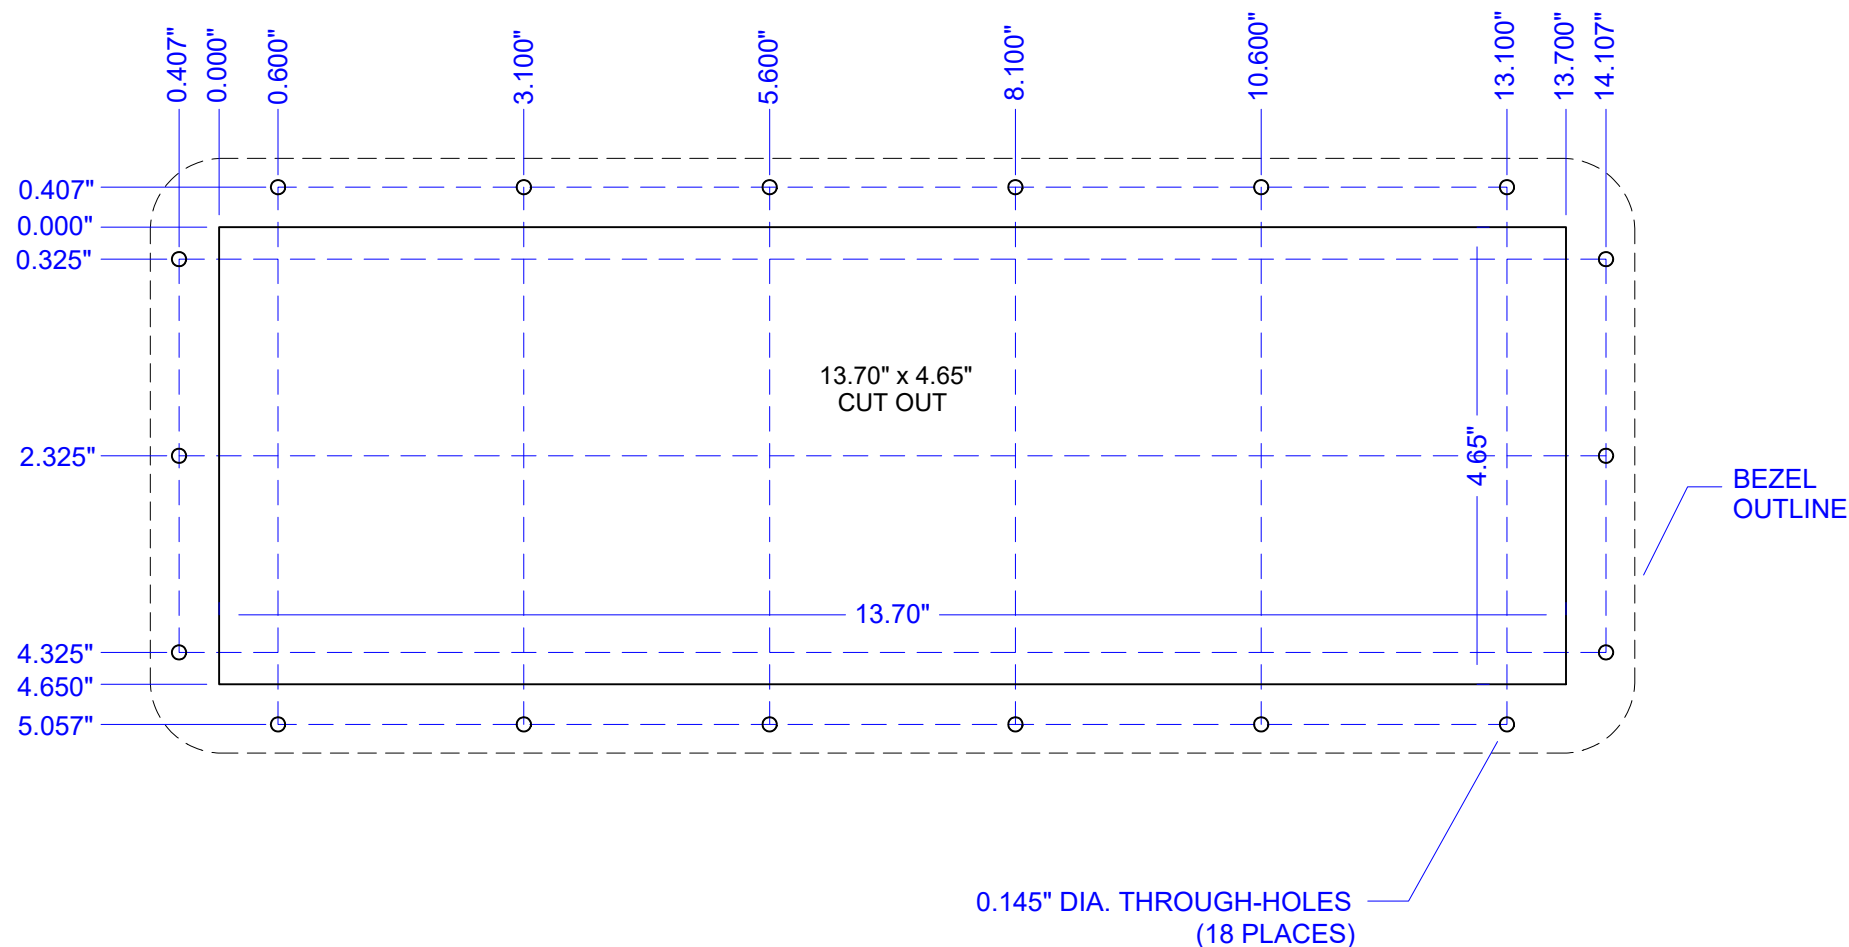

PM BEZEL: ABS/Polycarbonate with #4-40 x 0.50" Metal Studs (18 Places)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

 iKey , Ltd. 2621 Ridgpoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 837-0283 Fax: (512) 927-8530	©2025 iKey, Ltd.		Part Number: SLP-102-FSR		Drawing Number: MKT0192		Sheet: 2 OF 2	
	Drawing Title: SLP-102-FSR-MKT		Revision: 1.1		Date: 11.05.25		TDF	