


SLP-102-FSR

DATE	CHANGES	INTL	REV
05.19.09	Original	JB	1.00

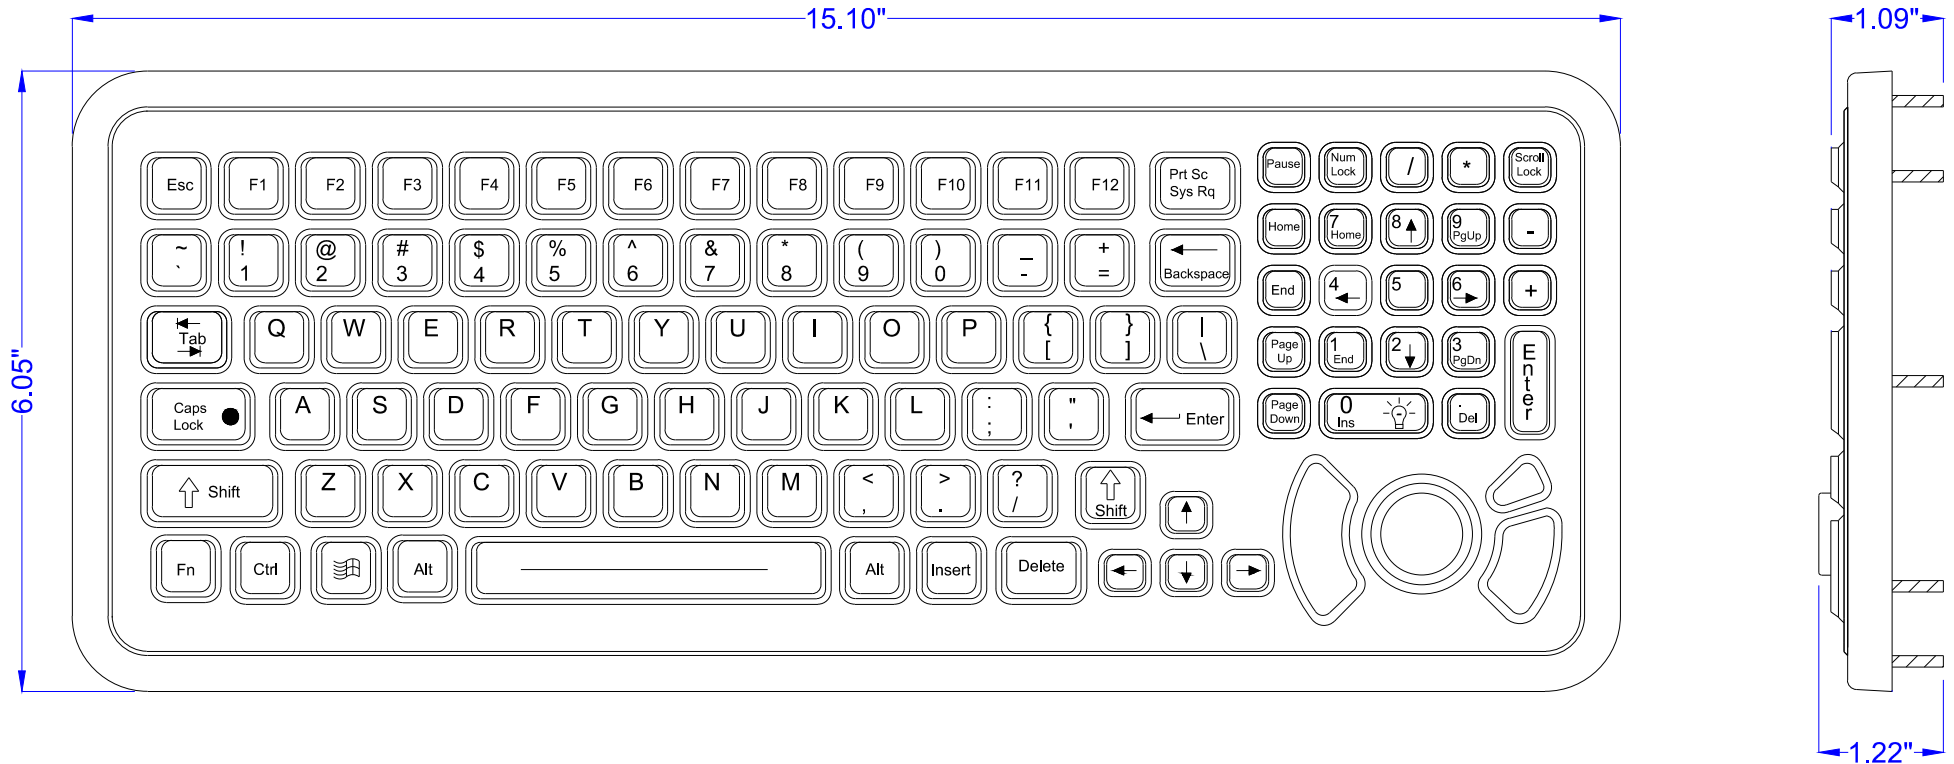

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

PS2:
 KEYBOARD: 210mA@5V (from Keyboard port)
 POINTER: 35mA@5V (from Mouse port)
 USB: 245mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2009 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: SLP-102-FSR

Drawing Title: SLP-102-FSR-MKT

Drawing Number: MKT0192


Revision: 1.00

Sheet: 1 OF 2

Date: 05.19.09

JWB

SLP-102-FSR BACK / MOUNTING

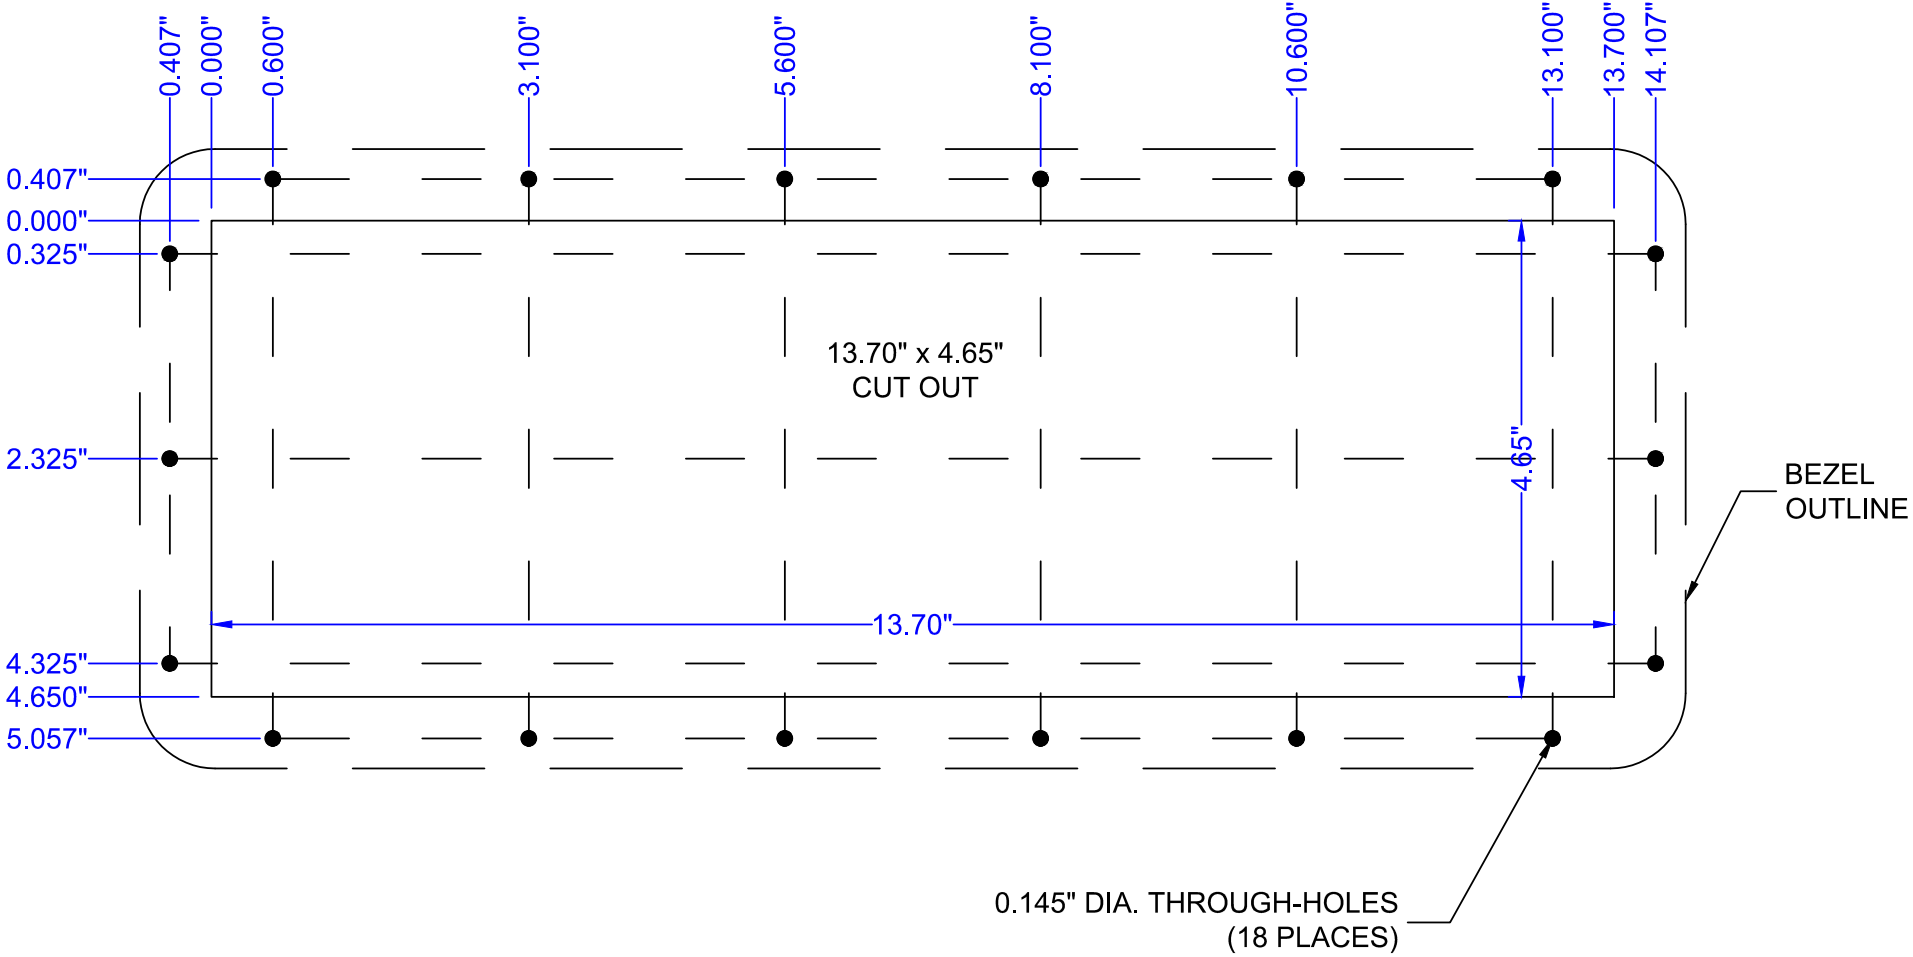

PM BEZEL: ABS/Polycarbonate with #4-40 x 0.50" Metal Studs (18 Places)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2009 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: SLP-102-FSR
Drawing Title: SLP-102-FSR-MKT

Drawing Number: MKT0192
Revision: 1.00

Sheet: 2 OF 2
Date: 05.19.09
JWB