
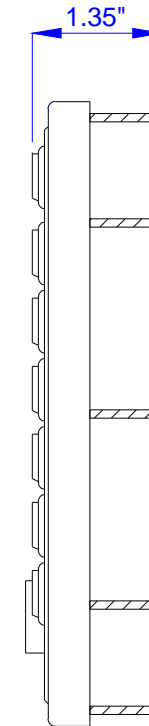


SLP-86-911-FSR

DATE	CHANGES	INTL	REV
04.13.15	Original	SCC	1.0

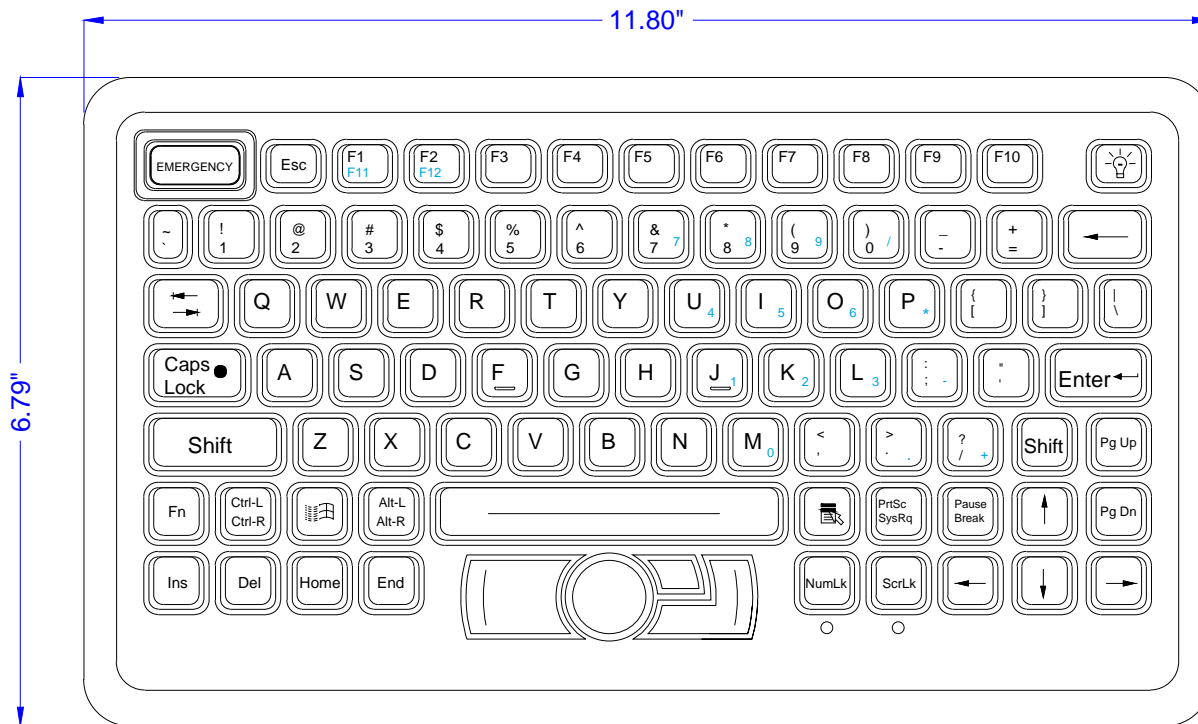

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)
 OPERATING: -4°F to +140°F (-20°C to +60°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

POWER (Maximum)

PS2: KEYBOARD: 160mA@5V (from Keyboard port)
 POINTER: 55mA@5V (from Mouse port)
 *PS2 current ratings valid only when both PS2 lines are connected to host
 USB: 215mA@5V (from USB port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.75 lbs +/- 0.10 lbs (0.79 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754


©2015 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: SLP-86-911-FSR
 Drawing Title: SLP-86-911-FSR-MKT

Drawing Number: MKT1239
 Revision: 1.0

Sheet: 1 OF 2
 Date: 04.13.15
 SCC

SLP-86-911-FSR MOUNTING

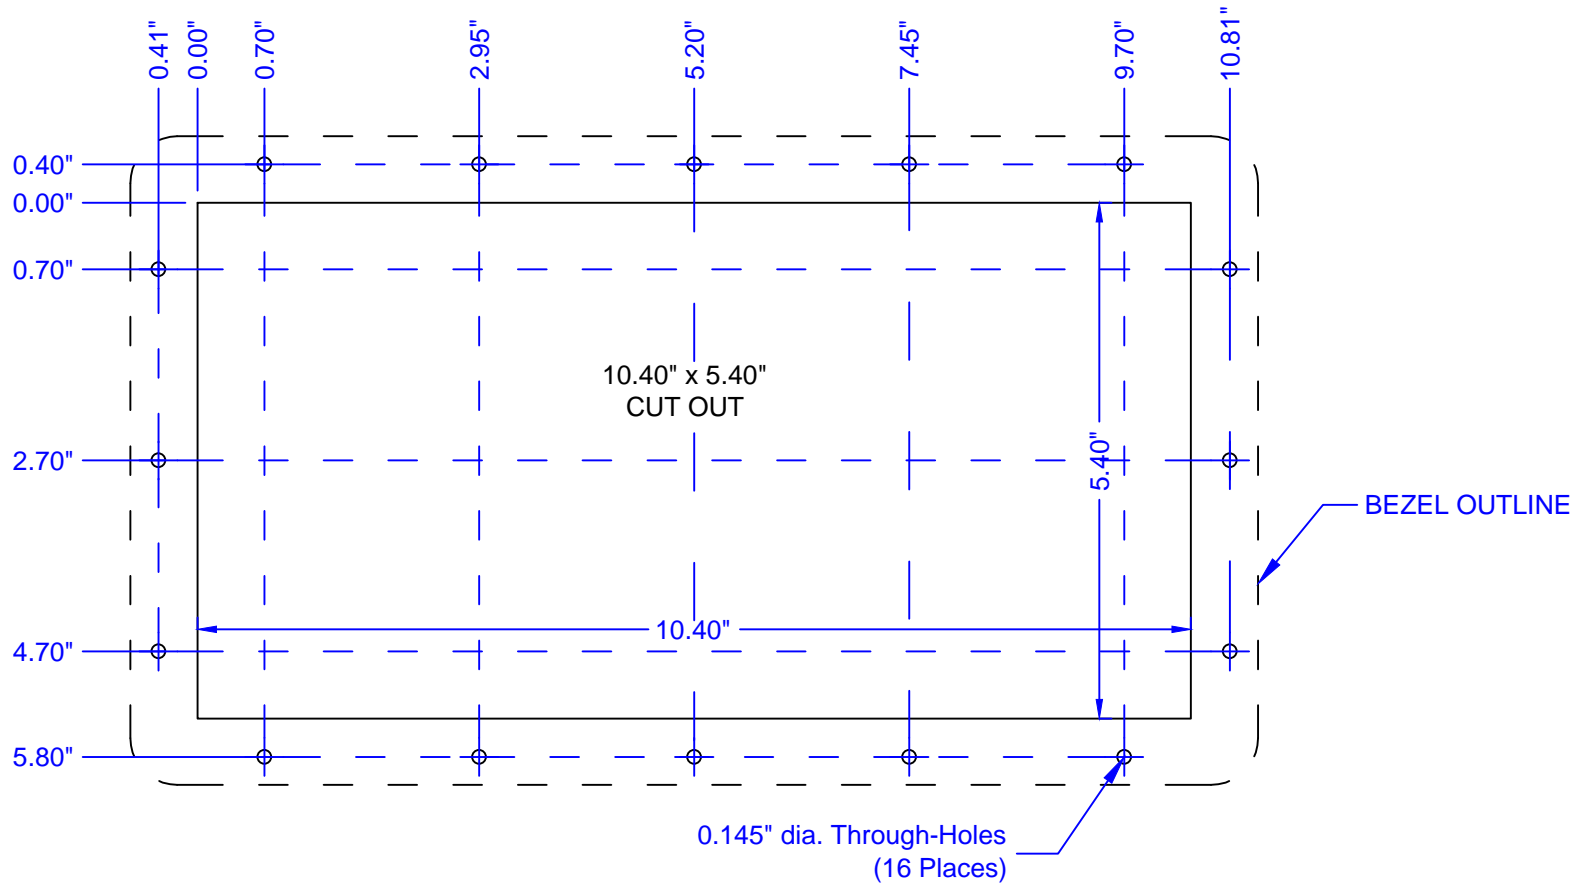

PMU BEZEL: ABS/Polycarbonate with #4-40 x 0.75" Metal Studs (16 Places)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2015 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: SLP-86-911-FSR
Drawing Title: SLP-86-911-FSR-MKT

Drawing Number: MKT1239
Revision: 1.0

Sheet: 2 OF 2
Date: 04.13.15

SCC