


UHP-1535-FSR

DATE	CHANGES	INTL	REV
08.30.11	Original	TH	1.0

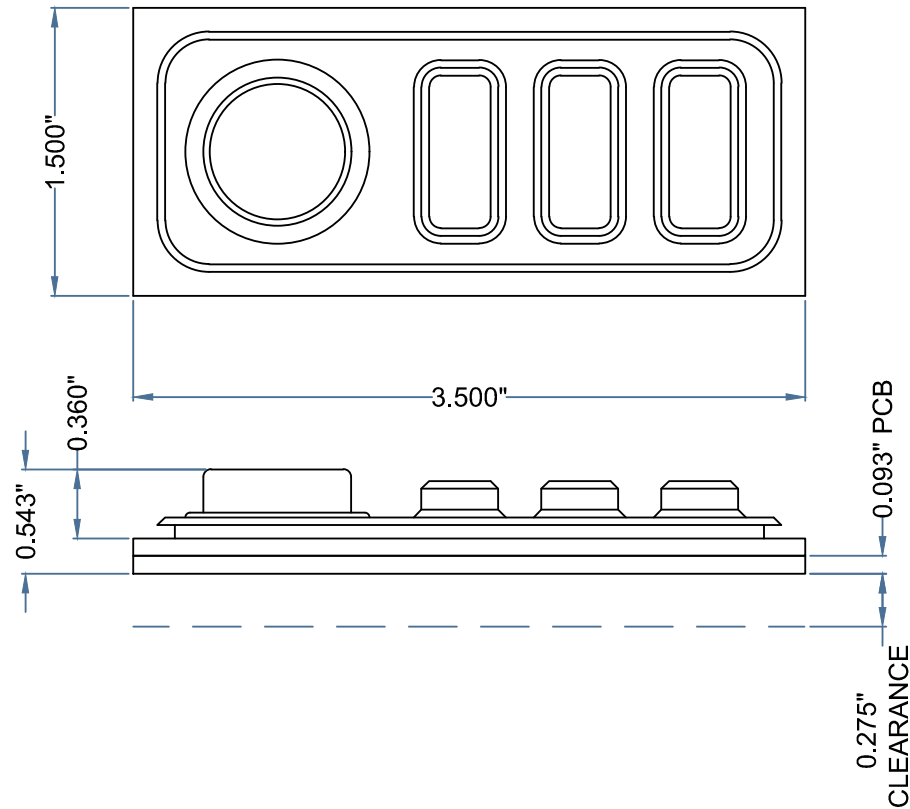

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

PS2 or AT/Serial:
 POINTER: 10mA@5V (from Mouse port)

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2KHz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.00 lbs +/- 0.10 lbs (0.45 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:1



iKey, Ltd.
 2621 Ridgepoint Dr, Suite 235
 Austin, Texas 78754

©2011 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: UHP-1535-FSR

Drawing Number: MKT0273

Sheet: 1 OF 2


Drawing Title: UHP-1535-FSR-MKT

Revision: 1.0

Date: 08.30.11

TWH

UHP-1535-FSR MOUNTING

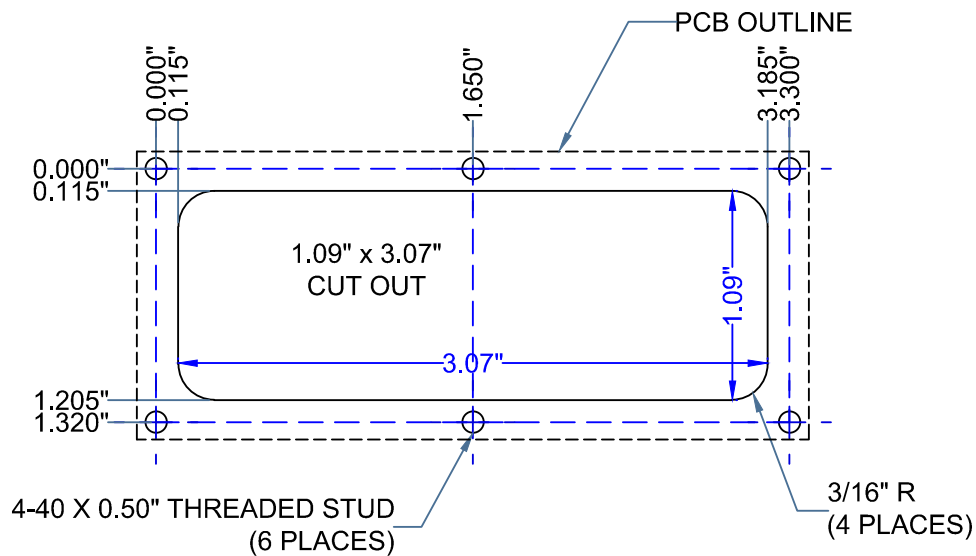

MOUNTING PANEL THICKNESS: 0.06" to 0.08"

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:1